


REV.	DATE	DCN #	DRAWING TREE #
A	07 MAY 2008	E080186	-
B	12 AUG 2008	E080427	-
v2	04 SEP 2012	E1200801	E0900061

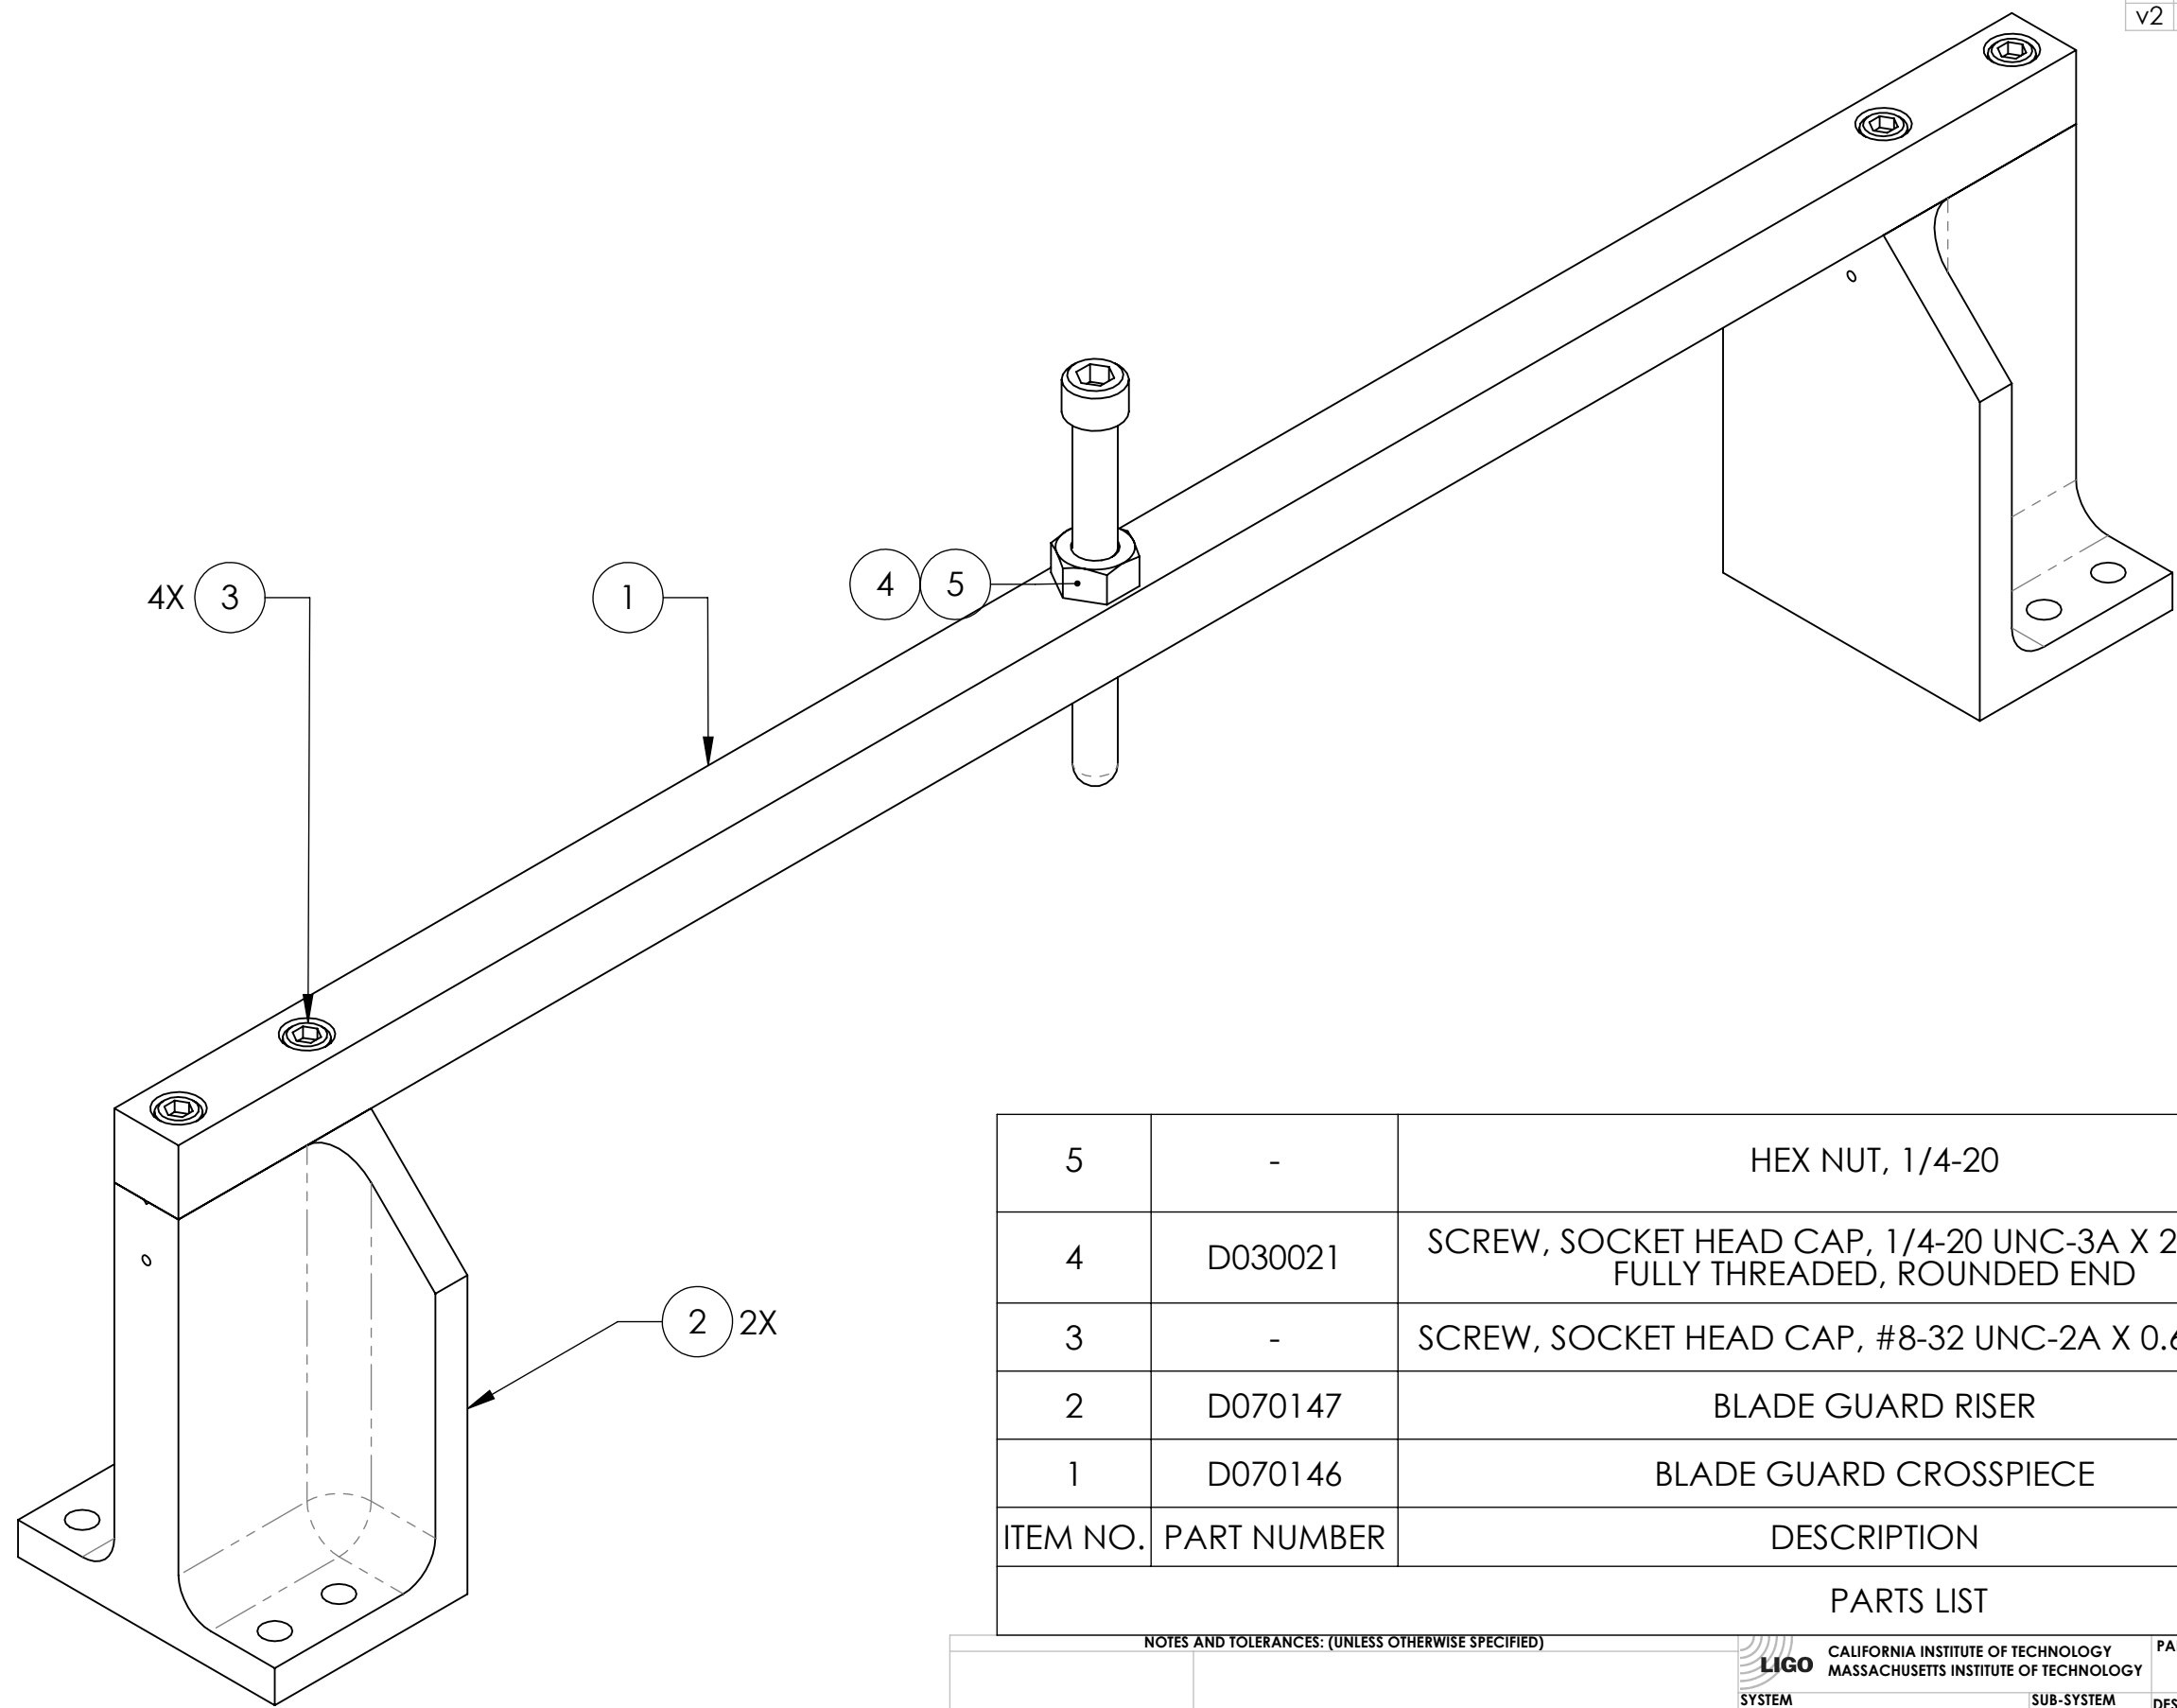

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	REQ	SPARE	TOTAL
5	-	HEX NUT, 1/4-20	Ag-PLATED 300 SSSL	1	1	2
4	D030021	SCREW, SOCKET HEAD CAP, 1/4-20 UNC-3A X 2.5 LONG, FULLY THREADED, ROUNDED END	300 SSSL	1	1	2
3	-	SCREW, SOCKET HEAD CAP, #8-32 UNC-2A X 0.625 LONG	300 SSSL	4	1	5
2	D070147	BLADE GUARD RISER	6061-T6 AL	2	0	2
1	D070146	BLADE GUARD CROSSPIECE	6061-T6 AL	1	0	1

PARTS LIST

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY		PART NAME		TOP BLADE GUARD ASSY	
SYSTEM	ADVANCED LIGO	SUB-SYSTEM	SUS	DESIGNER	D. BRIDGES 24 SEP 2012
				DRAFTER	D. BRIDGES 25 SEP 2012
				CHECKER	B. MOORE 27 SEP 2012
				APPROVAL	
MATERIAL		FINISH		SCALE	PROJECTION
--		-- μinch		1:1	AS SHOWN
NEXT ASSY		OMC OVERALL ASSY		SIZE	DWG. NO.
				B	D070145
				REV.	v2
				SHEET 1 OF 1	

D070145\_Top\_Blade\_Guard\_Assy\_OMC\_PART PDM REV: X-006, DRAWING PDM REV: X-000