
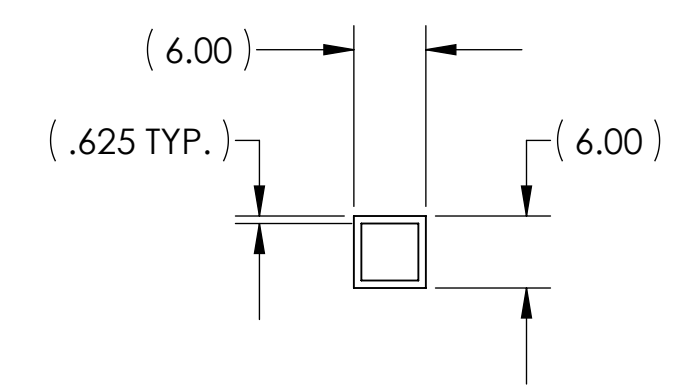
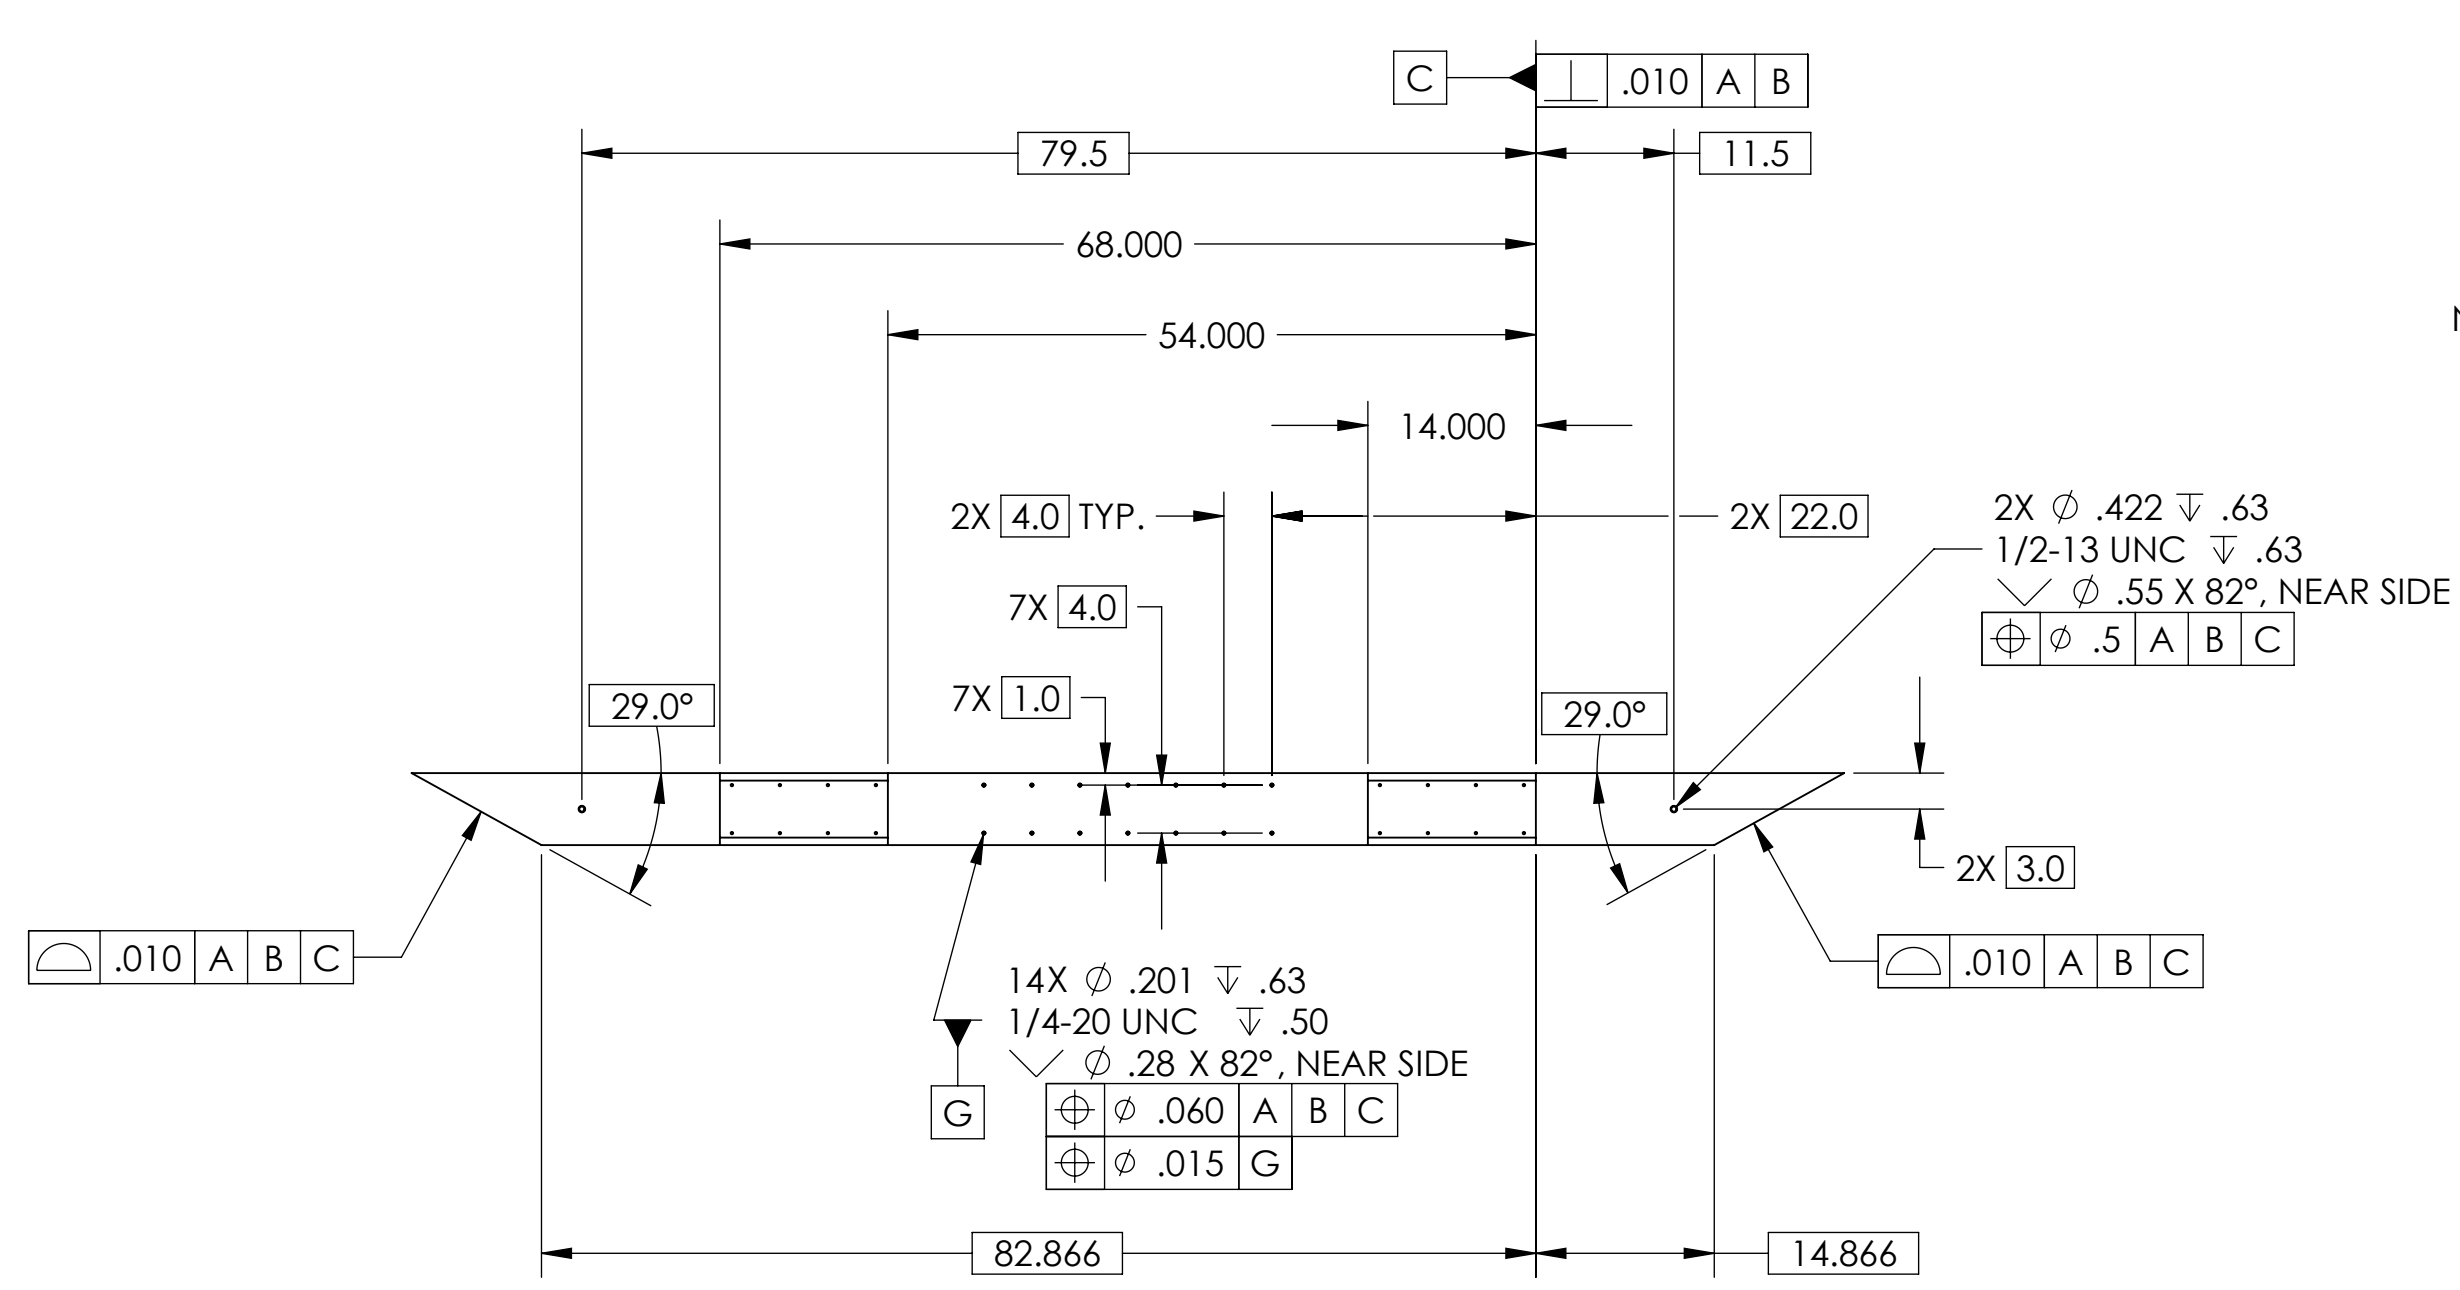
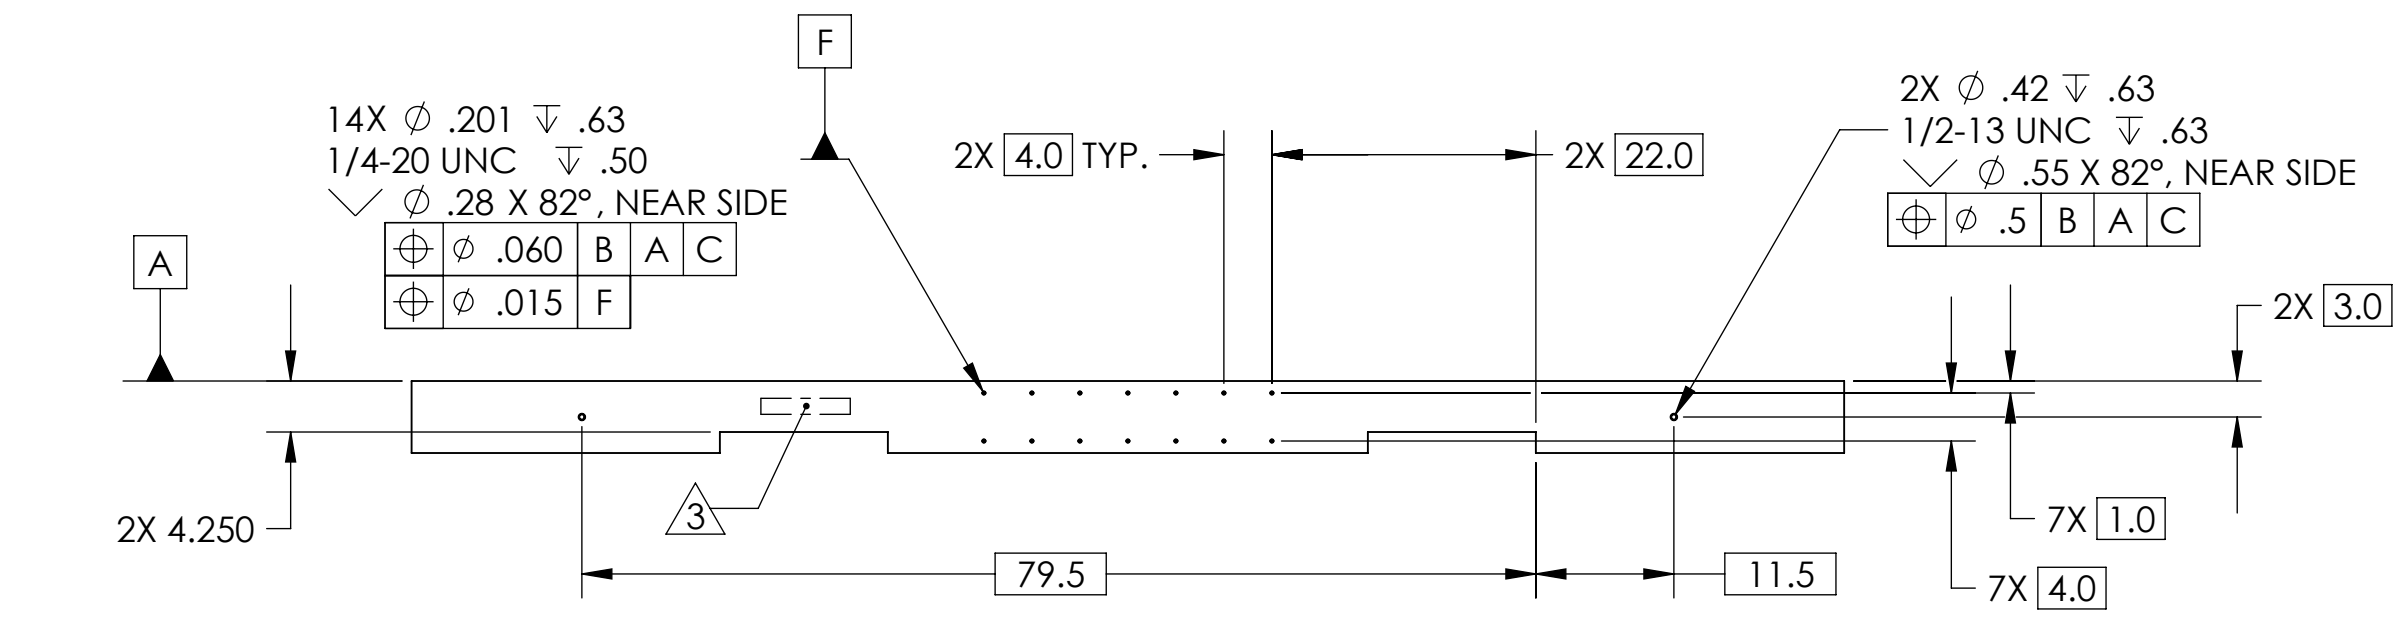
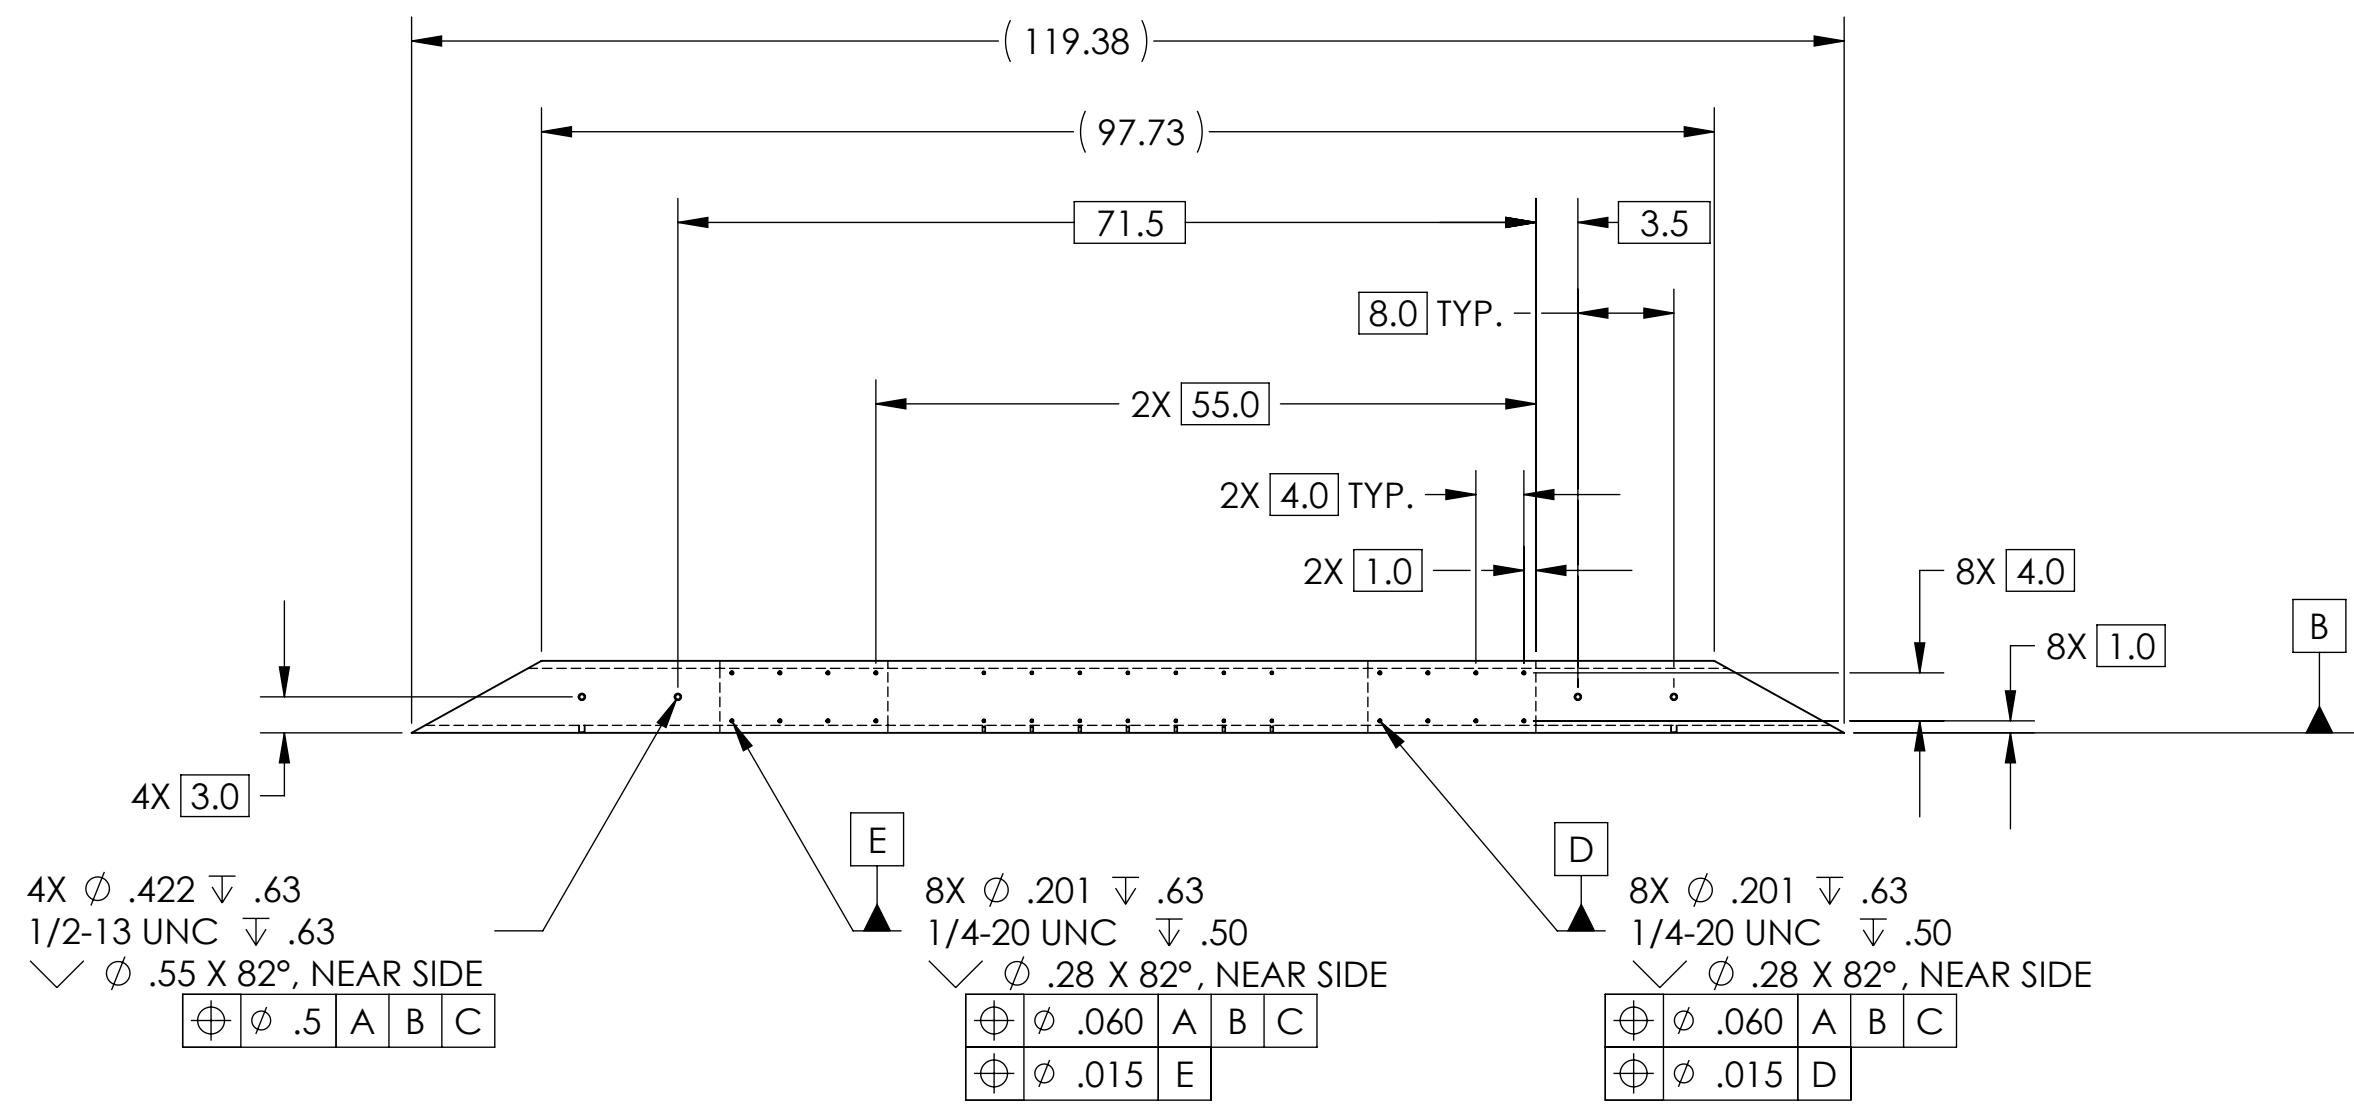


REV	DATE	APPROVAL	DESCRIPTION
00	06/17/2008	A. STEIN	PRE-RELEASE, FOR RFQ.
01	08/04/2008	A. STEIN	PROTOTYPE RELEASE. CHANGED TOLERANCE ON 1/4-20 HOLES. ADDED 8X 1/2-13 HOLES.

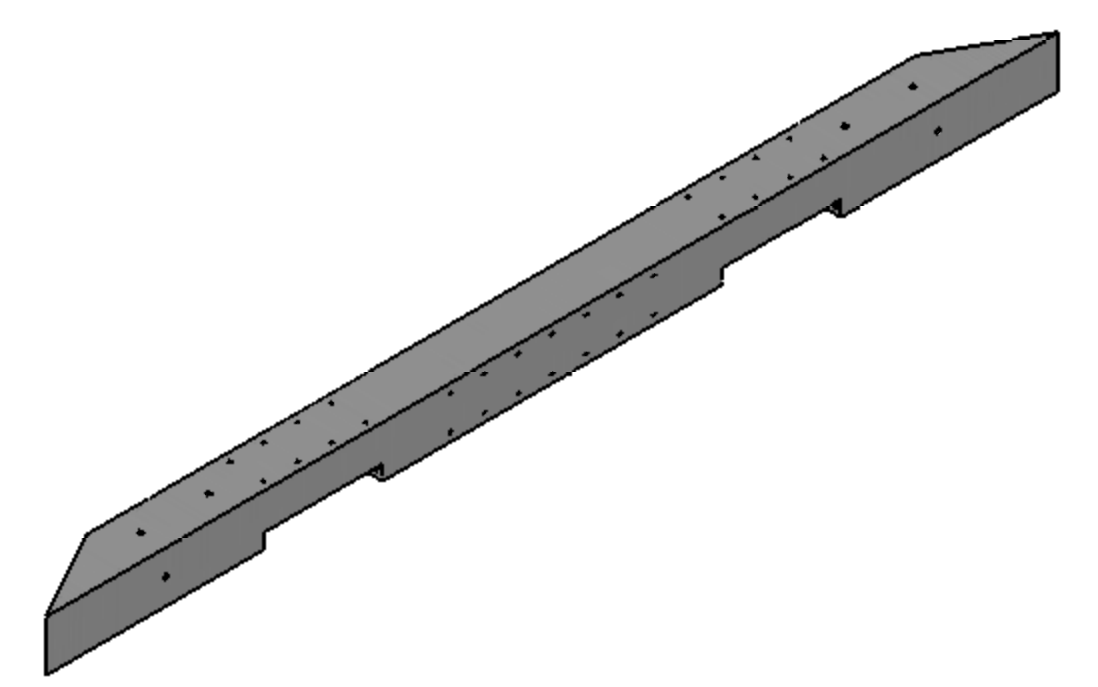

NOTES:

- 1) MAKE FROM 6"X6", 5/8"-WALL THICKNESS STRUCTURAL STEEL TUBE.
- 2) REFER TO DWG. # D080456 FOR TOLERANCES FOR WELDED STRUCTURE. WHERE REASONABLE, PIECE PART TOLERANCES MAY BE LOOSENED, PROVIDED FINAL WELDMENT CONFORMS TO D080456.
- 3) WHERE INDICATED, MECHANICALLY SCRIBE, STAMP, OR ENGRAVE THE FOLLOWING INFORMATION AS SHOWN BELOW: PART NUMBER-REVISION, FOLLOWING ON THE NEXT LINE WITH A UNIQUE 3-DIGIT SERIAL NUMBER STARTING AT 001 FOR THE FIRST PART AND INCREMENTING THEREAFTER. USE 0.12" TALL CHARACTERS UNLESS PART SIZE DICTATES SMALLER. LETTERING MUST BE VISIBLE AFTER PAINTING, IF APPLICABLE.

D080453-01
S/N - ###

NOTES: (UNLESS OTHERWISE SPECIFIED)		DIMENSIONS ARE IN INCHES		CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY IGR, GLASGOW UNIVERSITY GEO 600 GROUP	
1. DO NOT SCALE FROM DRAWING. 2. REMOVE ALL SHARP EDGES. LEAVE .005 X 45° MIN CHAMFER, OR .005 MIN RADIUS. 3. ALL MACHINING FLUIDS MUST BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE AND SILICONE. E.G., MILACRON CIMTECH 410 4. CLEAN THOROUGHLY TO REMOVE ALL OIL, DIRT, AND CHIPS.		TOLERANCES: XX ± 0.015 XXX ± 0.005	SURFACE ROUGHNESS: 63	SYSTEM ADVANCED LIGO	
THIS PRINT & THE EMBEDDED CAD MODEL ARE THE DOCUMENTATION OF RECORD. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN THE MODEL ARE BASIC, WITH TOLERANCES GIVEN BY:		ANGULAR ± 0.5°	SUB-SYSTEM SEI		NEXT ASSY D080456
DRAWN A. STEIN		FINISH NONE		PART NAME HAM STRAIGHT CROSSBEAM TUBE	
CHECKED A. STEIN		NAME A. STEIN		SIZE DWG. NO. D080453	
APPROVED		DATE 06/17/2008		REV. 01	
SCALE: 1:16		PROJECTION:		SHEET 1 OF 1	