
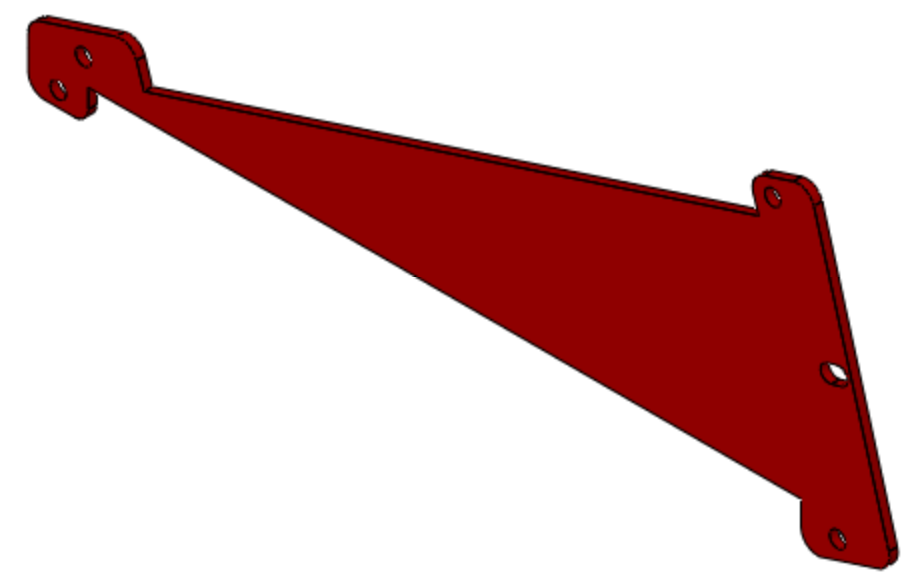


NOTES CONTINUED:  
 ⑤ SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACE FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: DXXXXXX-VY, S/N 001. A VIBRATORY TOOL MAY BE USED.

MIRROR FINISH ONE SIDE AS SHOWN  
 MARK PART NUMBER OPPOSITE MIRROR SIDE

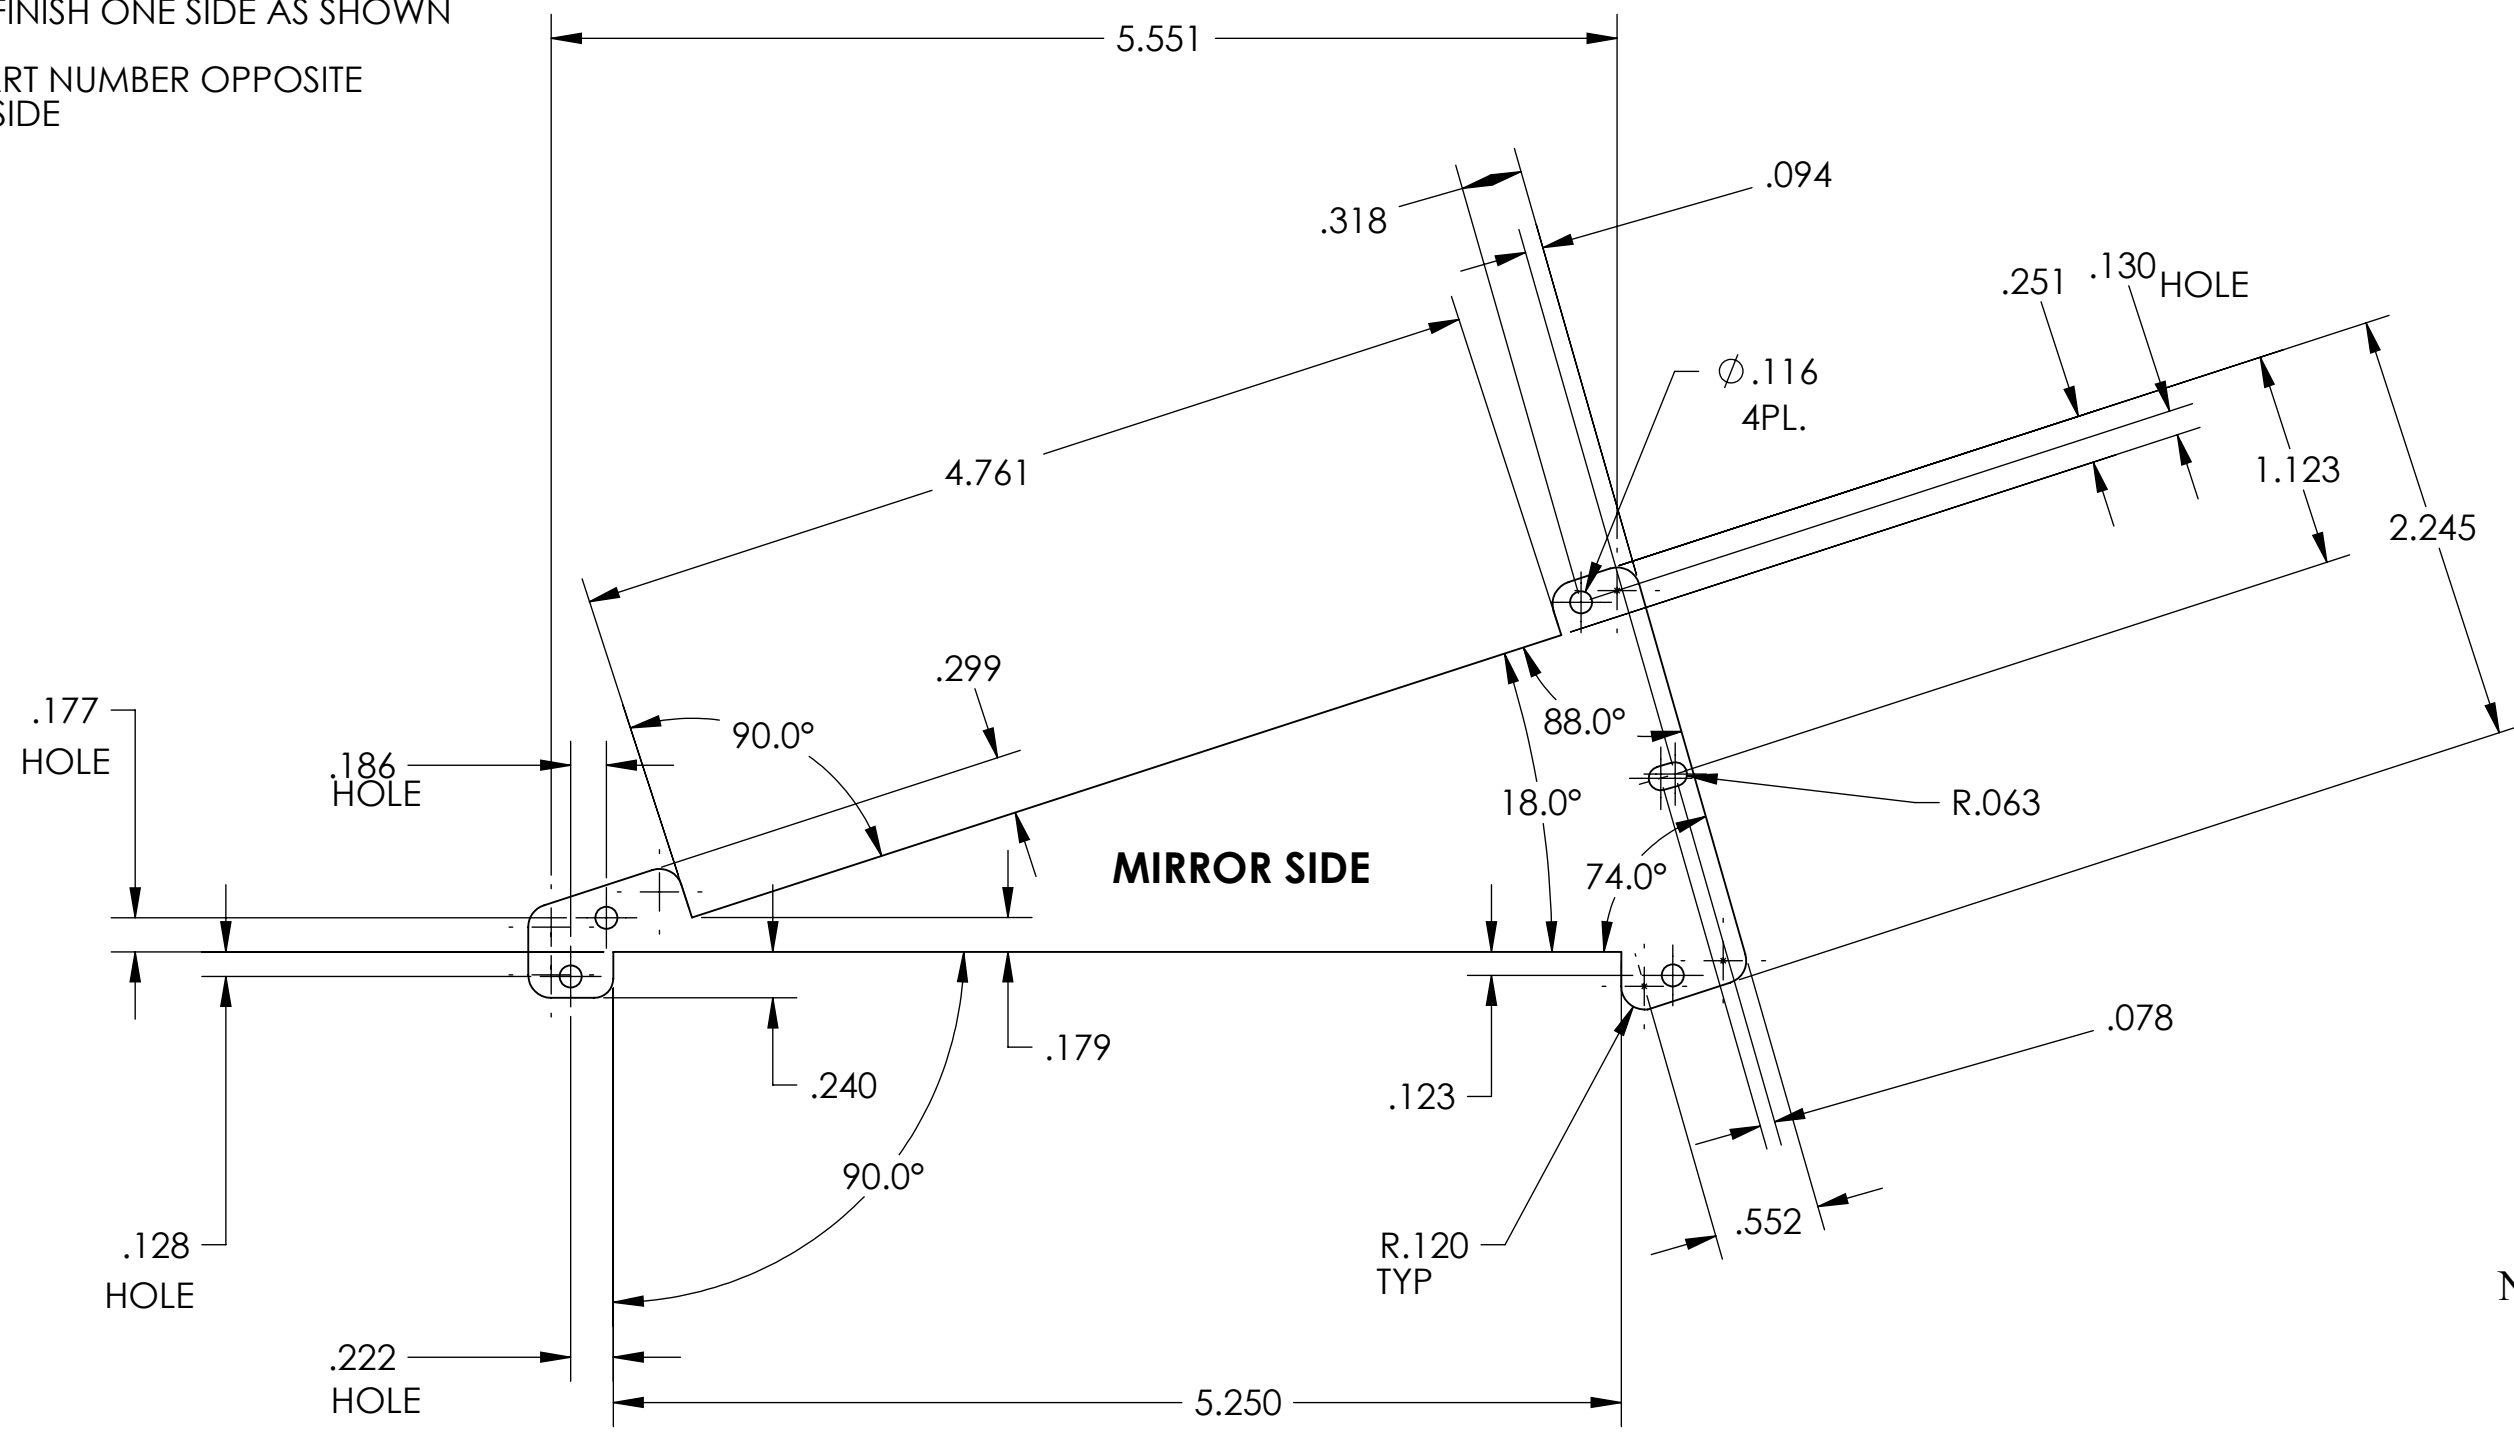

NOTE: FEATURES INPUT TO LASER CUTTING MACHINE THRU DXF FILES. FEATURE TOLERANCES BEST EFFORTS PER MACHINE CUTTING ACCURACY LIMITS

.06 stock 16ga. super mirror one side

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

1. INTERPRET DRAWING PER ASME Y14.5-1994.
2. REMOVE ALL SHARP EDGES, R.02 MIN.
3. DO NOT SCALE FROM DRAWING.
4. ALL MACHINING FLUIDS SHALL BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE AND SILICONE, SUCH AS CINCINNATI MILACRON'S CIMTECH 410.

MATERIAL AISI 304 FINISH N/A μinch

**LIGO** CALIFORNIA INSTITUTE OF TECHNOLOGY  
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

SYSTEM ENHANCED LIGO SUB-SYSTEM AOS

NEXT ASSY D0900177 / D090095

PART NAME		35_W_BEAM_DUMP_TOP_PLATE			
DESIGNER	KMAILAND	04-20-09	SIZE	DWG. NO.	REV.
DRAFTER	KMAILAND	04-20-09	c	D0900326	v1
CHECKER			SCALE: 1:1	PROJECTION:	SHEET 1 OF 1
APPROVAL					