
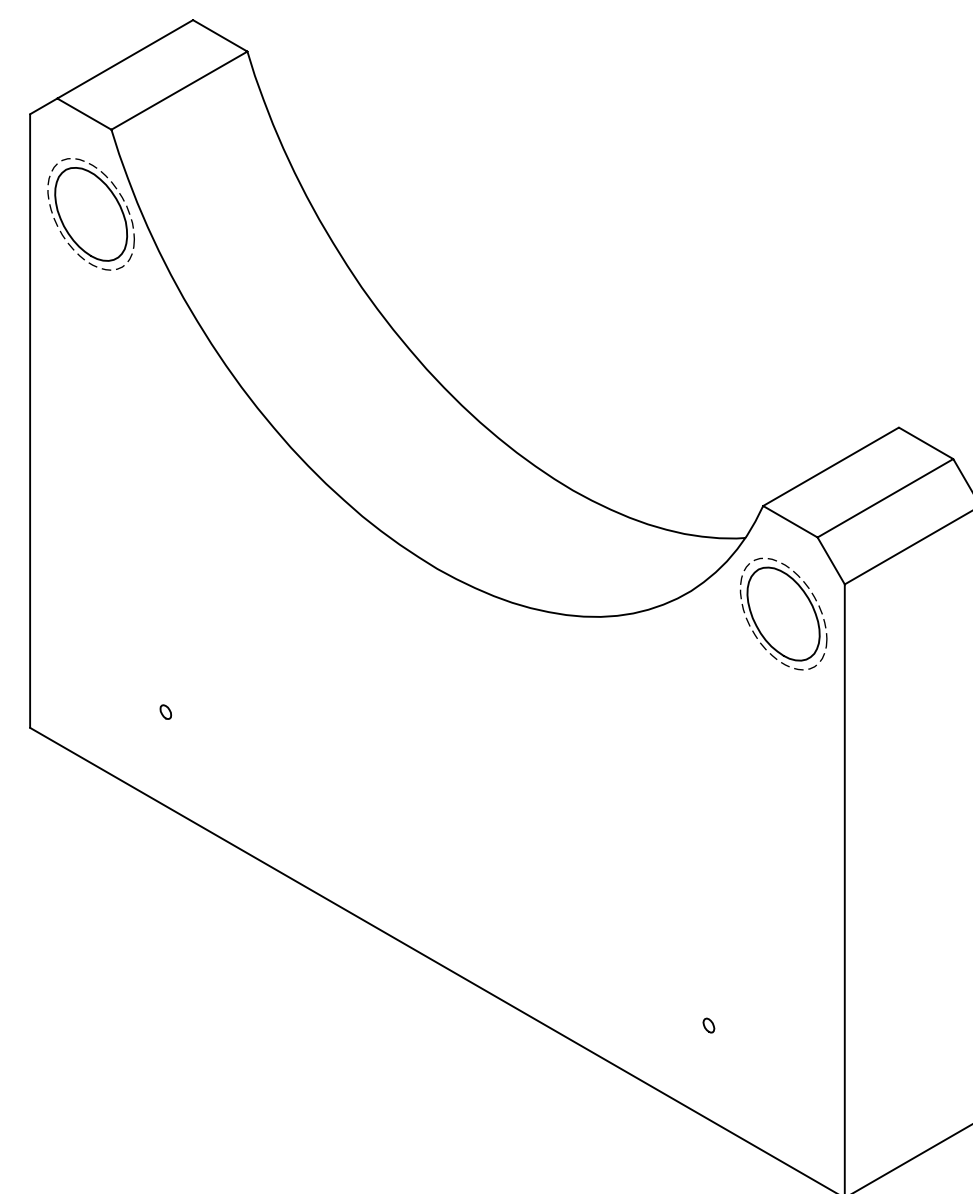




NOTES CONTINUED:

- 5. SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 101 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. A VIBRATORY TOOL MAY BE USED. EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX
- 6. APPROXIMATE WEIGHT = 0.226 LB.
- 7. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH, USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED.
- 8. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.

REV.	DATE	DCN #	DRAWING TREE #
v1	16 JUN 2010	E0900504	E0900353
-	-	-	-
-	-	-	-

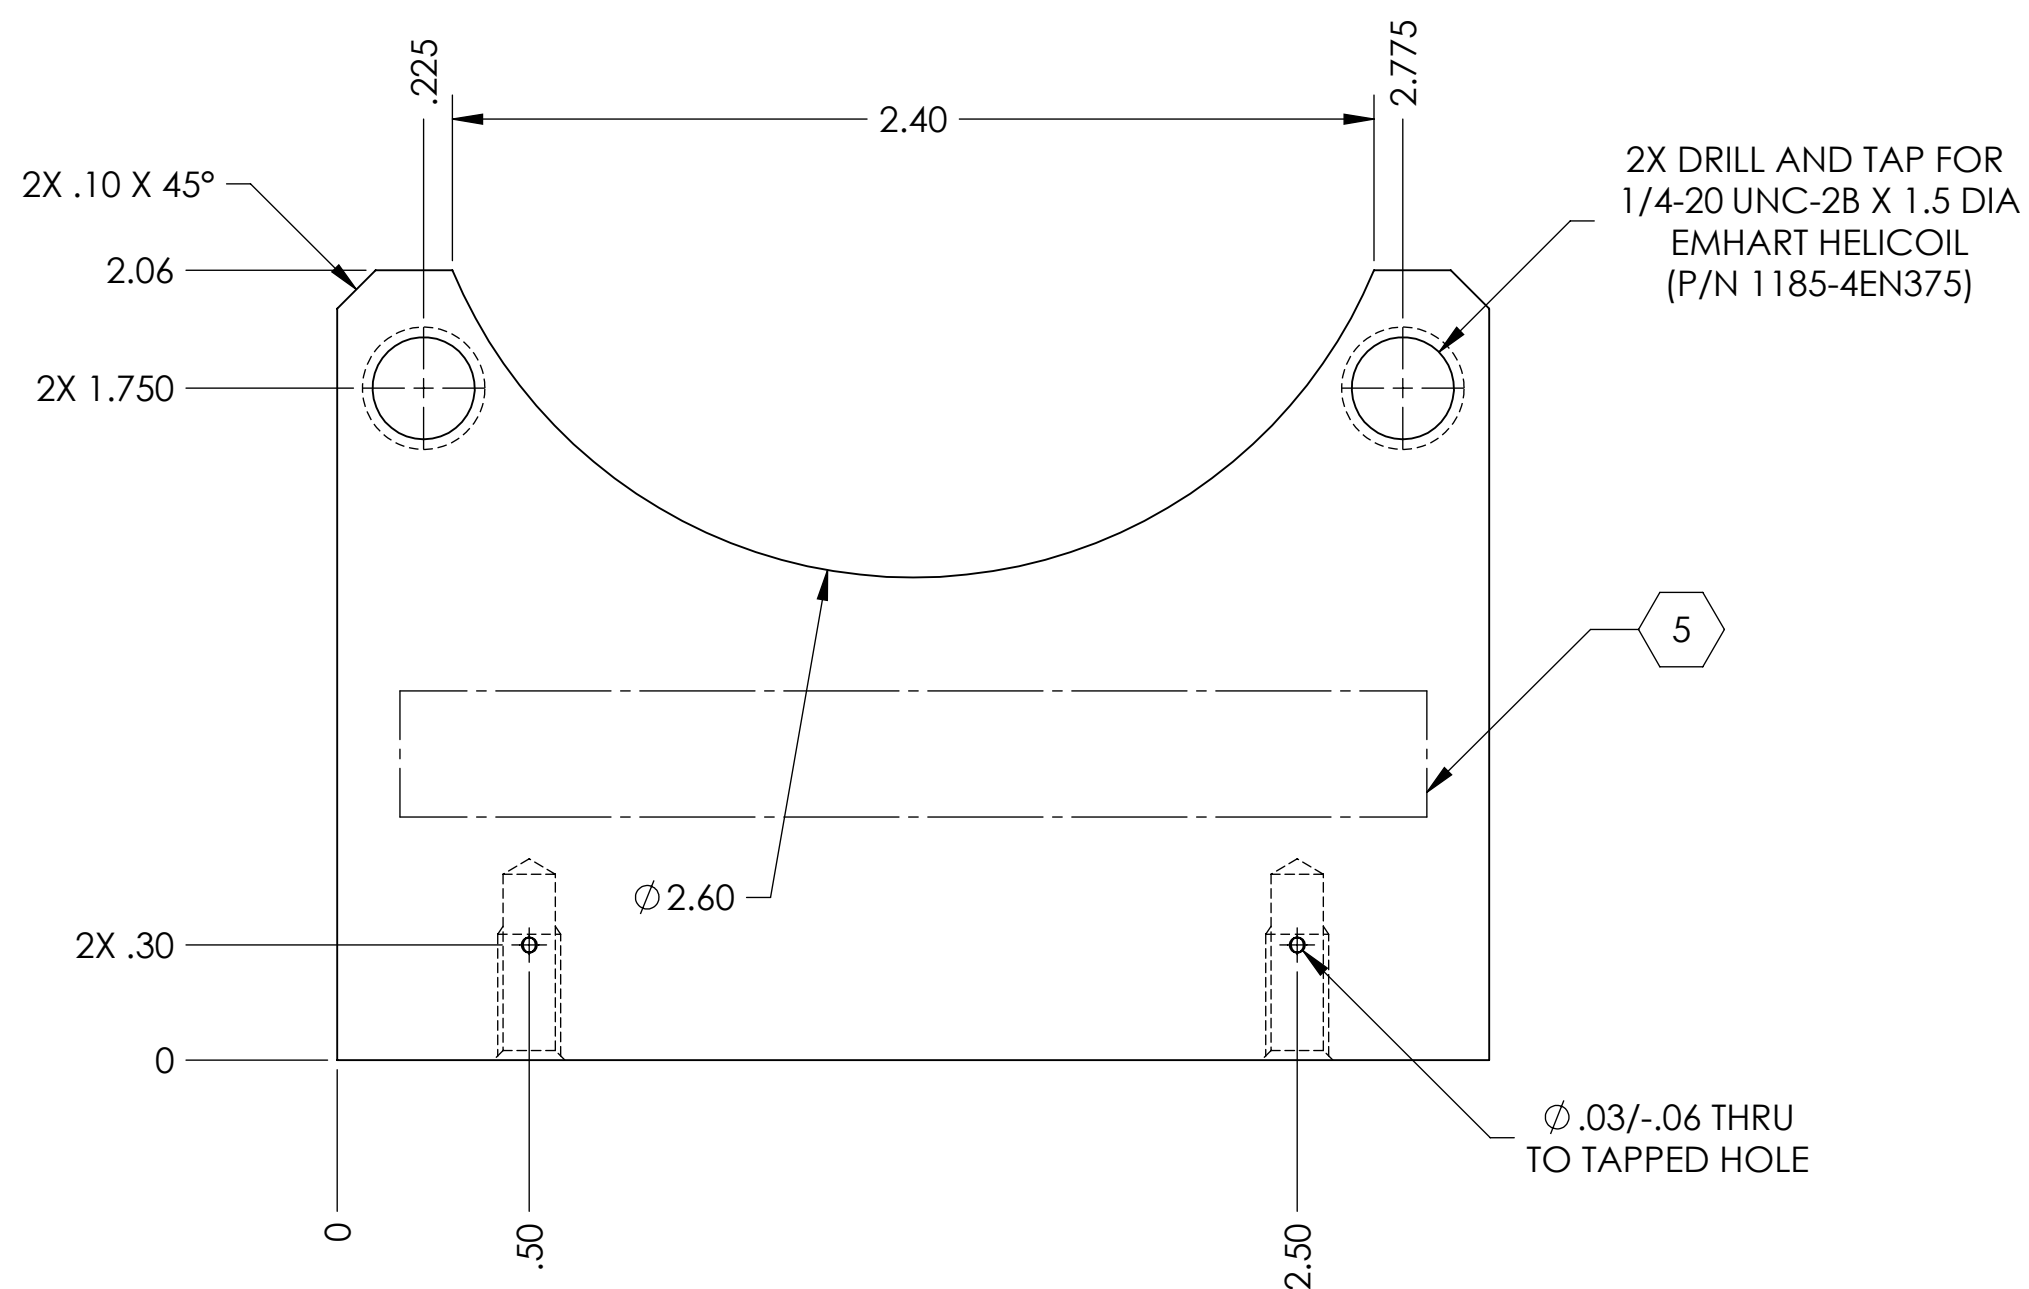

ISOMETRIC VIEW

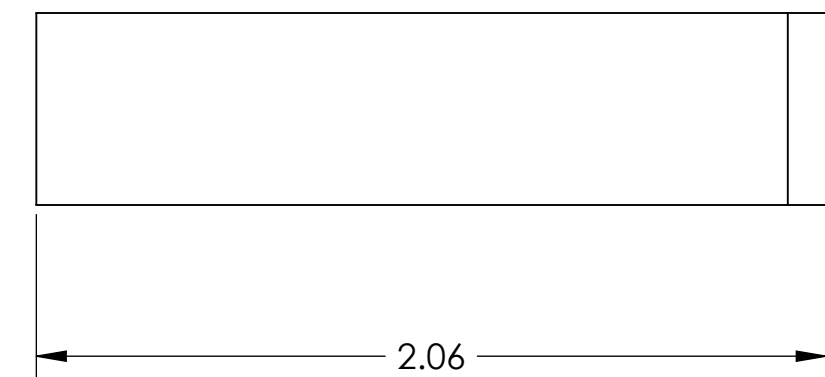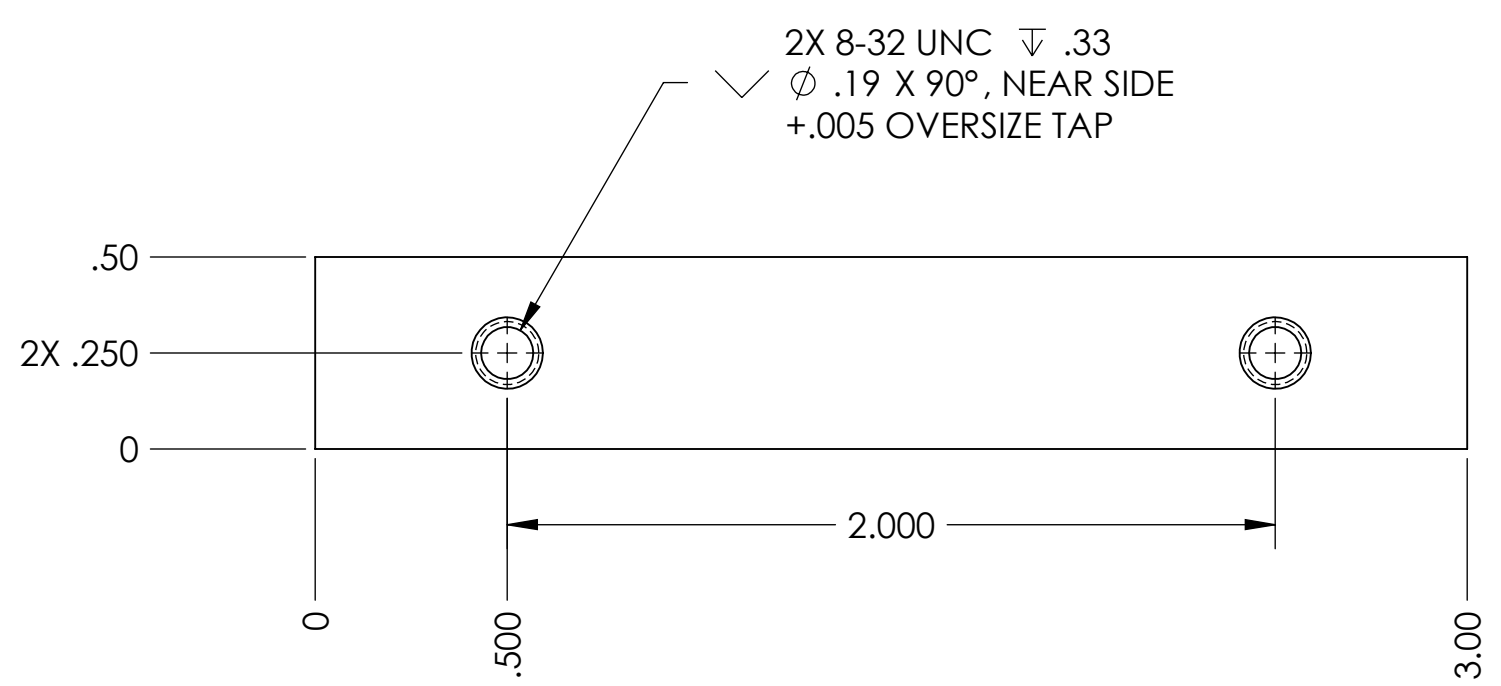

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

- 1. INTERPRET DRAWING PER ASME Y14.5-1994.
- 2. REMOVE ALL SHARP EDGES, R.02 MIN.
- 3. DO NOT SCALE FROM DRAWING.
- 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

<b>MATERIAL</b>	6061-T6 Al	<b>FINISH</b>	32 $\mu$ inch
-----------------	------------	---------------	---------------

**LIGO** CALIFORNIA INSTITUTE OF TECHNOLOGY  
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

<b>SYSTEM</b>	ADVANCED LIGO	<b>SUB-SYSTEM</b>	SUS
<b>NEXT ASSY</b>	D0902205		

<b>PART NAME</b>				<b>FACE EQ STOP BRACKET, HSTS LOWER MASS</b>			
<b>DESIGNER</b>	W. RASCH	10 OCT 2009	<b>SIZE</b>	<b>DWG. NO.</b>	<b>D0901922</b>	<b>REV.</b>	v1
<b>DRAFTER</b>	B. MOORE	18 MAY 2010	<b>c</b>				
<b>CHECKER</b>	M. MEYER	01 JUN 2010					
<b>APPROVAL</b>			<b>SCALE:</b> 2:1	<b>PROJECTION:</b>	SHEET 1 OF 1		