




NOTES CONTINUED:

- 5. SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 101 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. A VIBRATORY TOOL MAY BE USED. EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX
- 6. APPROXIMATE WEIGHT = 0.334 LB.
- 7. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH. USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED.
- 8. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.


REV.	DATE	DCN #	DRAWING TREE #
v1	16 JUN 2010	E0900504	E0900353
-	-	-	-
-	-	-	-

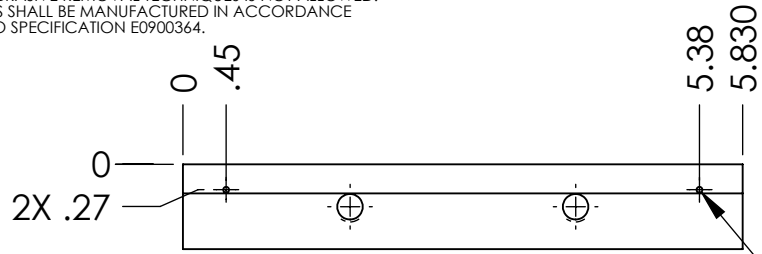


2X ϕ .03/.06 THRU TO TAPPED HOLE

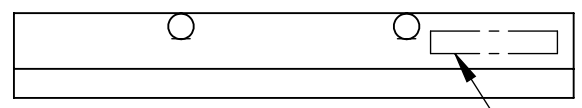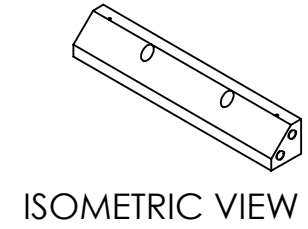

2X 1/4-20 ∇ .50
+.005 OVERSIZE TAP

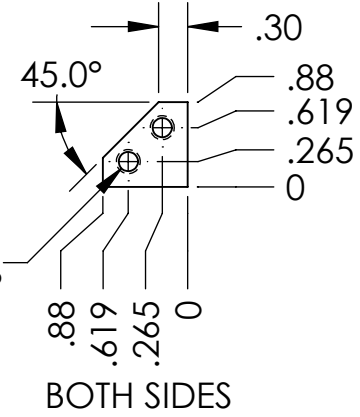

2X DRILL AND TAP FOR 1/4-20 UNC-2B X 2.0 DIA EMHART HELICOIL (P/N 1185-4EN500)

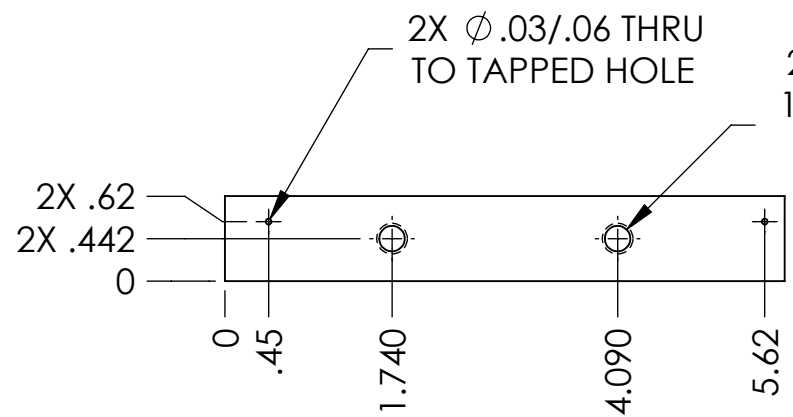

2X ϕ .03/.06 THRU TO TAPPED HOLE

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN INCHES	1. INTERPRET DRAWING PER ASME Y14.5-1994.
TOLERANCES: .XX \pm .01 .XXX \pm .005	2. REMOVE ALL SHARP EDGES, R.02 MIN.
ANGULAR \pm 0.5°	3. DO NOT SCALE FROM DRAWING.
	4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.
MATERIAL	6061-T6 Al
FINISH	32 μ inch

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

SYSTEM: **ADVANCED LIGO** SUB-SYSTEM: **SUS**

NEXT ASSY: **D0902201**

PART NAME: **BARREL EQ STOP CROSSBAR, LOWER WIRE**

DESIGNER	W. RASCH	05 OCT 2009	SIZE	DWG. NO.	REV.
DRAFTER	W. RASCH	23 OCT 2009	A	D0902202	v1
CHECKER	M. MEYER	23 OCT 2009	SCALE: 1:2	PROJECTION:	SHEET 1 OF 1
APPROVAL					