

PACKAGED AIR HANDLING UNIT SCHEDULE

UNIT NO.	LOCATION	SERVICE	TYPE	MIN SP (IN. WG)	FAN			MOTOR			CHILLED WATER COIL											ELECTRIC HEATING COIL				FILTERS				OPER WT (LB)	MANUFACTURER/ MODEL NO.	MIN OUTSIDE AIR CFM	REMARKS								
					TYPE	ACFM	BHP	RPM	HP	VOLTS/ PH/Hz	RPM	TYPE	TOTAL CAPACITY (BTUH)	SENSIBLE CAPACITY (BTUH)	MAX FACE VEL (FPM)	ACFM	MAX AIR PD (IN. WG)	ROWS	MAX FPI	*FDB	*FWB	*FDB	*FWB	EWT (°F)	LWT (°F)	GPM	MAX WTR PD (FT)	HEATING CAPACITY (KW)	NUMBER OF STAGES					VOLTS/ PH/Hz	DUCT SIZE (IN)	TYPE	EFF (%)	QTY	SIZE (IN.)	PD (IN. WG) CLEAN	REPLACE- MENT
L-CS-160-AH-04	OSB	OSB (OFFICES)	DRAW THRU SINGLE ZONE	4.5	CENT	9700	12	1100	15	460/3/60	1750	DP	475	360	445	9700	0.95	8	11	86.5	68.1	52.0	51.8	42	54.3	88	11					TA	65	3	16X25X4 20X20X4	0.35	1.0	900	CARRIER CENTRAL 39L-B-2-21-3	2880	
L-CS-191-AH-05	MAINTENANCE BUILDING	MAINTENANCE BUILDING	DRAW THRU	1.75	CENT	1500	0.8	1500	1.0	460/3/60	1750	DP																			TA	30	2	16X16X2	0.2	0.75	150	CARRIER CENTRAL 39L-B-1-3-4	750		

NOTES:
 1. FOR LEGEND, ABBREVIATIONS AND GENERAL NOTES SEE SHEETS LA-H-001 AND LA-H-002.

CONVECTOR SCHEDULE

UNIT NO.	LOCATION	SERVICE	TYPE	POWER		OPER WT (LB)	MANUFACTURER/ MODEL NO.	REMARKS
				KW	VOLT/PH/Hz			
L-CS-195-HT-01	MAINTENANCE BUILDING	FIRE PUMP ROOM	ELECTRIC	1.5	277/1/60	50	CHROMALOX HCH	
L-CS-195-HT-02	MAINTENANCE BUILDING	FIRE PUMP ROOM	ELECTRIC	1.5	277/1/60	50	CHROMALOX HCH	
L-CS-194-HT-03	MAINTENANCE BUILDING	DOMESTIC PUMP ROOM	ELECTRIC	1.5	277/1/60	50	CHROMALOX HCH	
L-CS-196-HT-04	MAINTENANCE BUILDING	ELECTRIC ROOM	ELECTRIC	1.5	277/1/60	50	CHROMALOX HCH	

AIR FILTER SCHEDULE

UNIT NO.	LOCATION	SERVICE	TYPE	ACFM	EFFICIENCY PERCENT (%)	QTY	SIZE (IN.)	PD (IN. WG)		MANUFACTURER/ MODEL NO.	REMARKS
								CLEAN	REPLACE- MENT		
L-CS-107-AF-01	CORNER STATION	LVEA	TA	33,200	90	24	24X24X12	0.56	1.2	AAF VARICELL X	PRE-FILTER
L-CS-107-AF-02	CORNER STATION	LVEA	TA	33,200	90	24	24X24X12	0.56	1.2	AAF VARICELL X	PRE-FILTER
L-CS-107-AF-03	CORNER STATION	OSB (LAB)	TA	24,000	90	16	24X24X12	0.56	1.2	AAF VARICELL X	PRE-FILTER
L-EA-203-AF-01	END STATION A	END STATION A	TA	13,200	90	8	24X24X12	0.56	1.2	AAF VARICELL X	PRE-FILTER
L-EA-203-AF-02	END STATION A	END STATION A	TA	13,200	90	8	24X24X12	0.56	1.2	AAF VARICELL X	PRE-FILTER
L-EB-203-AF-01	END STATION B	END STATION B	TA	13,200	90	8	24X24X12	0.56	1.2	AAF VARICELL X	PRE-FILTER
L-EB-203-AF-02	END STATION B	END STATION B	TA	13,200	90	8	24X24X12	0.56	1.2	AAF VARICELL X	PRE-FILTER

* IN ACCORDANCE WITH ASHRAE STD 52.1

FAN SCHEDULE

UNIT NO.	LOCATION	SERVICE	TYPE	FAN			MOTOR			OPER WT (LB)	MANUFACTURER/ MODEL NO.	REMARKS			
				ACFM	MIN TSP (IN. WG)	RPM	DRIVE	BHP	HP				VOLTS/ PH/Hz	RPM	TYPE
L-CS-107-SF-01	LVEA	LVEA	VANE AXIAL	16,600	6.0	1770	DIRECT	23.3	30	460/3/60	1770	DP	1800	JOY 29-17-1000-1770	TWO STAGE, 1000 SERIES
L-CS-107-SF-02	LVEA	LVEA	VANE AXIAL	16,600	6.0	1770	DIRECT	23.3	30	460/3/60	1770	DP	1800	JOY 29-17-1000-1770	TWO STAGE, 1000 SERIES
L-CS-107-SF-03	LVEA	LVEA	VANE AXIAL	16,600	6.0	1770	DIRECT	23.3	30	460/3/60	1770	DP	1800	JOY 29-17-1000-1770	TWO STAGE, 1000 SERIES
L-CS-107-SF-04	LVEA	LVEA	VANE AXIAL	16,600	6.0	1770	DIRECT	23.3	30	460/3/60	1770	DP	1800	JOY 29-17-1000-1770	TWO STAGE, 1000 SERIES
L-CS-107-SF-05	LVEA	OSB	VANE AXIAL	12,000	6.5	1770	DIRECT	21.7	25	460/3/60	1770	DP	1800	JOY 29-21-2000-1770	TWO STAGE, 2000 SERIES
L-CS-107-SF-06	LVEA	OSB	VANE AXIAL	12,000	6.5	1770	DIRECT	21.7	25	460/3/60	1770	DP	1800	JOY 29-21-2000-1770	TWO STAGE
L-EA-203-SF-01	END STATION A	END STATION A	VANE AXIAL	13,200	6.0	1770	DIRECT	18.5	25	460/3/60	1770	DP	1800	29-17-1000-1770	TWO STAGE
L-EA-203-SF-02	END STATION A	END STATION A	VANE AXIAL	13,200	6.0	1770	DIRECT	18.5	25	460/3/60	1770	DP	1800	29-17-1000-1770	TWO STAGE STANDBY
L-EB-203-SF-01	END STATION B	END STATION B	VANE AXIAL	13,200	6.0	1770	DIRECT	18.5	25	460/3/60	1770	DP	1800	29-17-1000-1770	TWO STAGE
L-EB-203-SF-02	END STATION B	END STATION B	VANE AXIAL	13,200	6.0	1770	DIRECT	18.5	25	460/3/60	1770	DP	1800	29-17-1000-1770	TWO STAGE STANDBY
L-CS-149-EF-01	OSB	OSB	IN-LINE	950	0.5	1725	DIRECT	--	1/3	120/1/60	1160	DP	82	GREENHECK B50-130-B	
L-CS-137-EF-02	OSB	OSB	IN-LINE	200	0.5	1725	DIRECT	--	1/6	120/1/60	1550	DP	46	GREENHECK B50-90-D	
L-EA-203-EF-01	END STATION A	END STATION A	IN-LINE	80	0.375	1725	DIRECT	--	1/12	120/1/60	1300	DP	25	GREENHECK B50-75-G	
L-EB-203-EF-01	END STATION B	END STATION B	IN-LINE	80	0.375	1725	DIRECT	--	1/12	120/1/60	1300	DP	25	GREENHECK B50-75-G	
L-CS-168-EF-03	OSB	FUME HOOD #1	IN-LINE	800	0.5	1160	DIRECT	0.20	0.25	120/1/60	1160	EP	30	HARTZELL GDVA-18	FIBERGLASS CONSTRUCTION EXPLOSION PROOF MOTOR
L-CS-168-EF-04	OSB	FUME HOOD #2	IN-LINE	800	0.5	1160	DIRECT	0.20	0.25	120/1/60	1160	EP	30	HARTZELL GDVA-18	FIBERGLASS CONSTRUCTION EXPLOSION PROOF MOTOR

AIR COMPRESSOR SCHEDULE

UNIT NO.	LOCATION	SERVICE	TYPE	ACFM	PSIG	MIN TANK CAPACITY (GAL)	HP	VOLTS/ PH/Hz	OPER WT (LB)	MANUFACTURER/ MODEL NO.	REMARKS
L-CS-190-AC-02	CHILLER YARD	CORNER STATION	RECIPROCATING	17	100	120	5	460/3/60	1250	INGERSOL-RAND OLS05	AFTERCOOLER DESICCANT DRYER FOR -40°F DEW POINT, OUTDOOR CONSTRUCTION
L-EA-200-AC-01	CHILLER YARD	END STATION "A"	RECIPROCATING	17	100	120	5	460/3/60	1250	INGERSOL-RAND OLS05	AFTERCOOLER DESICCANT DRYER FOR -40°F DEW POINT, OUTDOOR CONSTRUCTION
L-EA-200-AC-02	CHILLER YARD	END STATION "A"	RECIPROCATING	17	100	120	5	460/3/60	1250	INGERSOL-RAND OLS05	AFTERCOOLER DESICCANT DRYER FOR -40°F DEW POINT, OUTDOOR CONSTRUCTION
L-EB-200-AC-01	CHILLER YARD	END STATION "B"	RECIPROCATING	17	100	120	5	460/3/60	1250	INGERSOL-RAND OLS05	AFTERCOOLER DESICCANT DRYER FOR -40°F DEW POINT, OUTDOOR CONSTRUCTION
L-EB-200-AC-02	CHILLER YARD	END STATION "B"	RECIPROCATING	17	100	120	5	460/3/60	1250	INGERSOL-RAND OLS05	AFTERCOOLER DESICCANT DRYER FOR -40°F DEW POINT, OUTDOOR CONSTRUCTION

GLYCOL FEED PUMP SCHEDULE

UNIT NO.	LOCATION	SERVICE	FLOW RATE (GPM)	PRESSURE RANGE (PSIG)	HP	VOLTS/ PH/Hz	OPERATING WT (LBS)	MANUFACTURER/ MODEL NO.	TANK CAPACITY (GAL)	REMARKS
L-CS-107-GP-01	MECH ROOM	CORNER STATION	1.7	10-70	0.5	110/3/60	1000	WESSELS GMP-2102	100	SELF-CONTAINED CONTROLS
L-EA-203-GP-01	MECH ROOM	END STATION "A"	1.7	10-70	0.5	110/3/60	500	WESSELS GMP-2052	50	SELF-CONTAINED CONTROLS
L-EB-203-GP-01	MECH ROOM	END STATION "B"	1.7	10-70	0.5	110/3/60	500	WESSELS GMP-2052	50	SELF-CONTAINED CONTROLS

CHEMICAL POT FEEDER SCHEDULE




UNIT NO.	LOCATION	MIN SIZE (GAL)	OPER WT (LB)	CONSTRUCTION PRESSURE (PSIG)	MANUFACTURER/ MODEL NO.	REMARKS
L-CS-107-CF-01	CORNER STATION	5	100	125	J.L. WINGERT 5	
L-EA-203-CF-01	END STATION A	5	100	125	J.L. WINGERT 5	
L-EB-203-CF-01	END STATION B	5	100	125	J.L. WINGERT 5	

CHILLED WATER CIRCULATING PUMP SCHEDULE

UNIT NO.	LOCATION	SERVICE	TYPE	FLUID PUMPED	MAX FLUID TEMP (°F)	GPM	TOTAL HEAD (FT)	NPSH (FT)	BHP	MOTOR			OPER WT (LB)	MANUFACTURER/ MODEL NO.	REMARKS	
										HP	VOLTS/ PH/Hz	RPM				TYPE
L-CS-190-WP-01	CORNER STN	CORNER STN	CENTRIFUGAL	40% GLYCOL	60	367	125	10	17	20	460/3/60	3500	CENT	650	PACO, TYPE L 2570-7 (24 X3X7)	25% GLYCOL
L-CS-190-WP-02	CORNER STN	CORNER STN	CENTRIFUGAL	40% GLYCOL	60	367	125	10	17	20	460/3/60	3500	CENT	650	PACO, TYPE L 2570-7 (24 X3X7)	25% GLYCOL
L-CS-190-WP-03	CORNER STN	CORNER STN	CENTRIFUGAL	40% GLYCOL	60	367	125	10	17	20	460/3/60	3500	CENT	650	PACO, TYPE L 2570-7 (24 X3X7)	25% GLYCOL (STANDBY)
L-EA-200-WP-01	END STN A	END STN A	CENTRIFUGAL	40% GLYCOL	60	105	120	6	5	7 1/2	460/3/60	3500	CENT	400	PACO, TYPE L 1270-7 (14 X15 X7)	25% GLYCOL
L-EA-200-WP-02	END STN A	END STN A	CENTRIFUGAL	40% GLYCOL	60	105	120	6	5	7 1/2	460/3/60	3500	CENT	400	PACO, TYPE L 1270-7 (14 X15 X7)	25% GLYCOL (STANDBY)
L-EB-200-WP-01	END STN B	END STN B	CENTRIFUGAL	40% GLYCOL	60	105	120	6	5	7 1/2	460/3/60	3500	CENT	400	PACO, TYPE L 1270-7 (14 X15 X7)	25% GLYCOL
L-EB-200-WP-02	END STN B	END STN B	CENTRIFUGAL	40% GLYCOL	60	105	120	6	5	7 1/2	460/3/60	3500	CENT	400	PACO, TYPE L 1270-7 (14 X15 X7)	25% GLYCOL (STANDBY)

This document and the design it covers are the property of PARSONS. They are loaned only with the borrower's expressed written agreement that they will not be reproduced, copied, loaned, exhibited, or used in any other way, except by written consent from PARSONS to the borrower.

ISSUED FOR CONSTRUCTION
 DRAWN CLP 11-15-96
 CHECKED TFE 12-25-96
 ENGINEER AA 12-23-96
 PROJ SDB 11/15/96

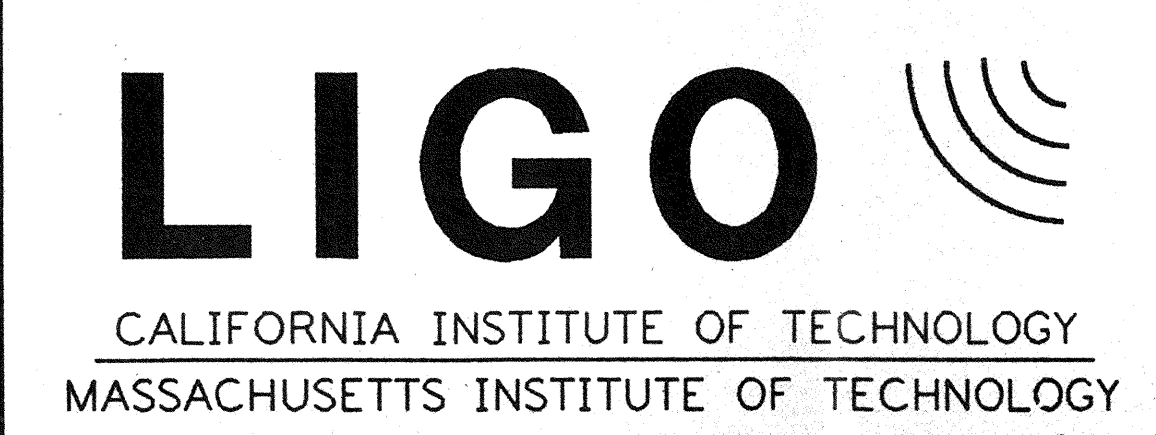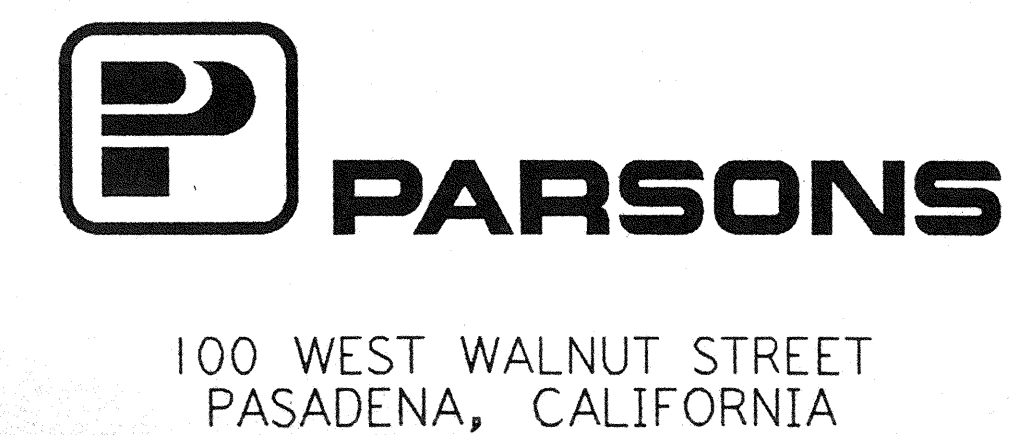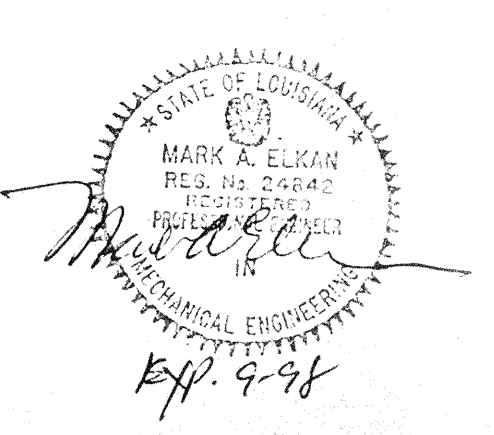

LASER INTERFEROMETER GRAVITATIONAL-WAVE OBSERVATORY SITE NO.2 - LIVINGSTON, LOUISIANA

TITLE: HVAC EQUIPMENT SCHEDULES SHEET 2

SCALE: NONE CONTRACT NUMBER: PPI50969 PROJECT NUMBER: 8094

SHEET NUMBER: LA-H-004