

4

3


2

1

NOTES CONTINUED:

- Ⓢ BAG ALL ITEMS AND MARK OR TAG EACH BAG WITH DRAWING NUMBER, REVISION, AND QUANTITY. EXAMPLE: DXXXXXX-VY, QTY: TBD
- 6. PART IS TO BE MADE FROM STOCK SOCKET HEAD CAP SCREW, #2-56 UNC-2A, FULLY THREADED.

REV.	DATE	DCN #	DRAWING TREE #
A	12 AUG 2008	E080415	-
v1	22 OCT 2009	E0900369	-
-	-	-	-

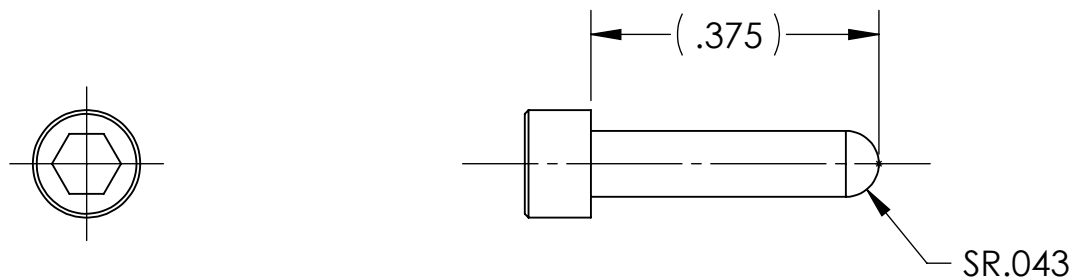

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN INCHES

TOLERANCES:
.XX ± .01
.XXX ± .005

ANGULAR ± 0.5°

- 1. INTERPRET DRAWING PER ASME Y14.5-1994.
- 2. REMOVE ALL SHARP EDGES, R.02 MIN.
- 3. DO NOT SCALE FROM DRAWING.
- 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

MATERIAL: 300 SSSL
FINISH: N/A μinch

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

SYSTEM: ADVANCED LIGO
SUB-SYSTEM:
NEXT ASSY: MULTIPLE ASSYS

PART NAME: SCREW, SOCKET HEAD CAP, #2-56 UNC-2A X 0.375 LONG, FULLY THREADED, ROUNDED END

DESIGNER		SIZE	DWG. NO.	REV.
DRAFTER	D. BRIDGES	18 NOV 2009	A	D080468
CHECKER	M. MEYER	19 NOV 2009		v1
APPROVAL		SCALE: 4:1	PROJECTION:	SHEET 1 OF 1

4

3

2

1