
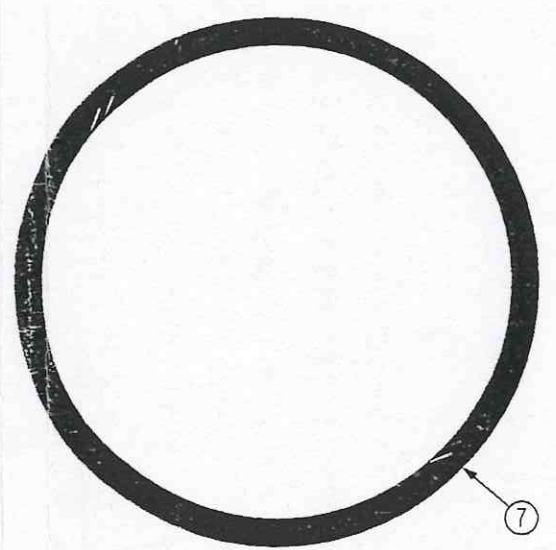
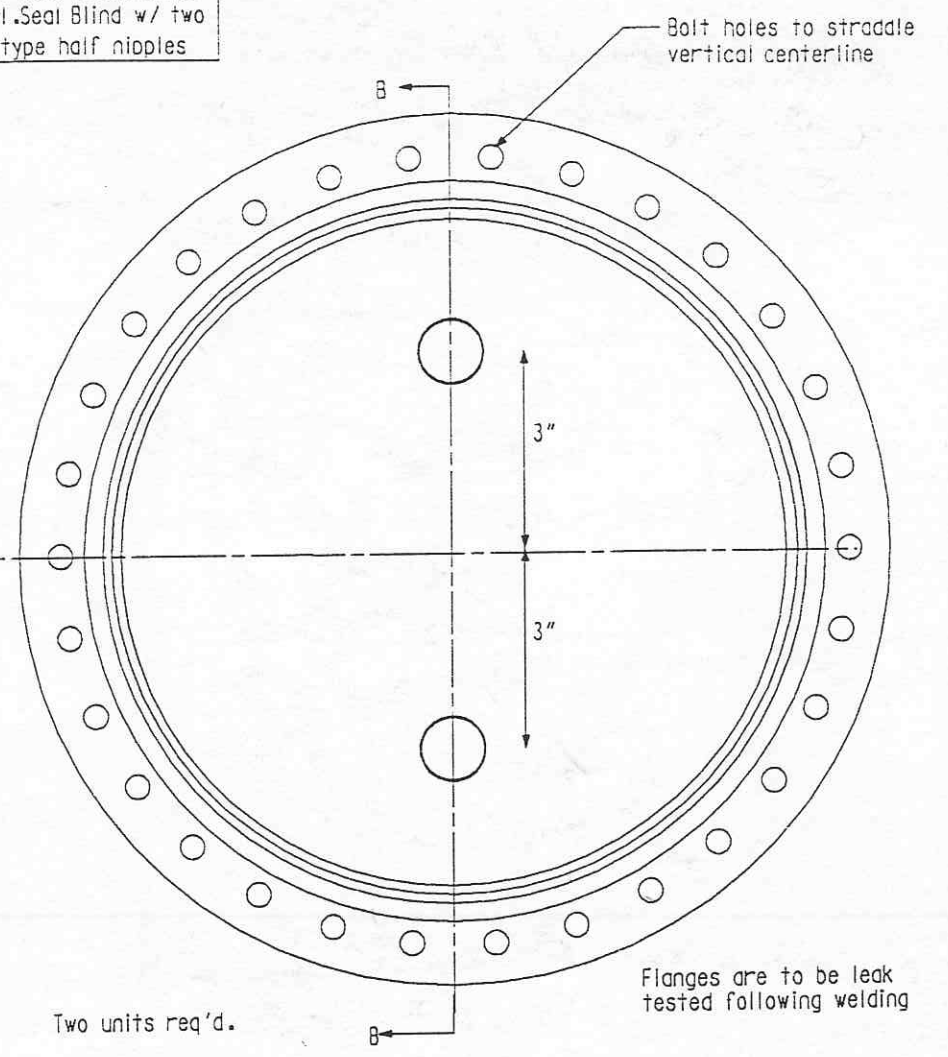


Pump Port Leak Check Blind
 13.25" Del. Seal Blind w/ two
 ISO NW25 type half nipples

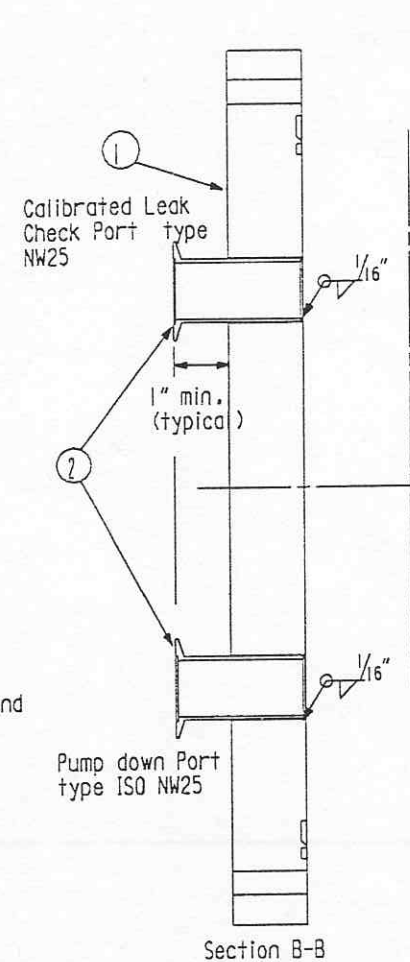

Pump Port Leak Test "O" Ring
 Hot Vulcanized 9.75" O.D. +0, -.06,
 8.75" I.D. (Buna-N 50 durometer)
 (20 pcs. req'd.)

"O" Ring Cross-Section 1/2" dia.

INDICATES CHANGE FROM PREVIOUS ISSUE

Supplier's/Purchaser's No.		Contract No.	
CBI LIGO-D970058-00-B		953571	
LIGO-BEAM TUBE HANFORD, WA & LIVINGSTON, LA			
TUBE SECTION LEAK TEST PUMP PORT LEAK TEST FIXTURE			
Customer's No.		Contract No.	
By CLD chkd <i>[Signature]</i> Date 6-6-96		953571	
M. L. TELLALIAN Engineering Supervisor		Dwg. ER605	Rev. 8
Sheet		8	
THIS DRAWING HAS BEEN PREPARED FOR AND IS THE PROPERTY OF CBI AND IS TO BE USED ONLY IN CONNECTION WITH PERFORMANCE OF WORK BY CBI. REPRODUCTION IN WHOLE OR IN PART FOR ANY OTHER PURPOSE IS EXPRESSLY FORBIDDEN.			
Revisions		FORM CBI 314 REV SEP 93	
By	Chkd	By	Chkd
Date	Date	Date	Date