

8 7 6 5 4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ADDED HOLE DIM, CHANGED TOLERANCES	3-16-98	WKM

D


D

C

C

B

B

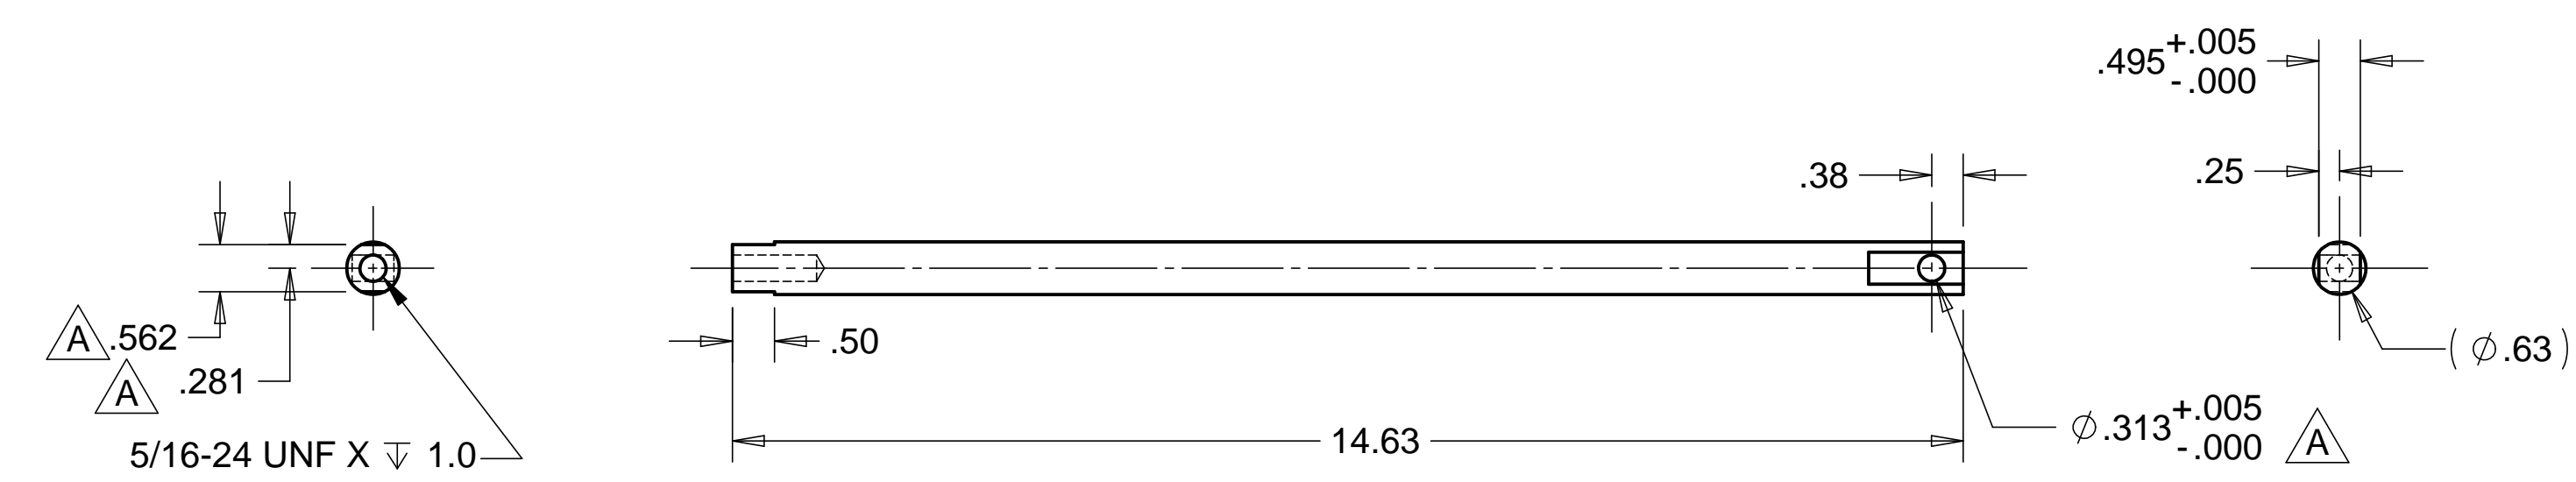

MATL: ϕ .625 303 SSSL BARSTOCK

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
2. DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994
3. SURFACE TEXTURE PER ANSI/ASME B 46.1-1985
4. REMOVE ALL BURRS AND BREAK SHARP EDGES TO A MAXIMUM OF .015
5. ALL INSIDE CORNERS TO BE .015 RADIUS MAX
6. COUNTERSINK 82 DEGREES ALL TAPPED HOLES TO MAJOR DIAMETER
7. COUNTERSINK 82 DEGREES APPROXIMATELY .015 DEEP ALL DRILLED HOLES
8. PARTS TO BE THOROUGHLY CLEANED TO REMOVE ALL OIL, GREASE, DIRT AND CHIPS
9. PART NUMBER (DRAWING NO. PLUS DASH NO. PLUS SERIAL NO.) TO BE CLEARLY MARKED ON THE PART ITSELF.
10. PART WEIGHS 1.2 Lbs.

A

A

PARTS LIST			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES -TOLERANCES-	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE DO NOT SCALE DRAWING		HYTEC, INC
	DECIMALS .XX = +/- .06 .XXX = +/- .010		TITLE BSC RAIL SYSTEM TROLLEY LINK #2
FINISH	SIGNATURE	DATE	DWG. NO.
	DESIGNED W. K. MILLER	1/18/98	SIZE
	DRAWN W. K. MILLER	1/18/98	SHEET NO.
	CHECKED HARRY SALAZAR	2/5/98	D972432
	ENGR. T. THOMPSON	2/5/98	D 1 of 1
PART NO. D972432-1	APPROVED T. THOMPSON	2/5/98	SCALE 1/2
			REVISION A

8 7 6 5 4 3 2 1