

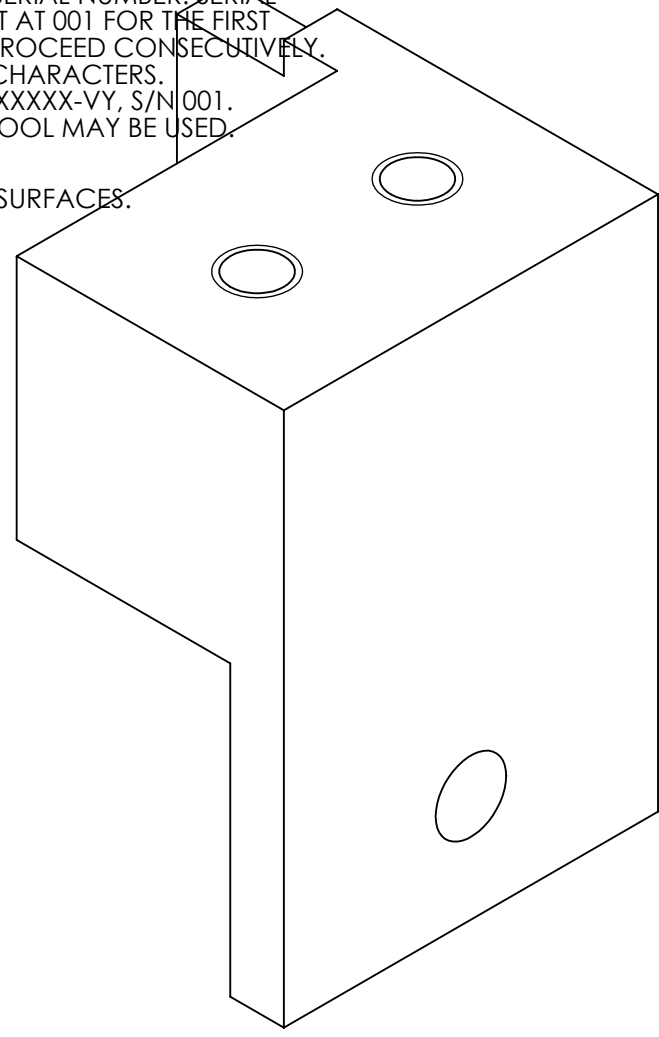
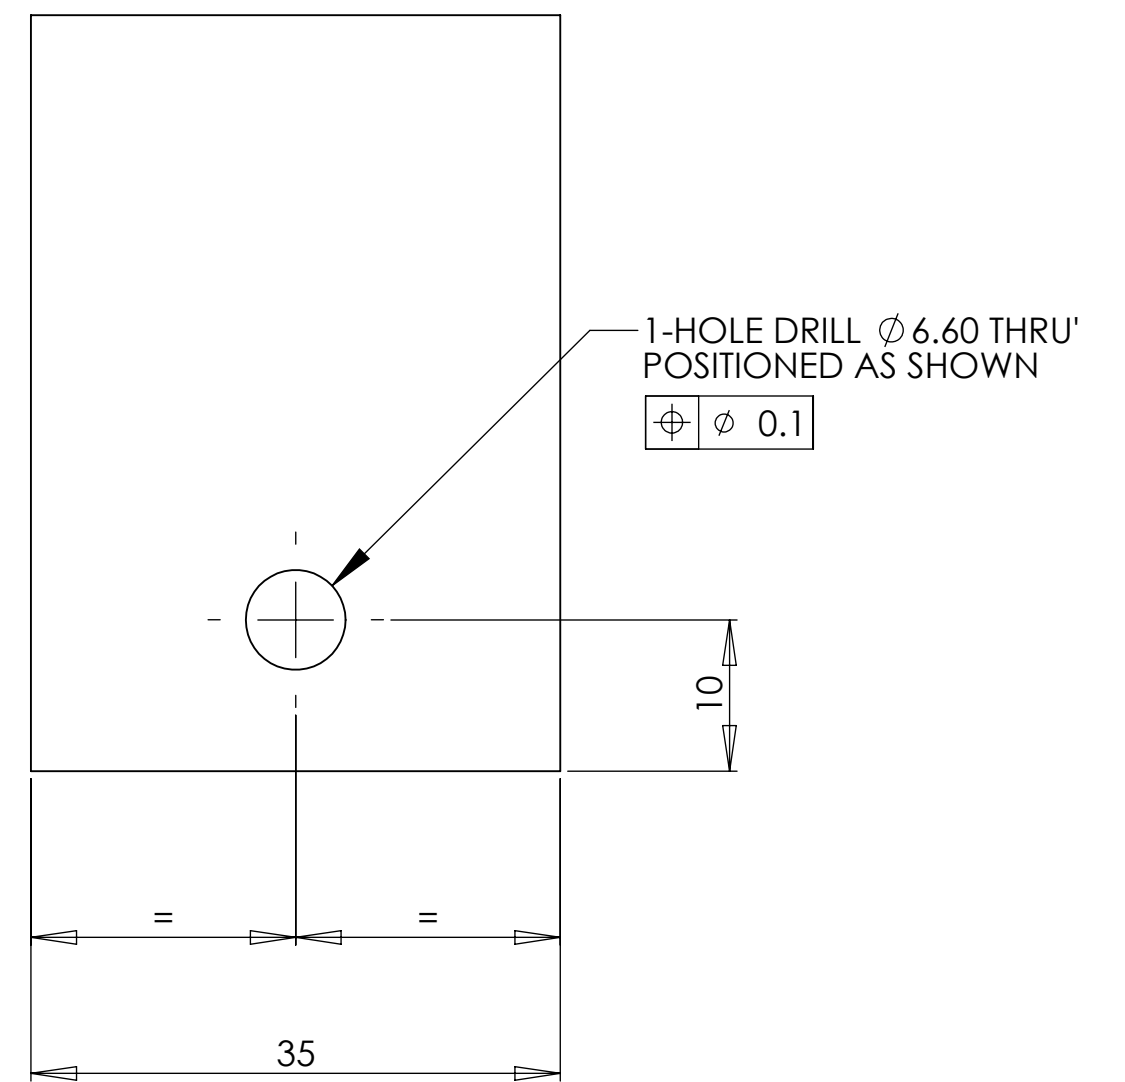


NOTES CONTINUED:
 5. SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACE FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: DXXXXXX-VY, S/N 001. A VIBRATORY TOOL MAY BE USED.

6. MACHINE ALL SURFACES.

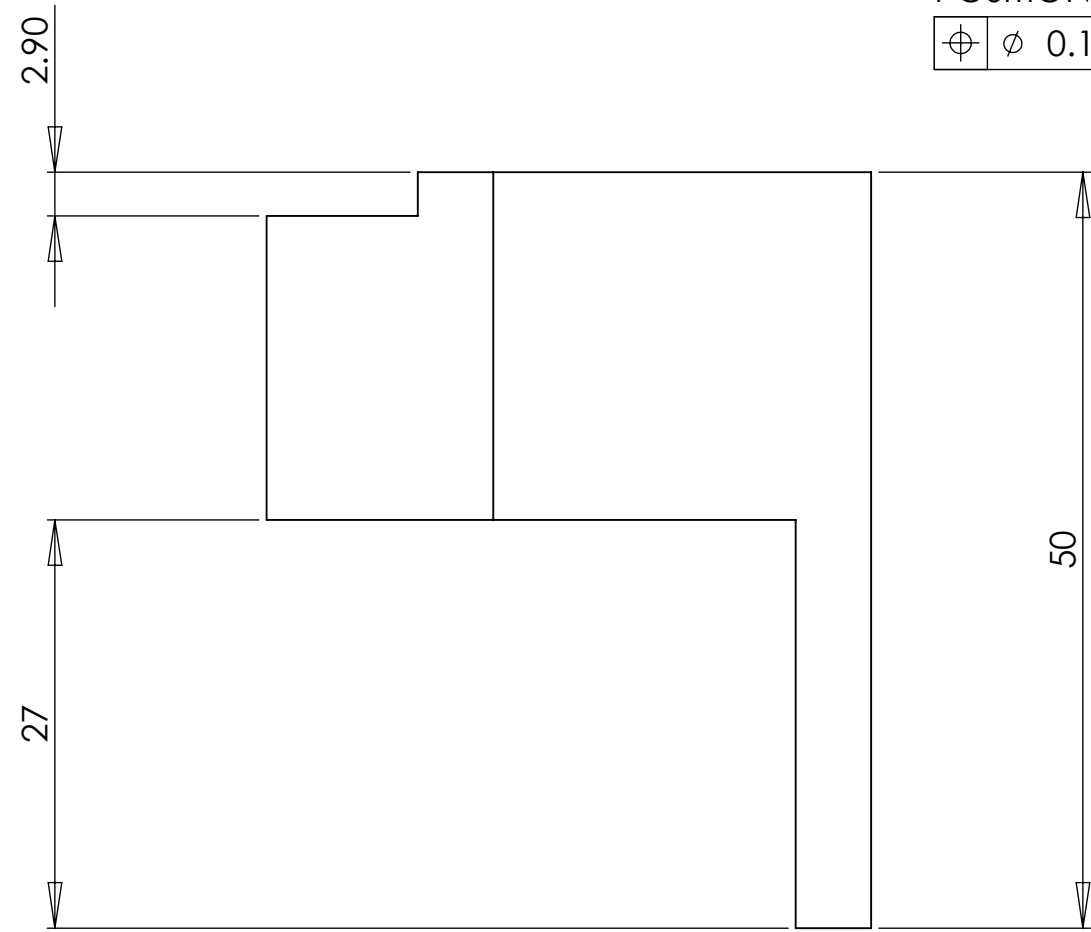

ISOMETRIC VIEW

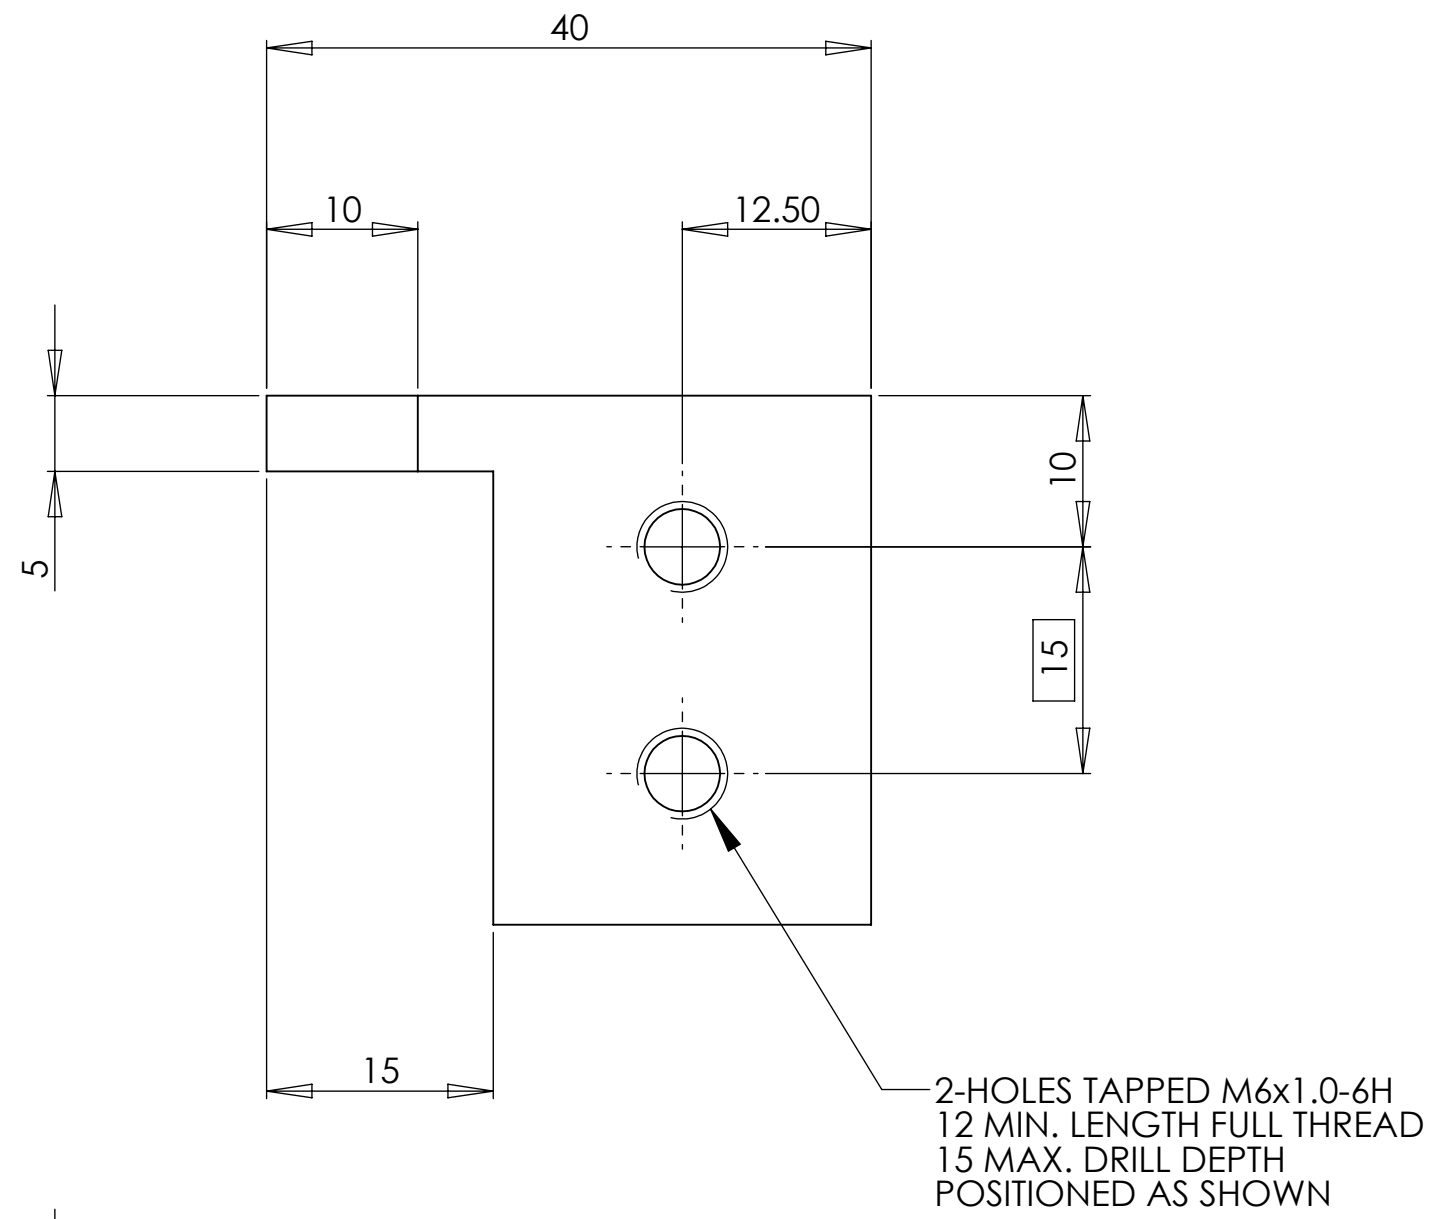

REV.	DATE	DCN #	DRAWING TREE #

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:
 .XX ± .10
 .XXX ± .010

ANGULAR ± 0.2°

1. INTERPRET DRAWING PER ASME Y14.5-1994.
2. REMOVE ALL SHARP EDGES, R.02 MIN.
3. DO NOT SCALE FROM DRAWING.
4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

MATERIAL: 6061-T6 Al

FINISH: 1.6 µm



SYSTEM: ADVANCED LIGO SUB-SYSTEM: SUS

NEXT ASSY

PART NAME: FIBRE CUTTER SLIDER BLOCK LOWER SIDE 2

DESIGNER: K.McINTYRE 12/01/2010 SIZE: c DWG. NO.: D1000359 REV.: v1

CHECKER: APPROVAL: SCALE: 2:1 PROJECTION: SHEET 1 OF 1