

Serial Number: _____

Date: _____

Tech: _____

LASER INTERFEROMETER GRAVITATIONAL WAVE OBSERVATORY

-LIGO-

CALIFORNIA INSTITUTE OF TECHNOLOGY

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

Document Type	DCC Number	July 18, 2002
	T020095-A-C	
Universal Dewhitening Board (Rev B4) Test Plan		
J. Heefner		

Distribution of this draft:
This is an internal working note of the LIGO Laboratory

California Institute of Technology
LIGO Project – MS 18-33
Pasadena, CA 91125
Phone (626) 395-2129
Fax (626) 304-9834
E-mail: info@ligo.caltech.edu

Massachusetts Institute of Technology
LIGO Project – MS 20B-145
Cambridge, MA 01239
Phone (617) 253-4824
Fax (617) 253-7014
E-mail: info@ligo.mit.edu

www: <http://www.ligo.caltech.edu/>

Serial Number: _____

Date: _____

Tech: _____

1 Introduction

The tests described below are required to verify the correct operation of the Universal Dewhitening Board Rev B4, (D000183, Rev B4).

2 Test Equipment

Dynamic Signal Analyzer
 Oscilloscope
 Power supplies

3 Tests

3.1 Input Power

Record the input voltage and current in the table below. Values should be +/-20mA of the nominal values.

Supply	Nominal Current	Actual	Pass/Fail
+15 V	0.16 A		
-15 V	0.16 A		

3.2 Filter Response

The nominal response of each section of each channel, when the filter is engaged, has 2 poles at 15 Hz and two zeros at 75 Hz. In addition the final stage has a pole at 0.1 Hz and a zero at 5 Hz. Using the dynamic signal analyzer, verify and record the response of each section of each channel in the table below. Channels are considered to be responding correctly if the magnitude and phase are within 1dB and 5 degrees, respectively of the nominal values. A plot of the nominal response is included at the end of this test plan.

Channel/ Section	Jumpers	Filter Enable	Gain/Phase at 1Hz Nom -10.4dB/ 103deg	Gain/Phase at 50Hz Nom -44.8dB/ 79deg	Gain/Phase at 1KHz Nom -53dB/ 175deg
1/1	Jb1, 1-2 Jb2, 2-3 Jb3, 2-3	P1-1A ground			
1/2	Jb1, 2-3 Jb2, 1-2 Jb3, 2-3	P1-1A ground			
2/1	Jb4, 1-2 Jb5, 2-3 Jb6, 2-3	P1-2A ground			
2/2	Jb4, 2-3 Jb5, 1-2 Jb6, 2-3	P1-2A ground			
3/1	Jb7, 1-2 Jb8, 2-3 Jb9, 2-3	P1-3A ground			
3/2	Jb7, 2-3 Jb8, 1-2 Jb9, 2-3	P1-3A ground			
4/1	Jb10, 1-2 Jb11, 2-3 Jb12, 2-3	P1-4A ground			

Serial Number: _____

Date: _____


Tech: _____

4/2	Jb10, 2-3 Jb11, 1-2 Jb12, 2-3	P1-4A ground			
-----	-------------------------------------	--------------	--	--	--

3.3 Bypass Enable/Disable

The nominal response of each channel, when the filter is bypassed, is a flat response (gain=9.6dB) from DC to freq>10KHz. Using the dynamic signal analyzer verify that the response of each channel is flat to 10KHz.

Channel	Bypass enable	Response flat?
1	P1-1A open	
2	P1-2A open	
3	P1-3A open	
4	P1-4A open	

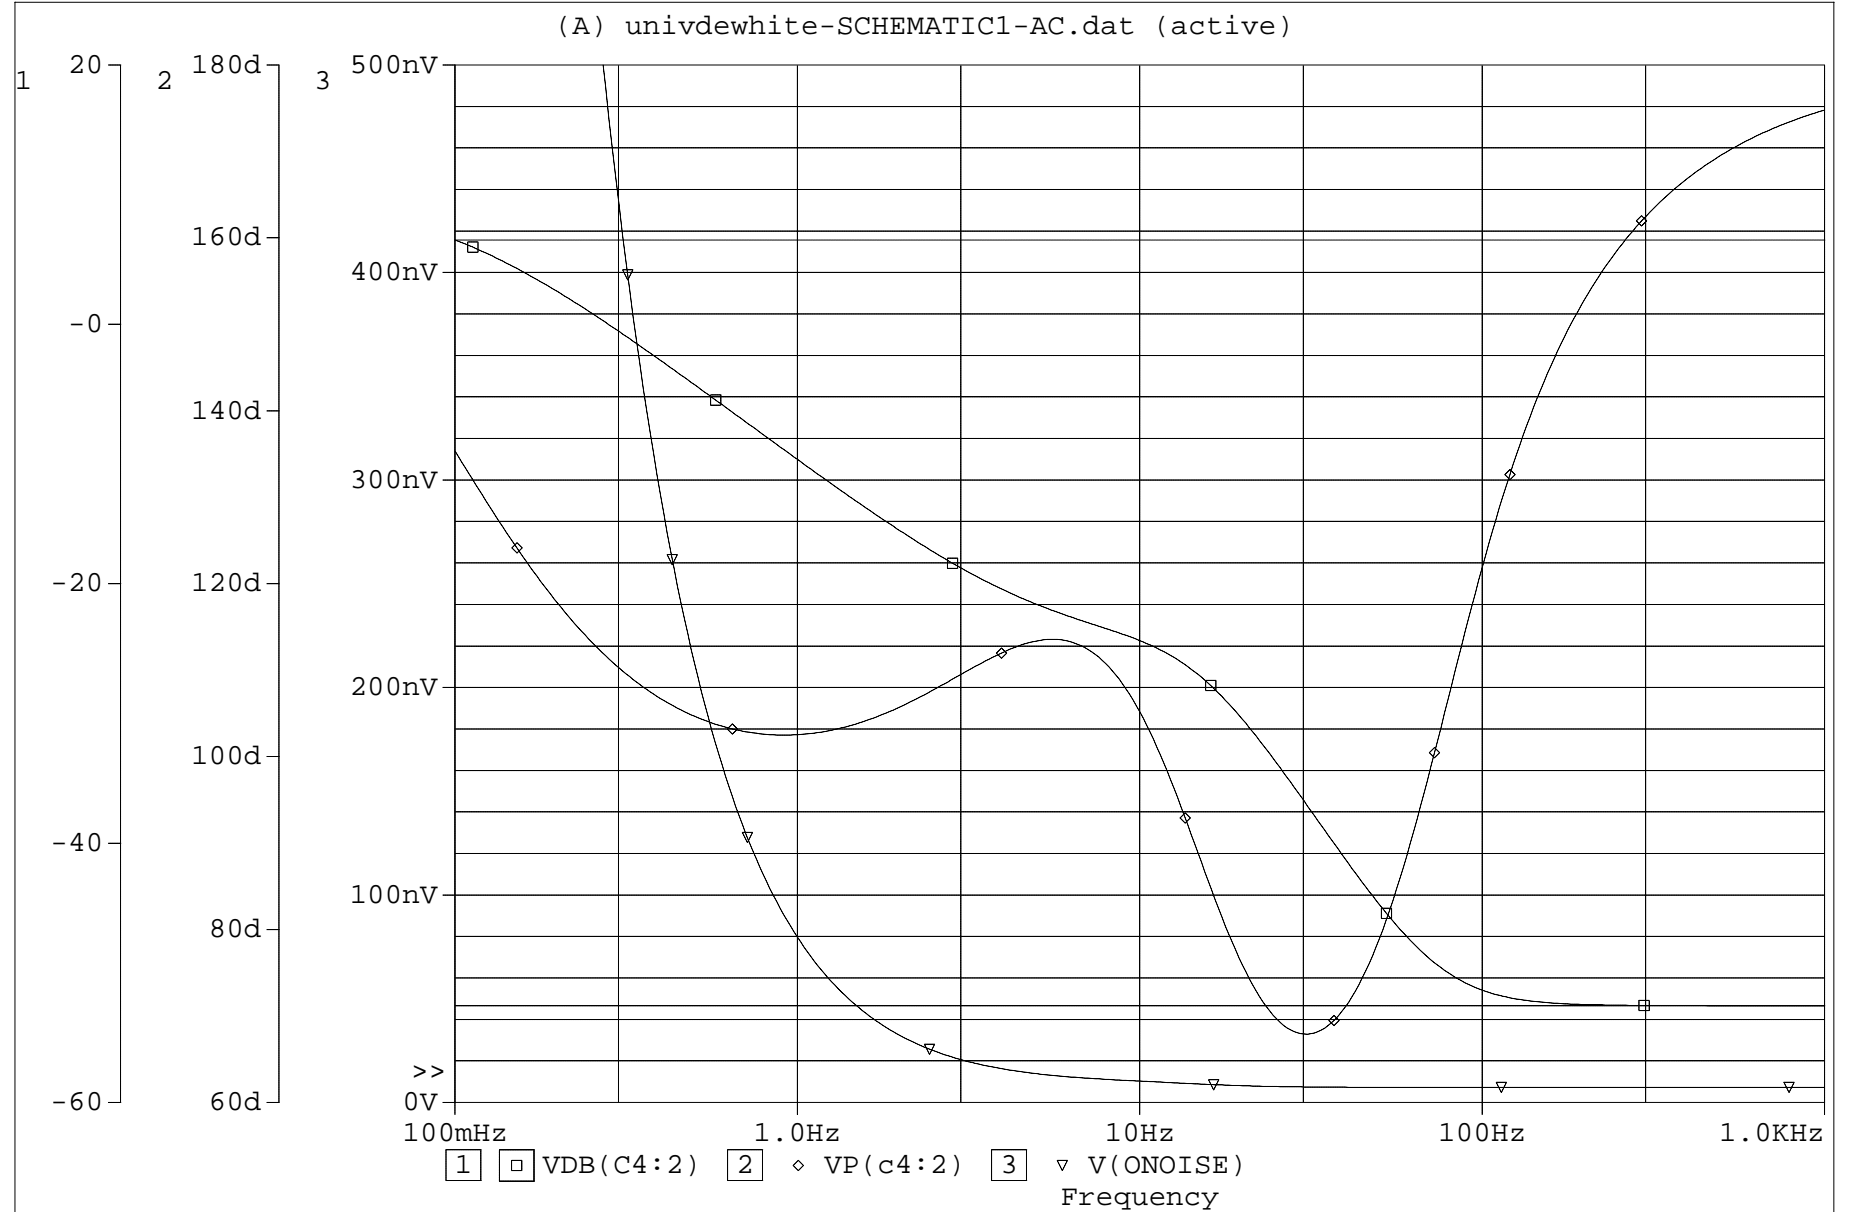

A1:(1.0000K,-52.539) A2:(100.000m,6.5079) DIFF(A):(0.9999K,-59.047)