


D1001962_d1lGO_AOs_Wedge Window Middle Support Output Baffle, PART PDM REV: X-009, DRAWING PDM REV: X-008

NOTES CONTINUED:
 5. SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. A VIBRATORY TOOL MAY BE USED.
 EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX


6. APPROXIMATE WEIGHT = 0.029 LB.
 7. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH. USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED.
 8. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.

REV.	DATE	DCN #	DRAWING TREE #
v1	7 OCT 2010	E1000563	E1000531
v2	28 FEB 2011	E1000563	E1000531
-	-	-	-

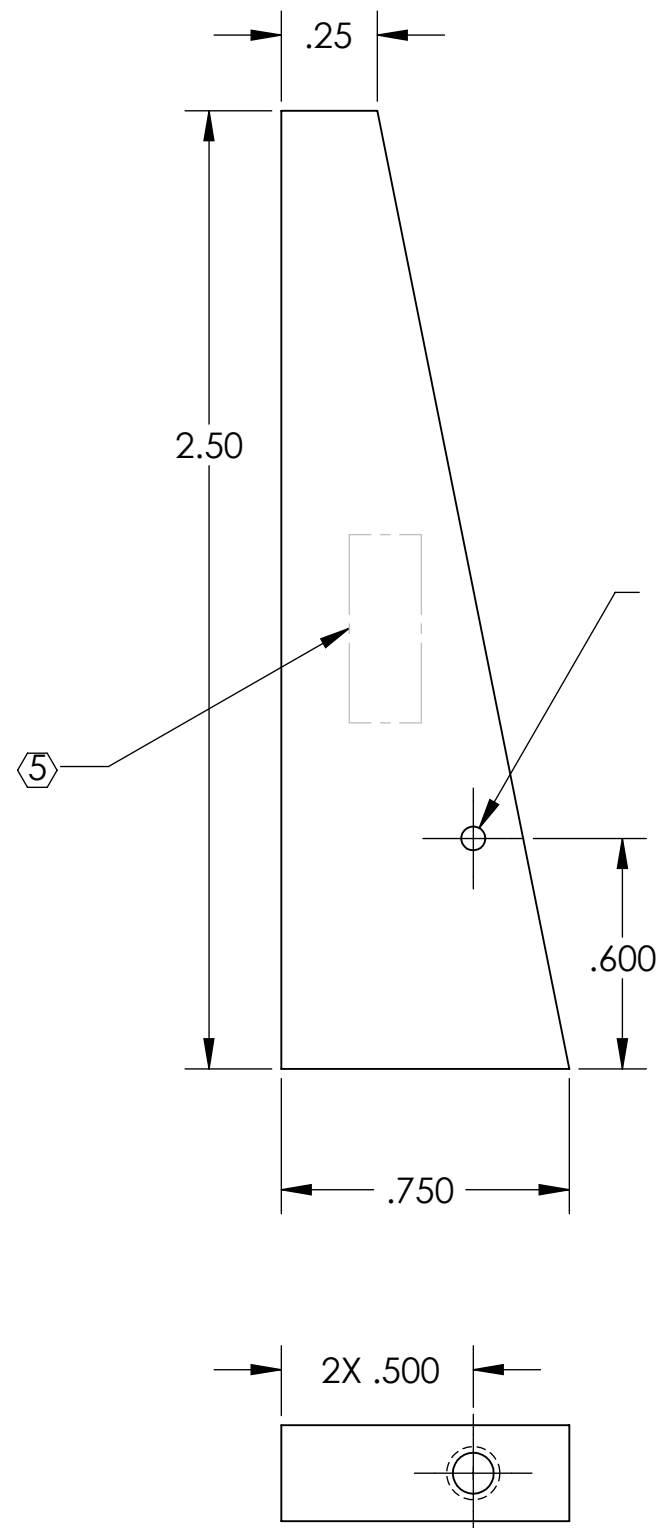


ϕ .06
VENT HOLE THRU TAP

3X #6-32 UNC ∇ .500
+.005 OVERSIZE TAP

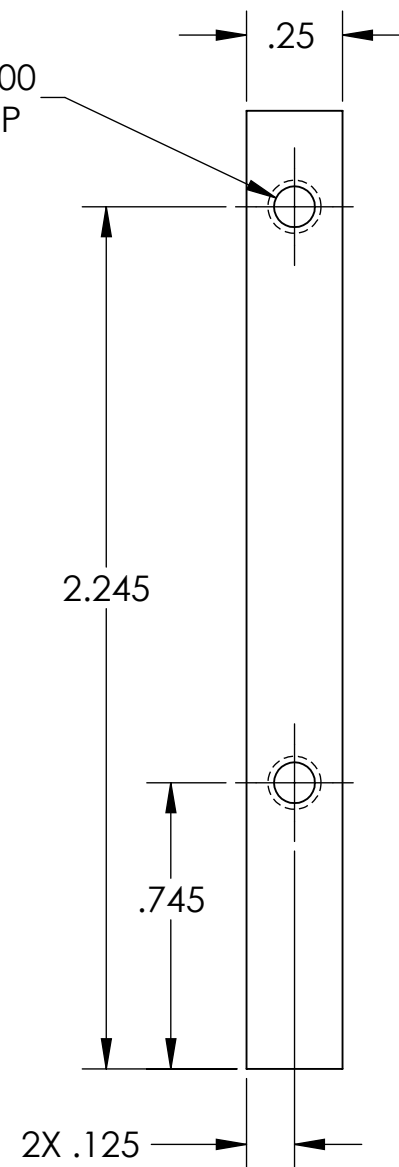

GENERAL VIEW
FOR REFERENCE ONLY
NO SCALE



NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 .XX \pm .01
 .XXX \pm .005
 ANGULAR \pm 0.5°

1. INTERPRET DRAWING PER ASME Y14.5-1994.
 2. REMOVE ALL SHARP EDGES, R.02 MIN.
 3. DO NOT SCALE FROM DRAWING.
 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

MATERIAL 6061-T6 Al **FINISH** 63 μ inch

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

SYSTEM ADVANCED LIGO **SUB-SYSTEM** AOS

NEXT ASSY D1001963

PART NAME OUTPUT ALIGNMENT FIXTURE SUPPORT

DESIGNER	TQ. NGUYEN	27 JUL 2010	SIZE	DWG. NO.	REV.
DRAFTER	TQ. NGUYEN	25 AUG 2010	B	D1001962	v2
CHECKER	M. SMITH		SCALE: 2:1	PROJECTION:	SHEET 1 OF 1
APPROVAL	D. COYNE				