




NOTES CONTINUED:

⑤ SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACE FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: DXXXXXXX-VY, S/N 001. A VIBRATORY TOOL MAY BE USED.

⑥ MACHINE ALL SURFACES.

REV.	DATE	DCN #	DRAWING TREE #

1/4-20 +0.005" ∇ 7

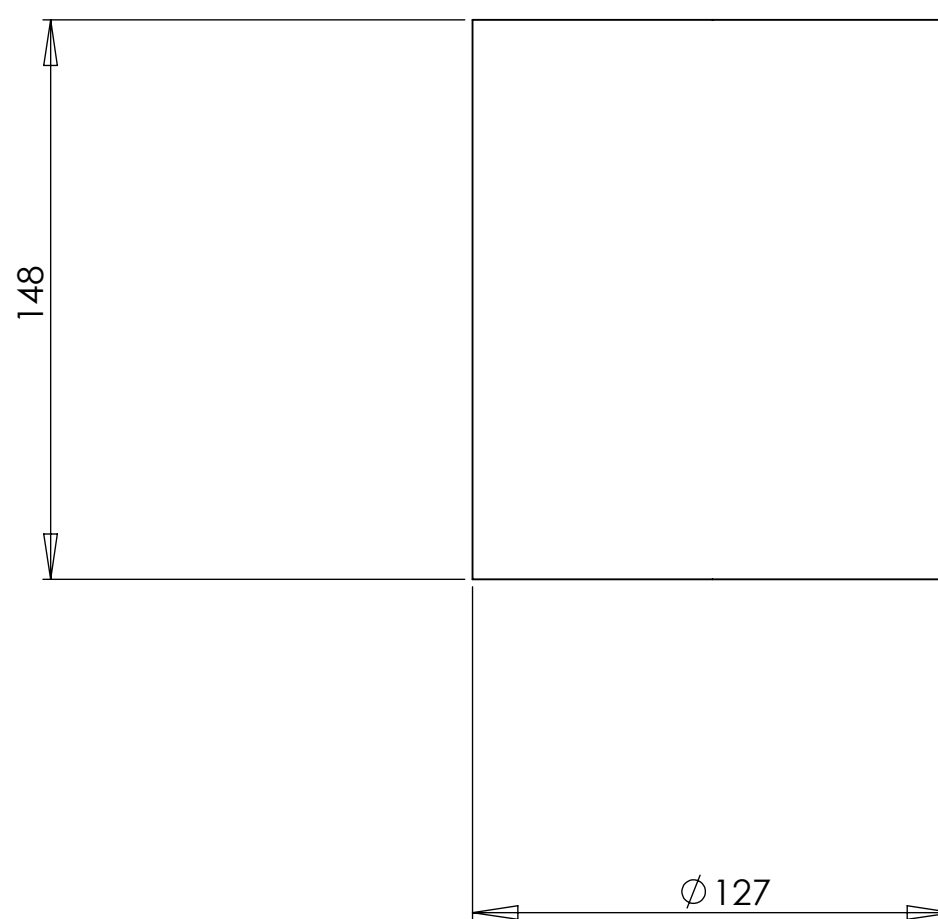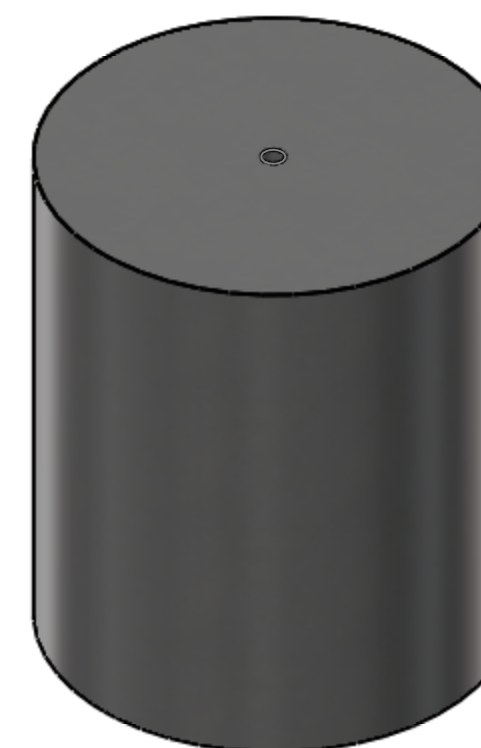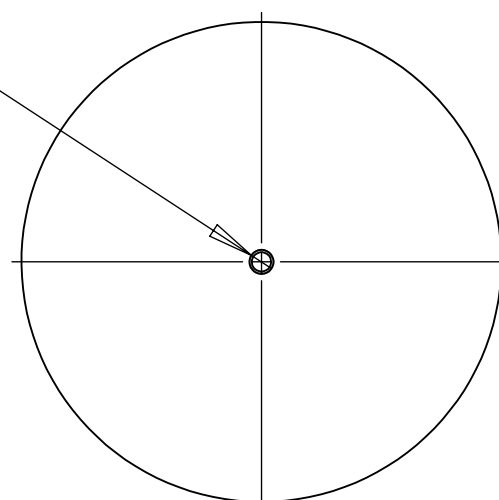

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

1. INTERPRET DRAWING PER ASME Y14.5-1994.
2. REMOVE ALL SHARP EDGES, R.02 MIN.
3. DO NOT SCALE FROM DRAWING.
4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

MATERIAL
AISI 316 Stainless Steel (SS)

FINISH
1.6 μ m



SYSTEM
ADVANCED LIGO

SUB-SYSTEM
SUS

NEXT ASSY

PART NAME
PROOF_TESTER_15KG-PROOF_MASS

DESIGNER L.CUNNINGHAM
DRAFTER L.Cunningham

CHECKER
APPROVAL

SIZE c
DWG. NO. D1002071
REV. v1

SCALE: 1:2
PROJECTION: SHEET 1 OF 1

DIMENSIONS ARE IN MM

TOLERANCES:
.XX ± 0.10
.XXX ± 0.010

ANGULAR ± 0.2°