



LIGO: Status of instruments and observations


David Shoemaker
For the LIGO Scientific Collaboration
MG11, Berlin, July 2006

LIGO: 1989 Proposal to the US NSF

PREFACE


This proposal requests support for the design and construction of a novel scientific facility—a gravitational-wave observatory—that will open a new observational window on the universe.

The scale of this endeavor is indicated by the frontispiece illustration, which shows a perspective of one of the two proposed detector installations. Each installation includes two arms, and each arm is 4 km in length.

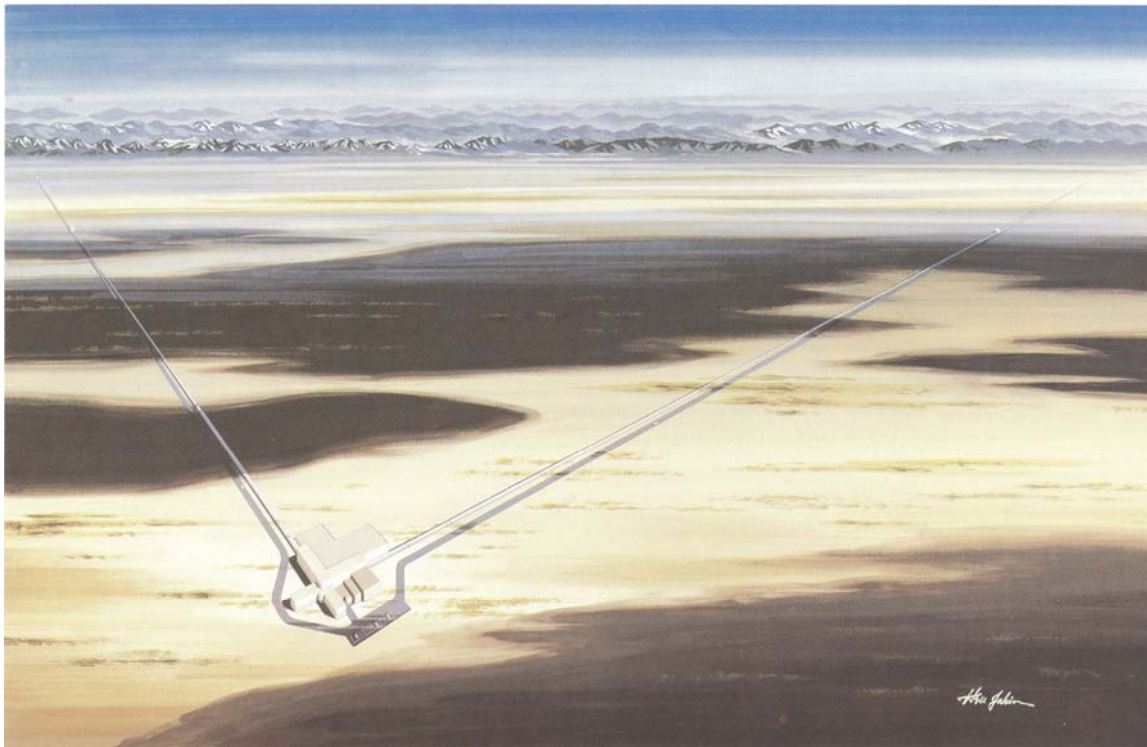



LIGO: Today, Washington state...

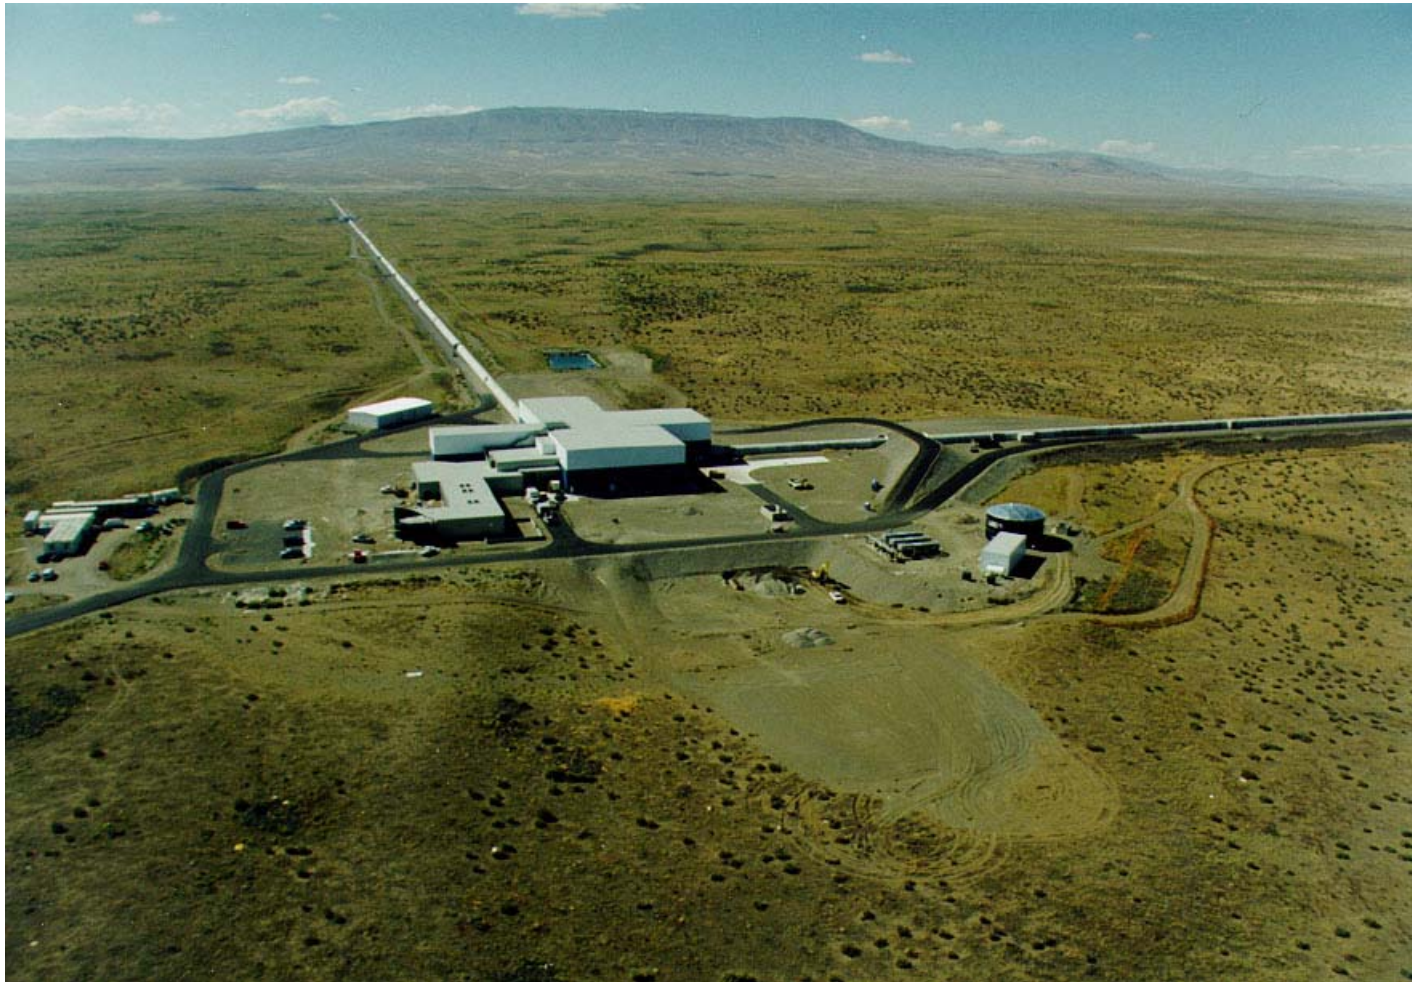


...LIGO in Louisiana



A LIGO Detector, 1989 Proposal

Important scaling laws:

- 1) Length: $\lambda_{\text{GW}} \sim 100 \text{ km}$
- 2) Arm storage time: GW period $\sim 10 \text{ msec}$
- 3) Laser power: fringe splitting precision $\sim \sqrt{\text{Power}}$

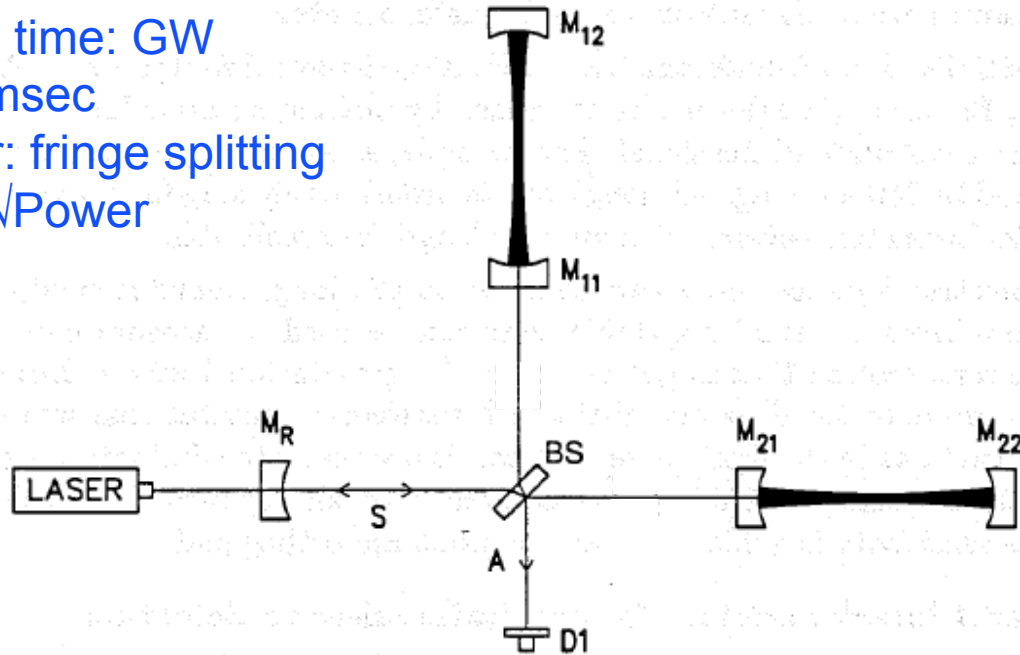


$$h = \Delta L / L$$

$$L \sim 4 \text{ km}$$


$$\text{We need } h \sim 10^{-21}$$

$$\text{We have } L \sim 4 \text{ km}$$


$$\text{We see } \Delta L \sim 10^{-18} \text{ m}$$

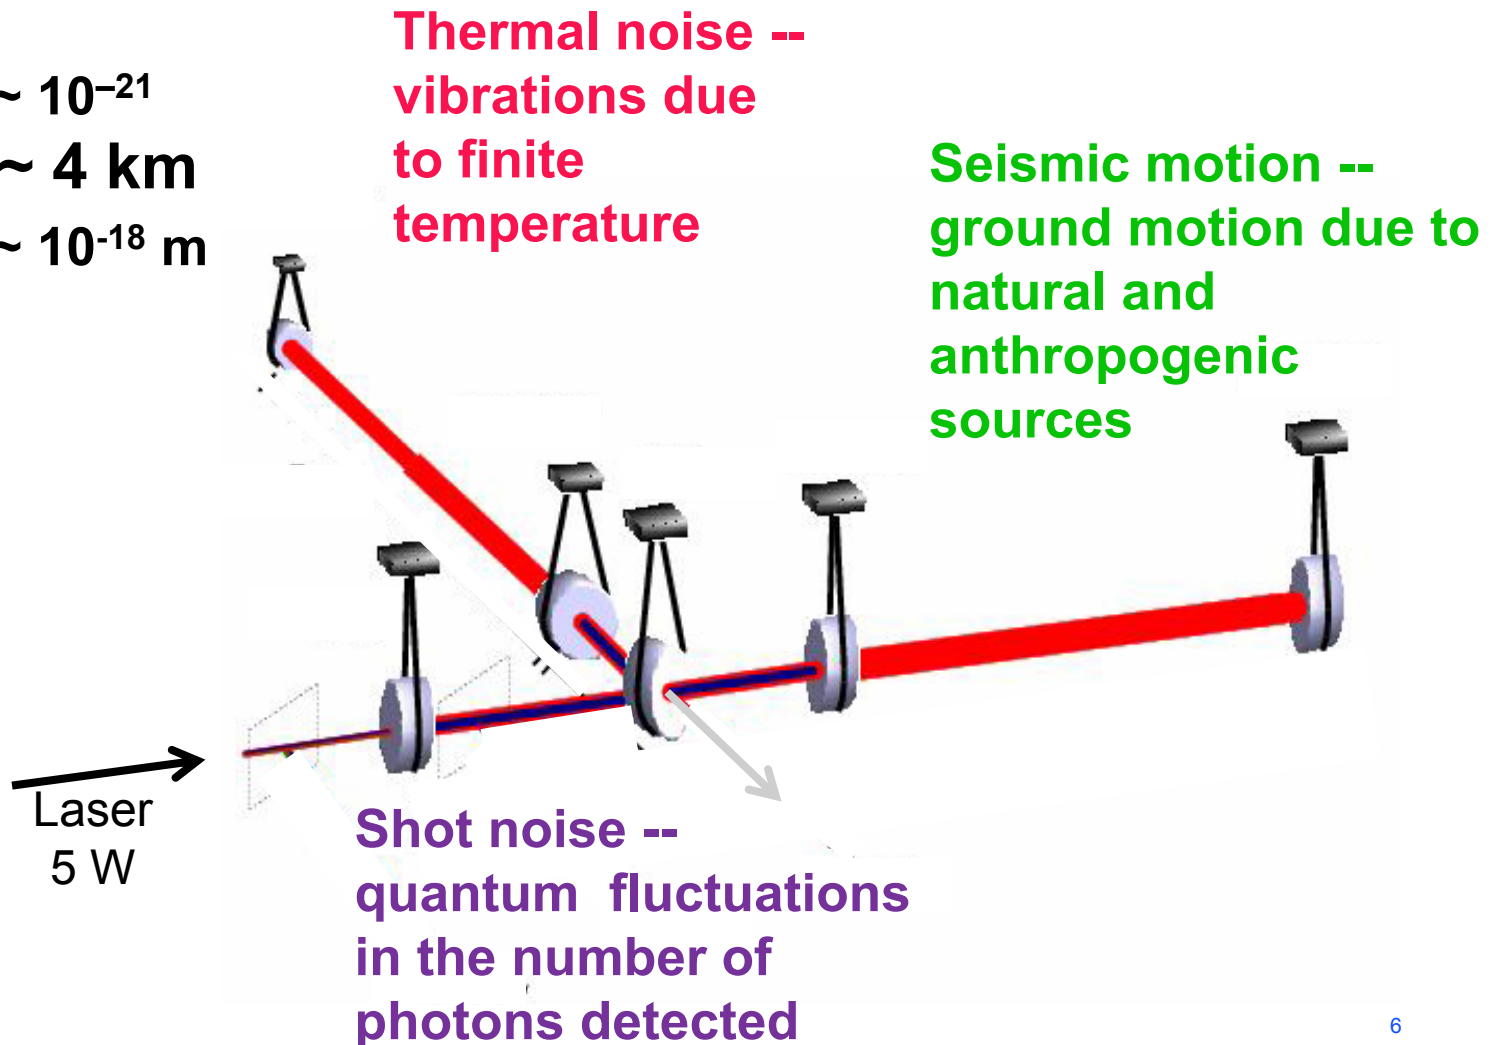


Fused Silica, 10 kg, 25 cm diameter and 10 cm thick
Polished to $\lambda/1000$ (1 nm)

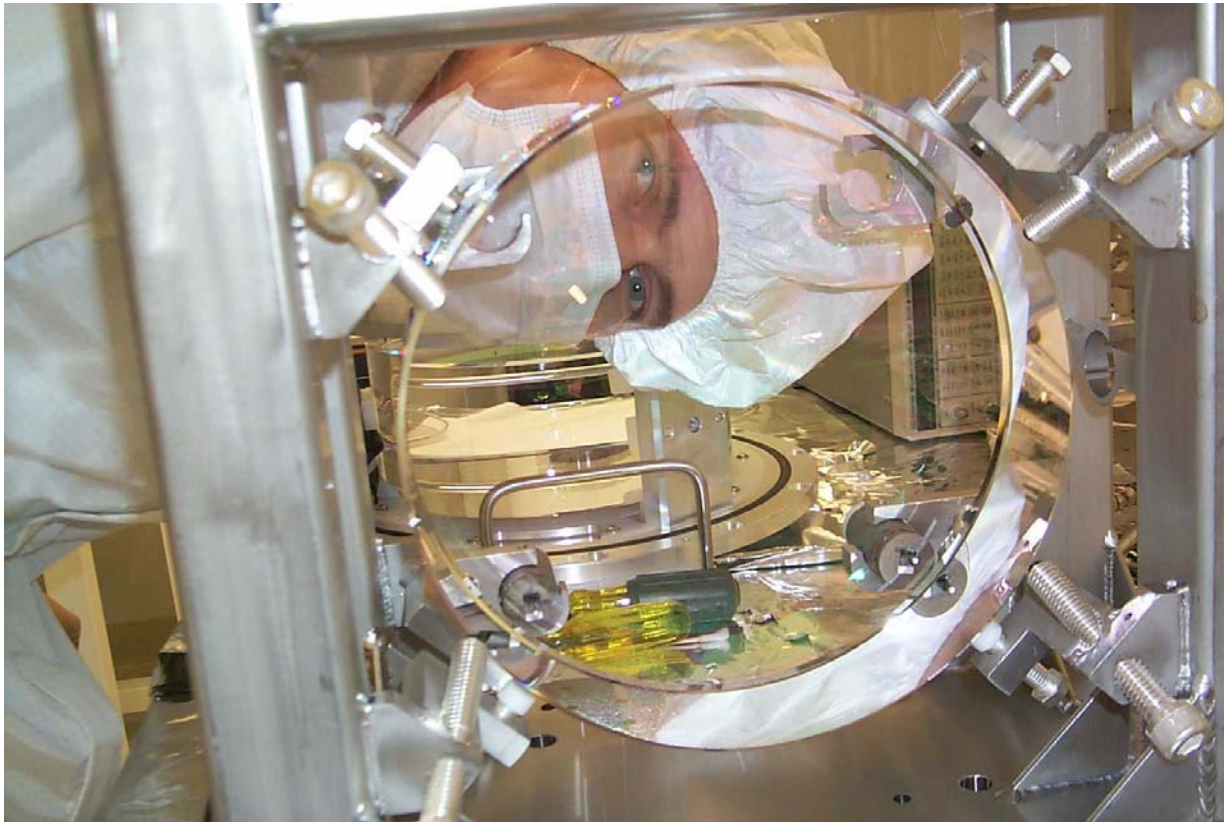

Test mass suspensions

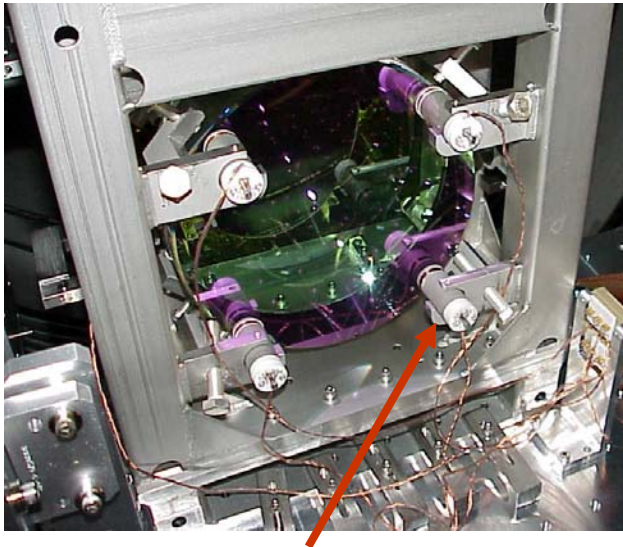


Optics
suspended
as simple
pendulums

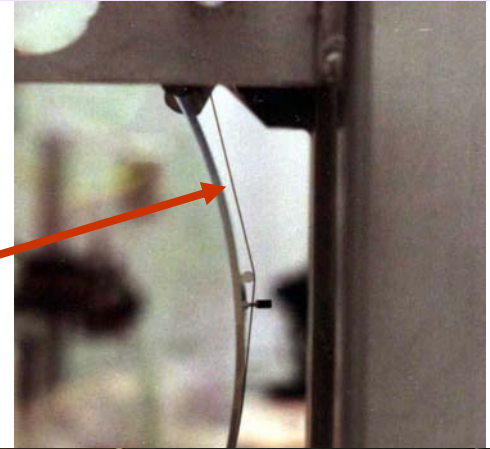


Shadow sensors & voice-coil
actuators provide
damping and control forces




stack of mass-springs

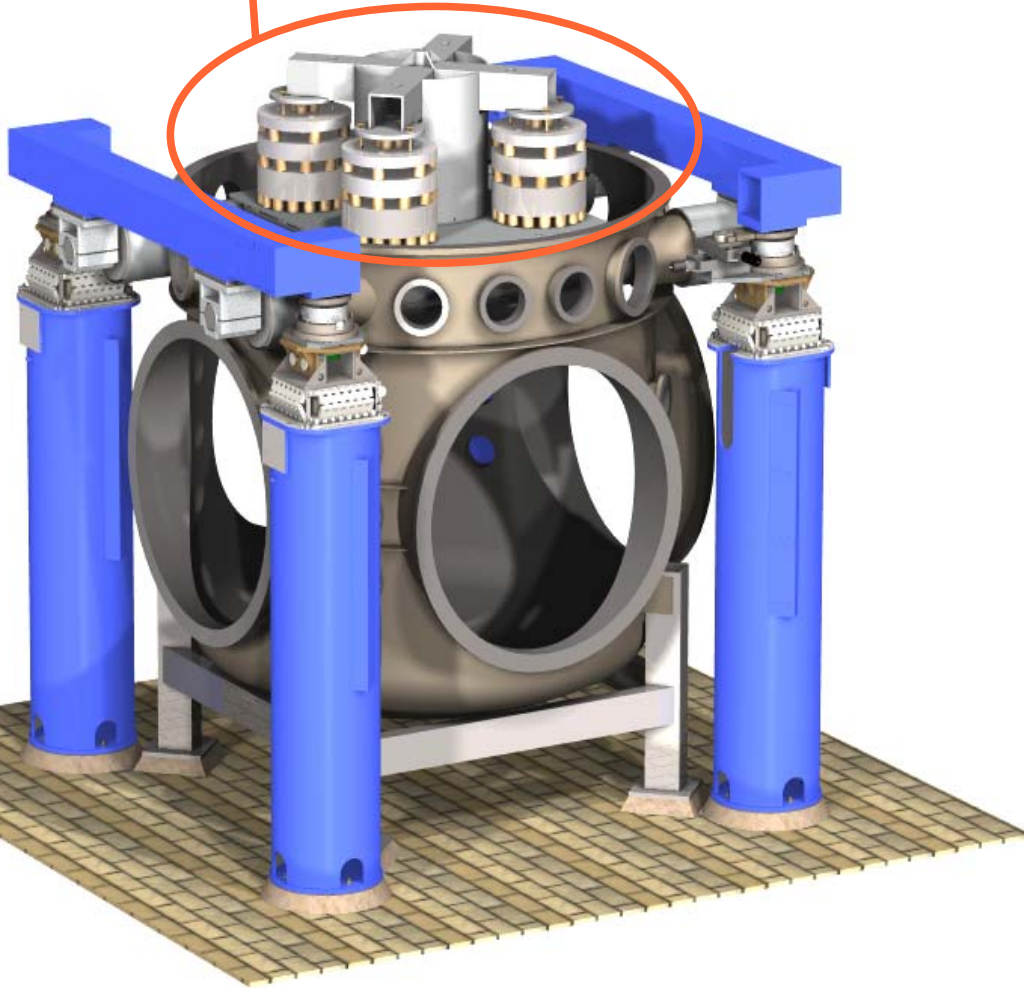

Modeled Vibration Isolation Performance

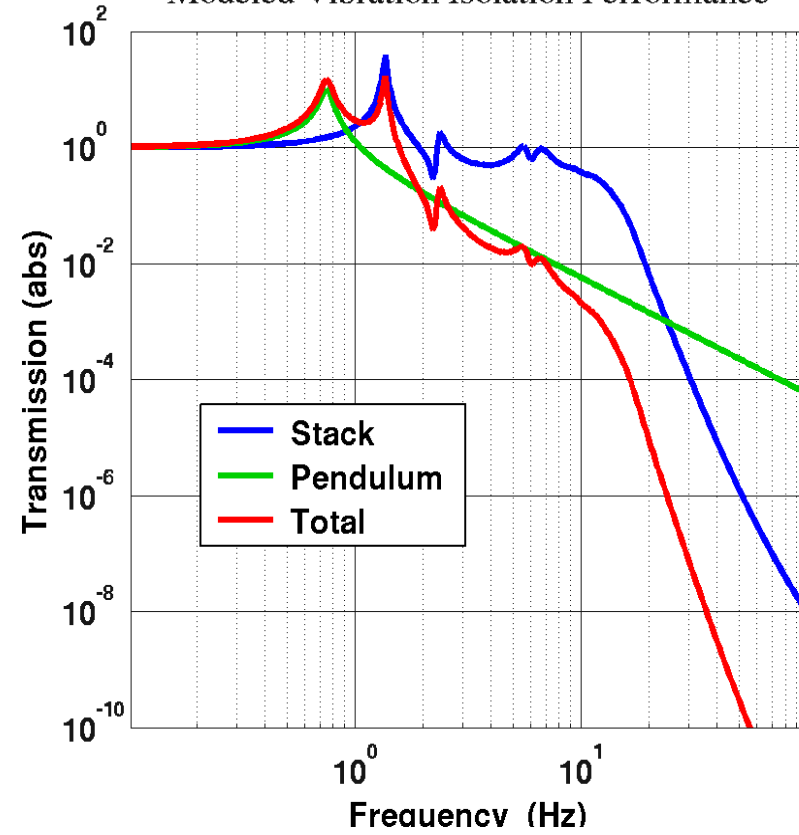

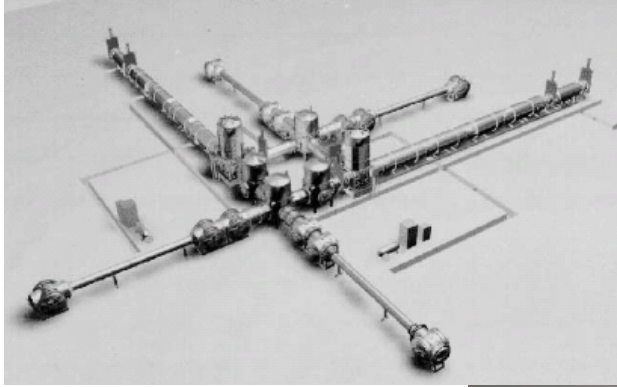


- 1.2 m diameter
 - Multiple beams can be accommodated
 - Optimum also for cost considering pumping
- Aligned to within mm over km (correcting for curvature of the earth)
- Total of 16km fabricated with no leaks
- Cover needed (hunters...)






The planned sensitivity of LIGO, 1989 Proposal

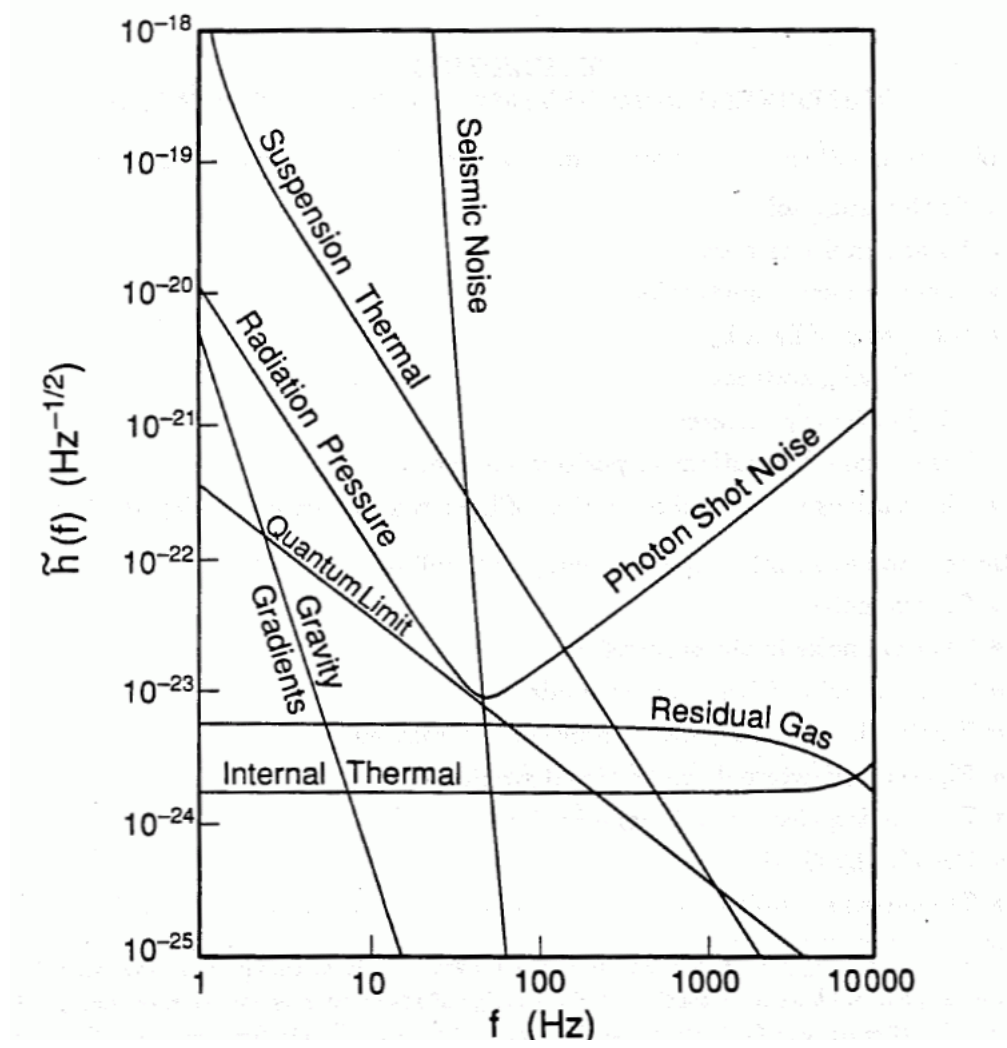


The current sensitivity of LIGO

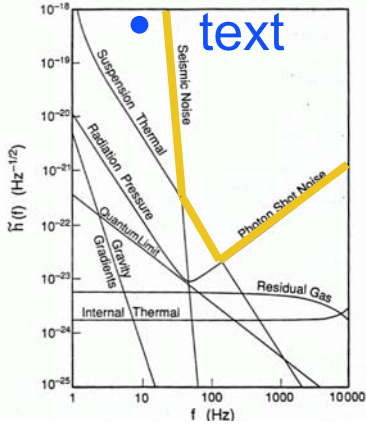

- SRD: Science Requirements Document target
- Initial LIGO performance requirement: $h_{\text{RMS}} \leq 10^{-21}$ over 100Hz Bandwidth
- Current performance $\sim h_{\text{RMS}} \approx 4 \times 10^{-22}$
- **Success!**

Seismic noise


Many contributors, maybe including thermal noise

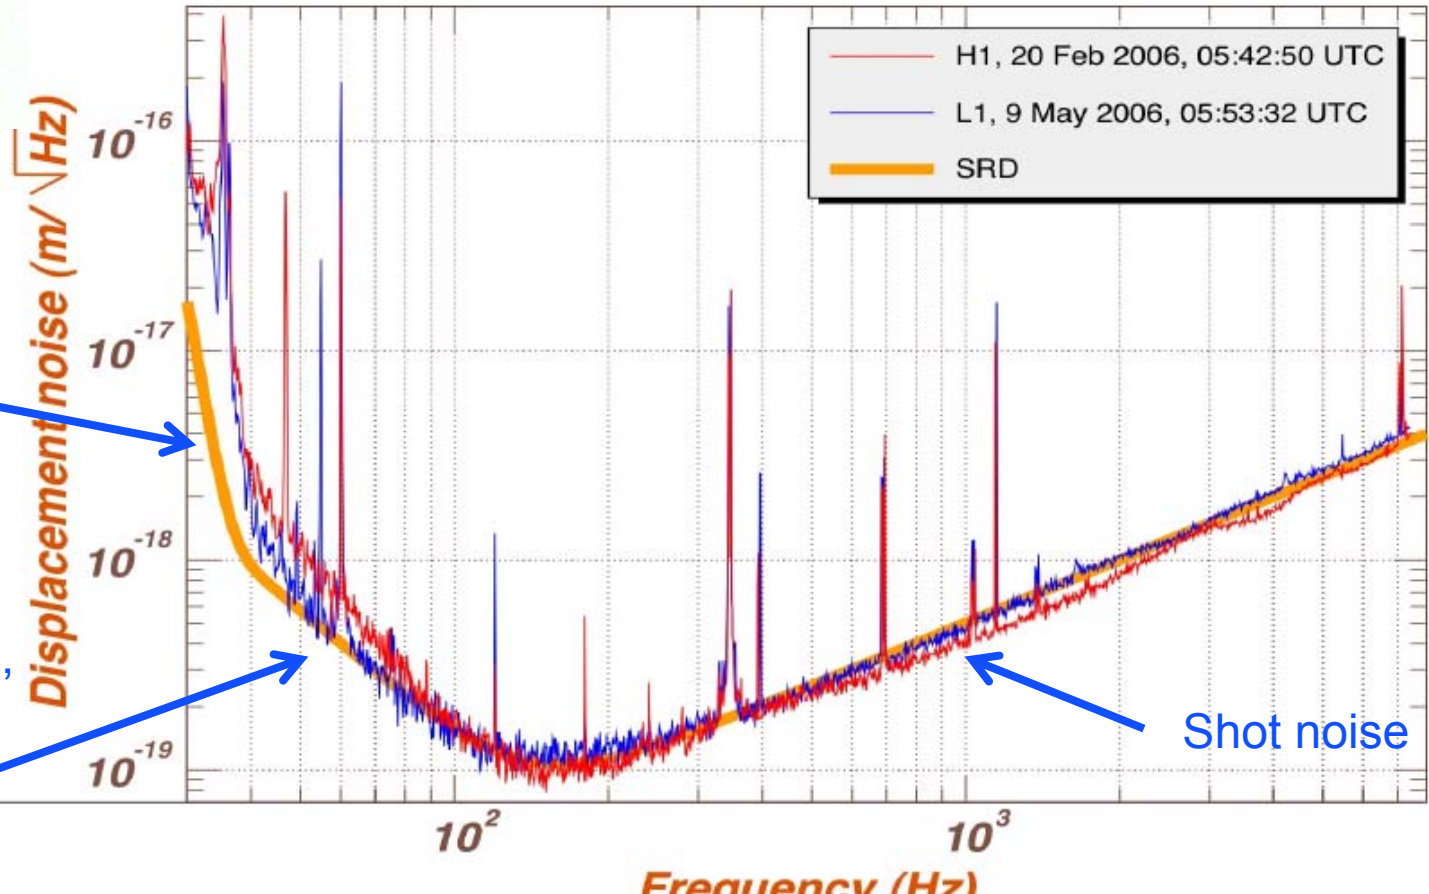

Shot noise

LIGO is observing

- Present S5 Science Run to collect one integrated year of data
- Roughly 70% duty cycle; more than 35% complete

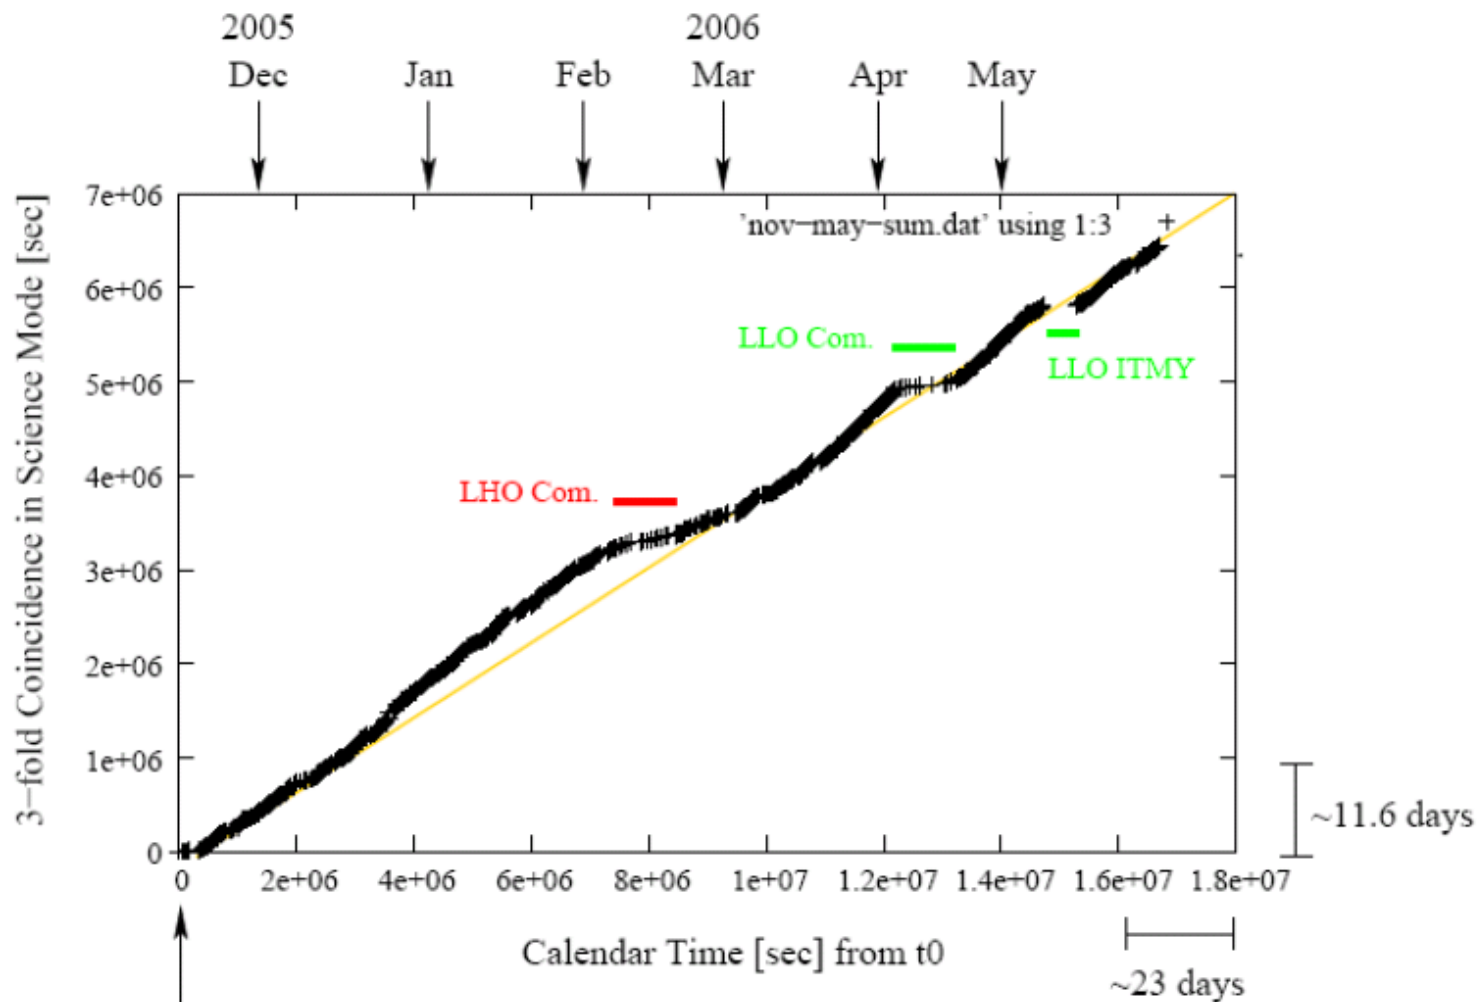

LIGO in the larger context, 1989 Proposal

B. National Context

We envision the LIGO as an initial quasi-experimental project, focused upon the invention, development, verification, and first use of technologies for laser interferometer gravitational-wave astronomy, with a gradual transition to a mature facility. The early stages of evolution will be conducted primarily by the Caltech/MIT LIGO team, followed by a gradual transition to broader-based national and international participation.

Caltech and MIT, with the principal support of the National Science Foundation (NSF), have invested close to two decades of effort in developing a laser interferometer for gravitational-wave astronomy. The two institutions are committed to continuing a vigorous program leading to the establishment of the LIGO and gravitational-wave astronomy, and subsequently developing, operating, and maintaining LIGO under NSF sponsorship in the interest of the scientific community.

Completion of the LIGO, bringing it to operational readiness in the course of the early search for gravitational waves and, ultimately, conversion to a broadly accessible facility, will require the full commitment and expertise of the Caltech/MIT team. It is expected that once a firm NSF commitment towards construction and operation of the LIGO exists, a broader-based national scientific community will be interested in participation.



LIGO today is the Lab **plus** The LIGO Scientific Collaboration (LSC)

- The LSC carries out the scientific program of LIGO – instrument science, data analysis.
- The 3 LIGO interferometers and the GEO600 instrument are analyzed as one data set
- Approximately **540** members
- ~ **35** institutions plus the LIGO Laboratory.
- Participation from Australia, Germany, India, Italy, Japan, Russia, Spain, the U.K. and the U.S.A.



....Let's look at what the LSC is doing



- First effort is to understand instrument and deviations from ideal behavior
 - » Extensive 'Detector Characterization' tools and intelligence
- Working groups formed by instrument scientists and analysts, from entire LSC, addressing LIGO and GEO data
 - » Intensive data analysis exercises between the LSC and Virgo -- Preparation for joint data analysis to commence in the near future
- Concentrating on classes of sources:
 - » Bursts, with or without triggers from other observations
 - » Binary inspirals, of various objects
 - » Periodic sources of GWs
 - » Stochastic backgrounds

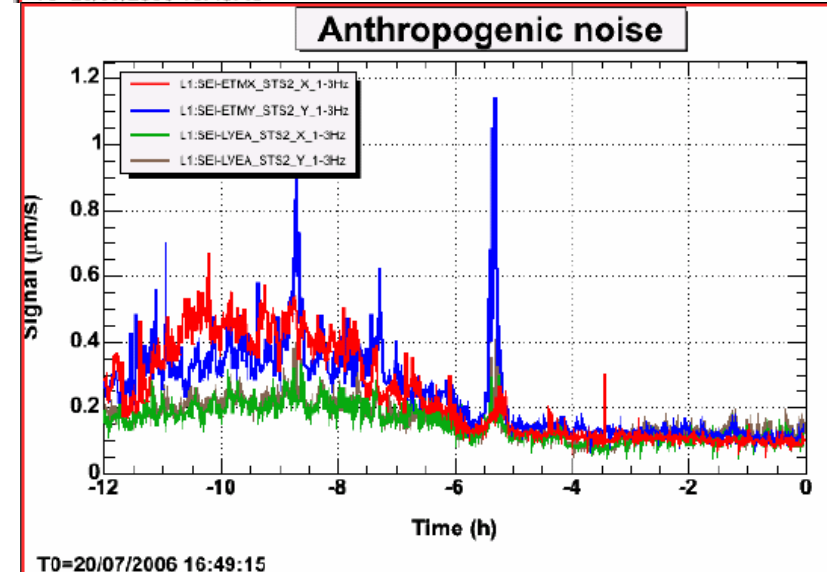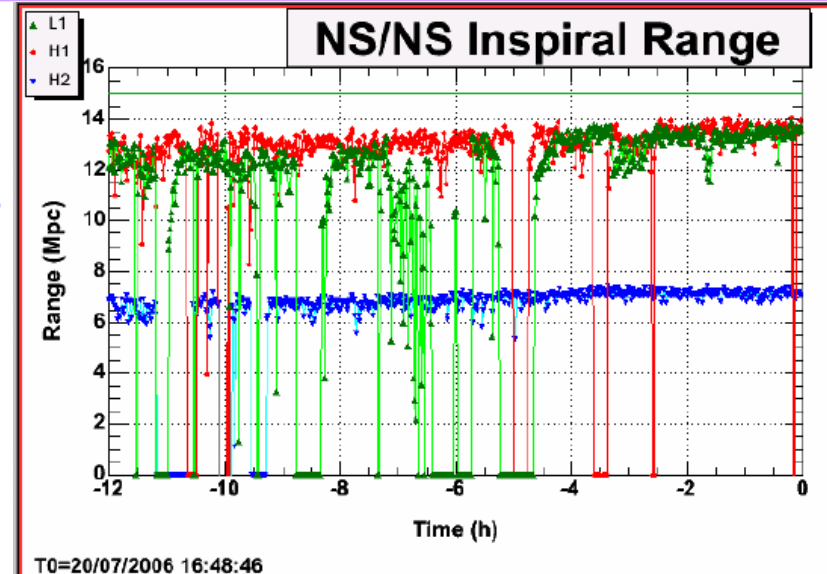


- General un- and ill-defined waveform search
 - » Core-collapse supernovae
 - » Accreting/merging black holes
 - » Gamma-ray burst engines
 - » Kinks/cusps in cosmic strings
 - » ...or things we have not yet imagined
- No certain template a priori possible; thus, look for excess of power in instrument
- Require detection in widely separated instruments, time delay consistent with position in sky, and no recognizable instrumental vetoes
- Requires intimate knowledge of instrument behavior!
- Nice also to have a trigger (GRB, neutrino, etc.)

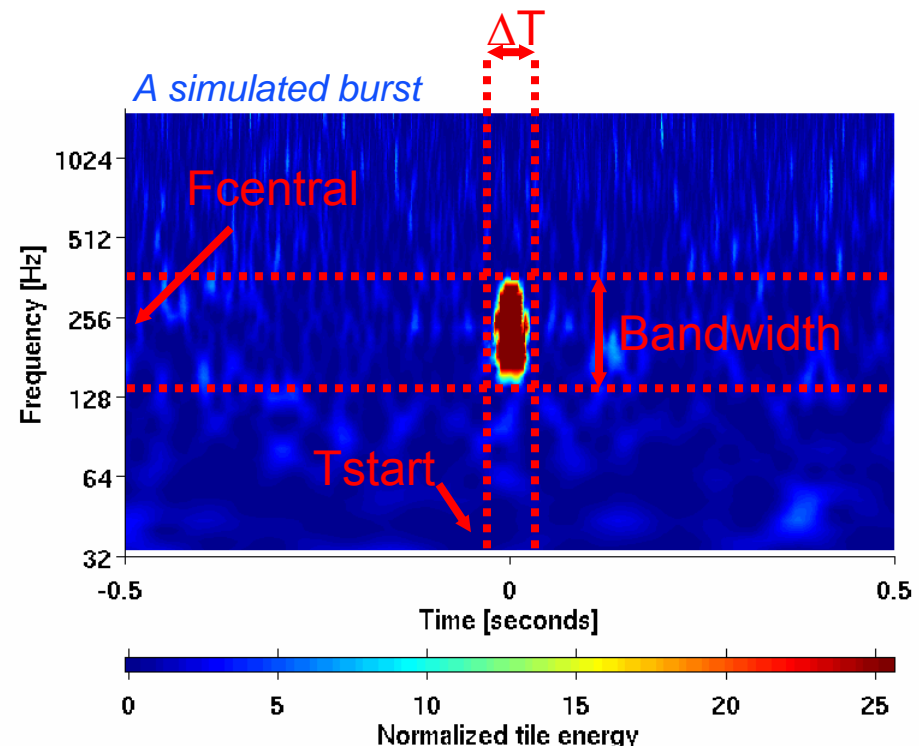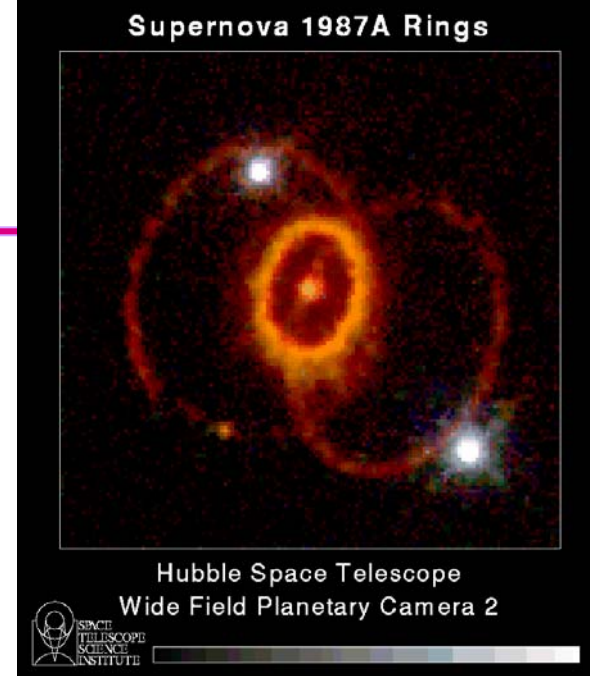


- No gravitational wave bursts detected during S1, S2, S3, and S4; upper limits set through injection of trial waveforms
- S5 anticipated sensitivity, determined using injected generic waveforms to determine minimum detectable in-band energy in GWs
- Current sensitivity:
 $E_{\text{GW}} > 1 \text{ Msun @ 75 Mpc}$,
 $E_{\text{GW}} > 0.05 \text{ Msun @ 15 Mpc}$
 (Virgo cluster)

Science Run 4

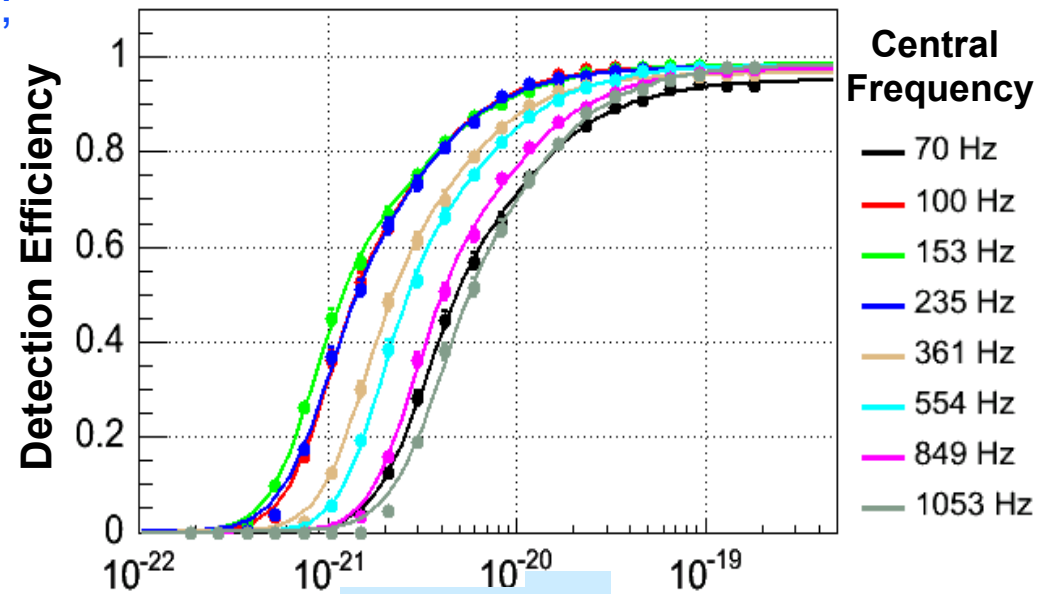


$$h_{\text{RSS}} = \sqrt{\int |h(t)|^2 dt}$$


Gaussian pulse




235Hz Sine Gaussian

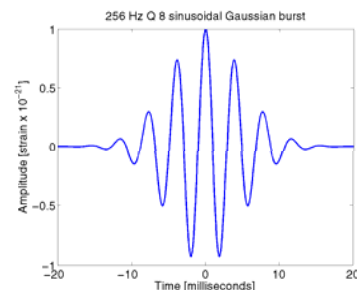

50Mo BBH merger





Supernova (from ZM catalog)




Binary Inspirals

- Neutron star or Black hole binary up to ~ 70 solar masses
- Template search over best-understood ‘chirp’ section of waveform, gives very good rejection of spuria
- Becomes more complicated with spins...many more templates!

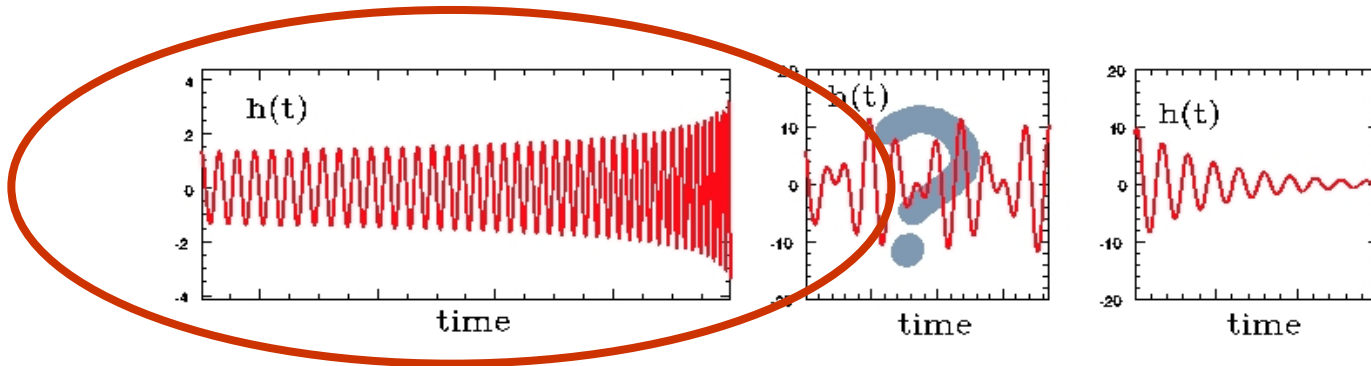
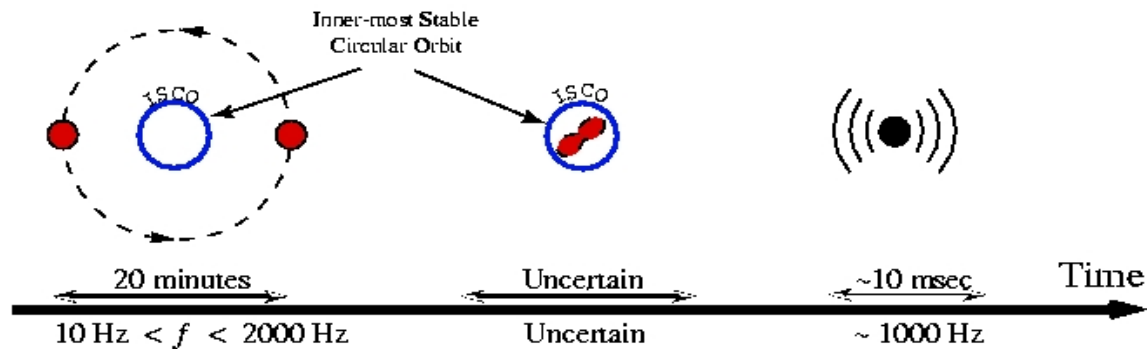


Binary Inspirals


binary neutron star horizon distance

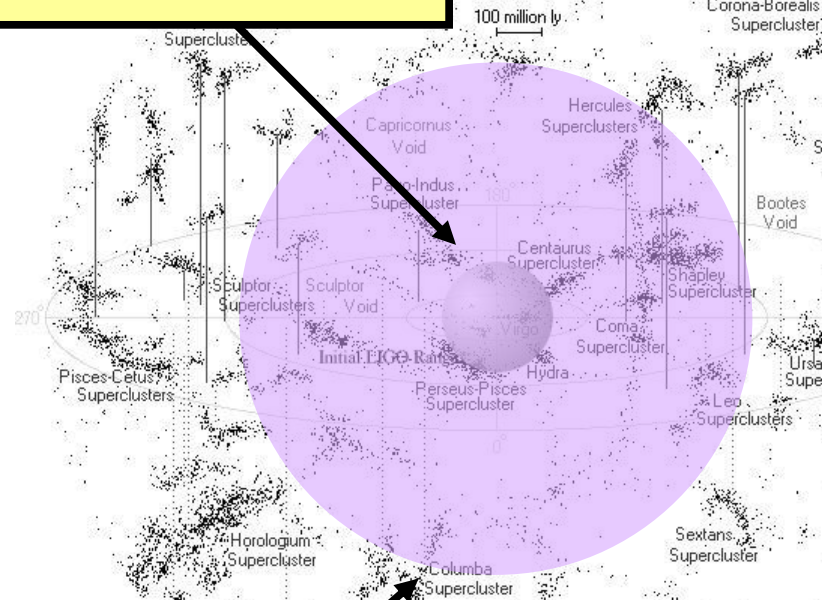

binary black hole horizon distance

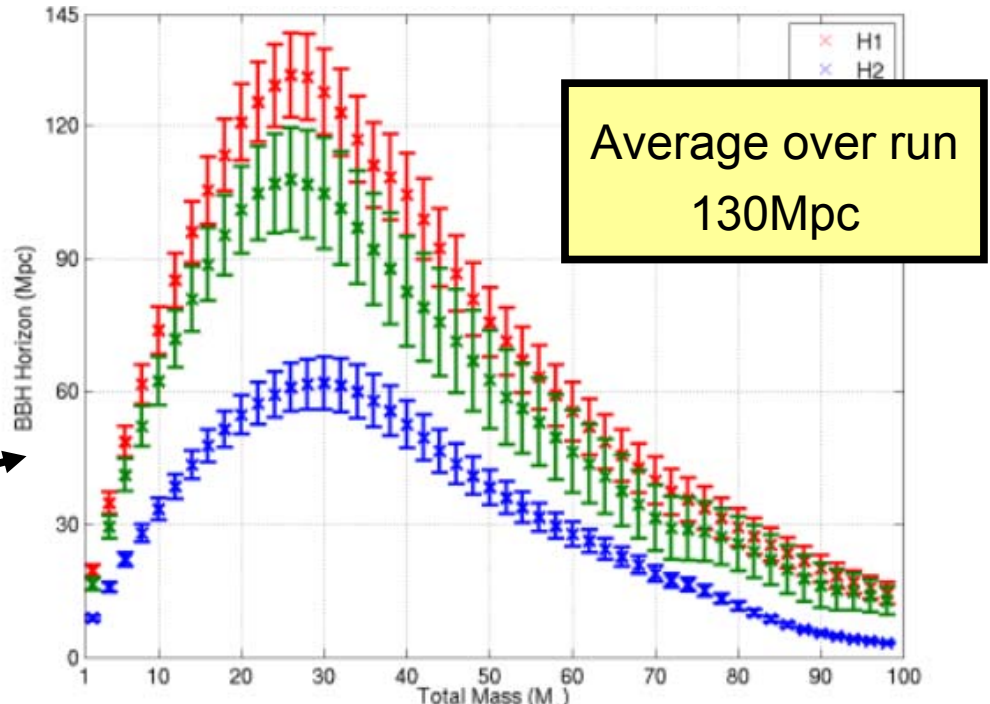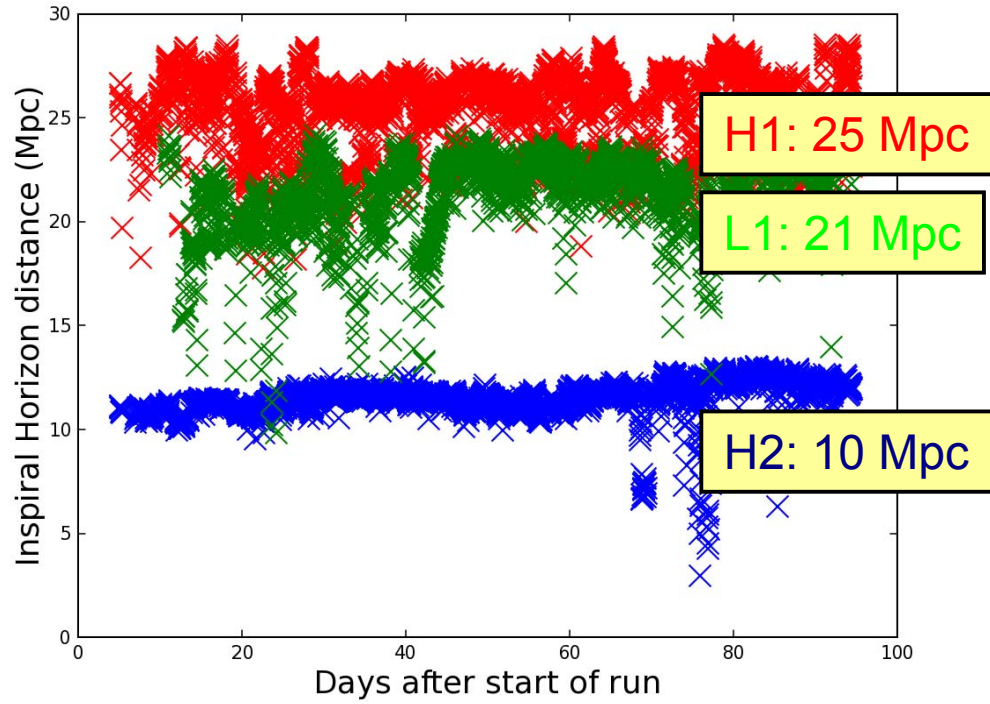

Average over run
130Mpc

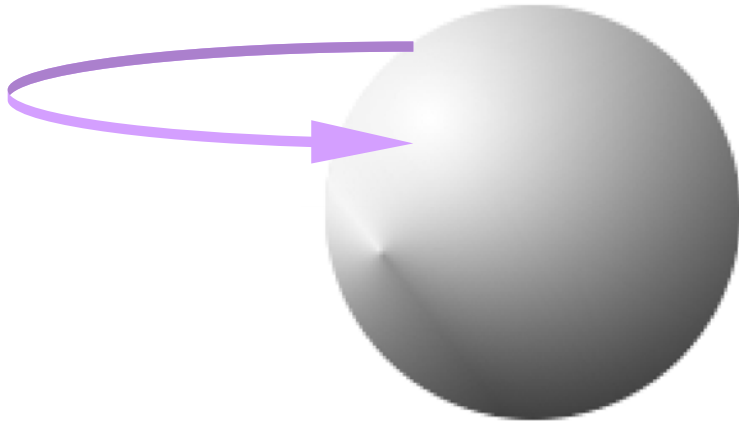

Bumpy Neutron Star

Low-mass x-ray binary




Wobbling pulsars




- Known pulsar searches

- » Catalog of known pulsars
- » Narrow-band folding data using pulsar ephemeris
- » Approaching Crab spin-down upper limit
- » Lowest ellipticity limit so far: PSR J2124-3358, (fgw = 405.6Hz, r = 0.25kpc)
- » ellipticity = 4.0×10^{-7}

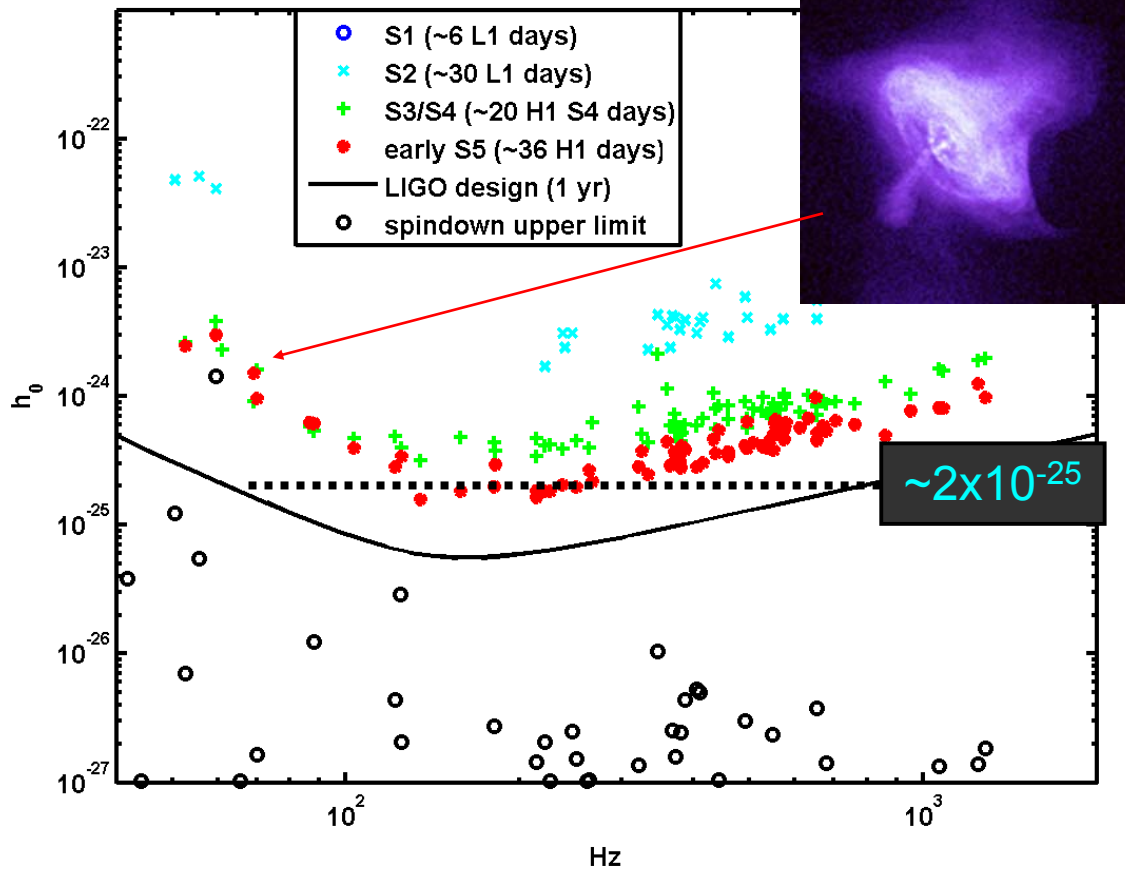



- Wide area search

- » Doppler correction followed by Fourier transform for each 'pixel'
- » Computationally very costly
- » Einstein@Home – 'SETI' model of home computation
- » ~25 Teraflops

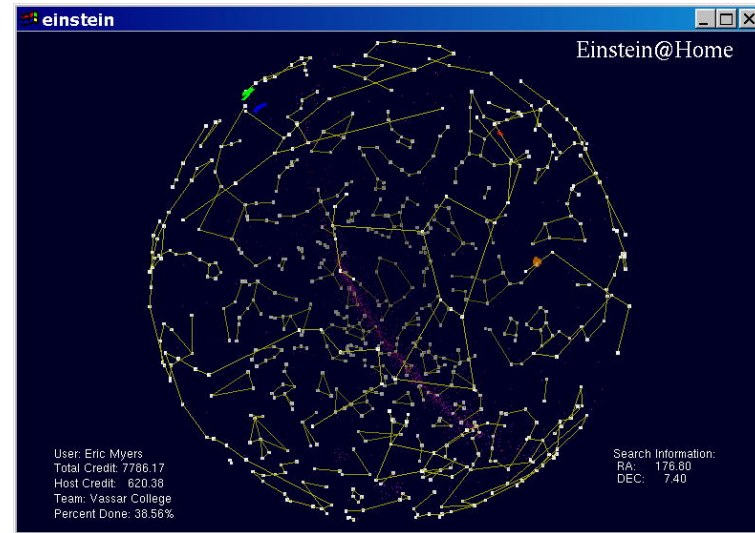

cosmic gravitational-wave background (10^{-22}s)


cosmic microwave background (10^{+12}s)

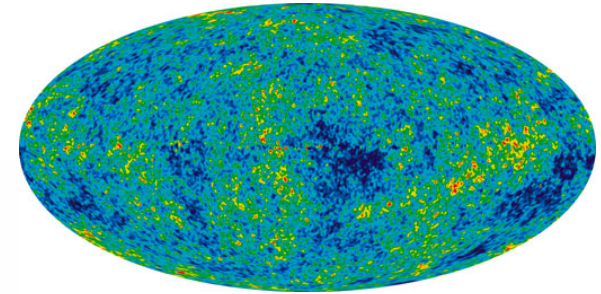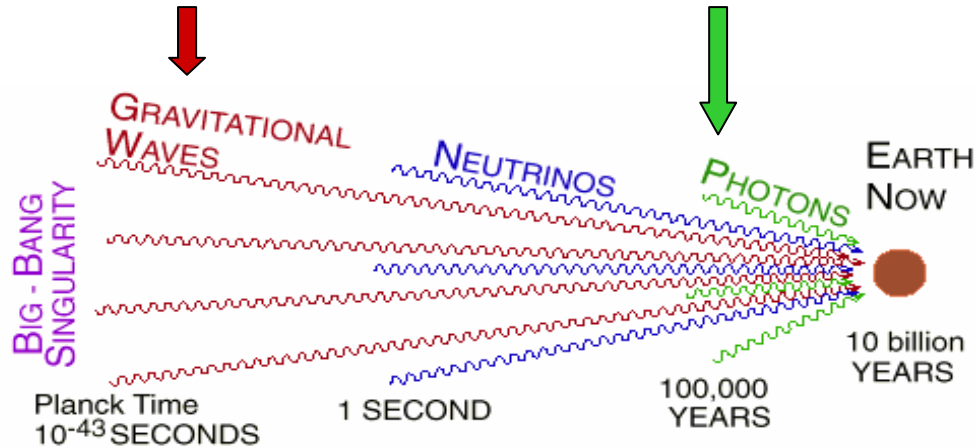


- Cosmological background from Big Bang (analog of CMB) most exciting potential origin, but not likely at a detectable level
- ...or, Astrophysical backgrounds due to unresolved individual sources
- All-sky technique: cross-correlate data streams; observatory separation and instrument response imposes constraints

Seismic wall

“Overlap Reduction Function”
(determined by network geometry)

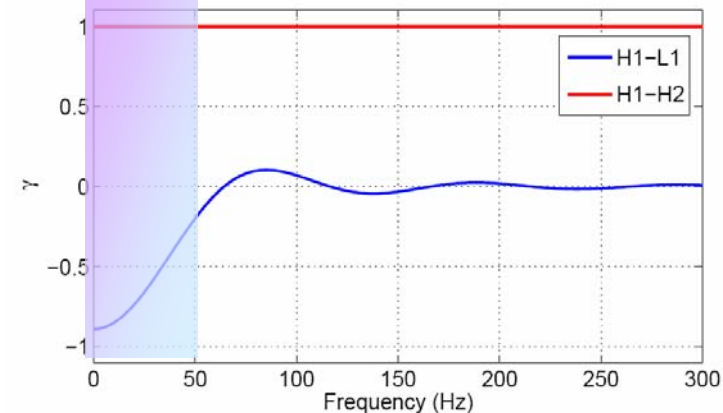

- Best result to date: $\Omega_{90\%} = 6.5 \times 10^{-5}$

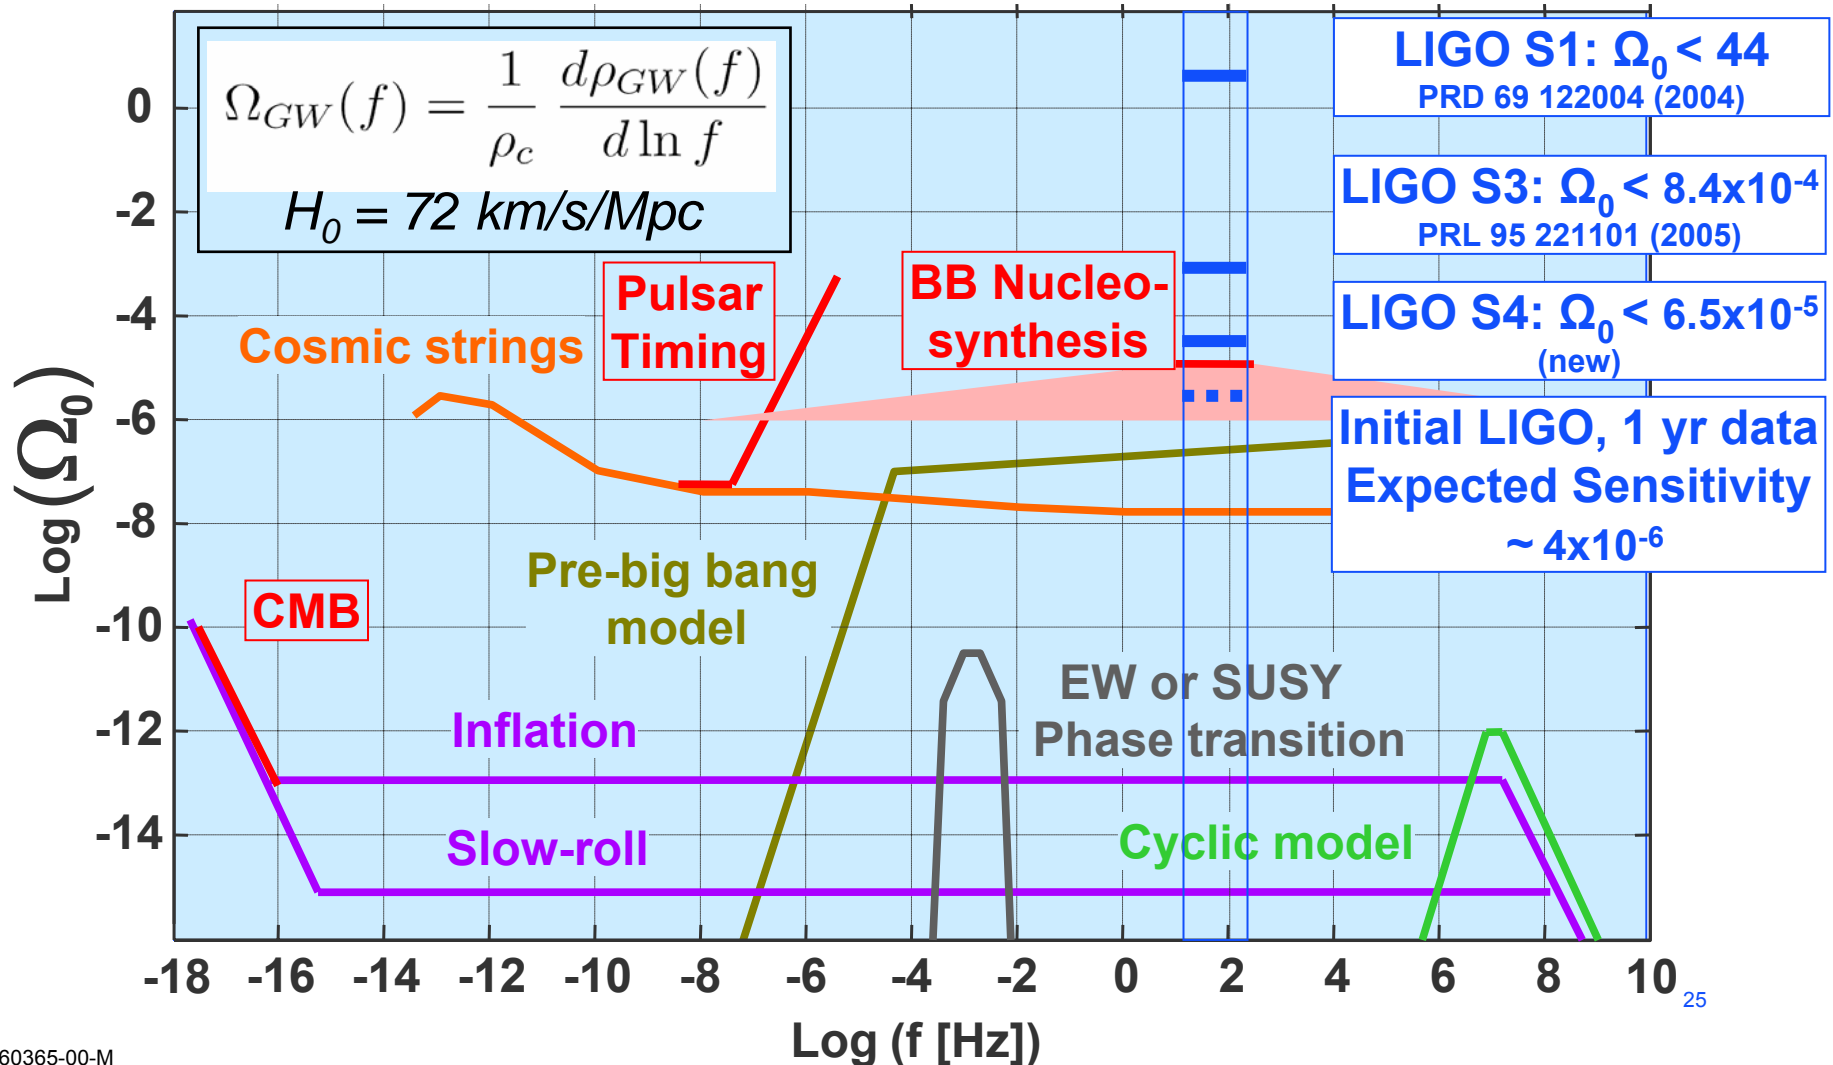


- Several km-scale detectors, bars now in operation
- Network gives:
 - » Detection confidence
 - » Sky coverage
 - » Duty cycle
 - » Direction by triangulation
 - » Waveform extraction




© 1988-1997 Microsoft and/or its suppliers. All rights reserved.

What happens next?

- Increases in sensitivity lead to (Increases)³ in rate, so...
- Some enhancements to initial LIGO in planning
- Increased laser power, associated technical changes
- ~factor 2 in sensitivity, ~8 in 'rate'

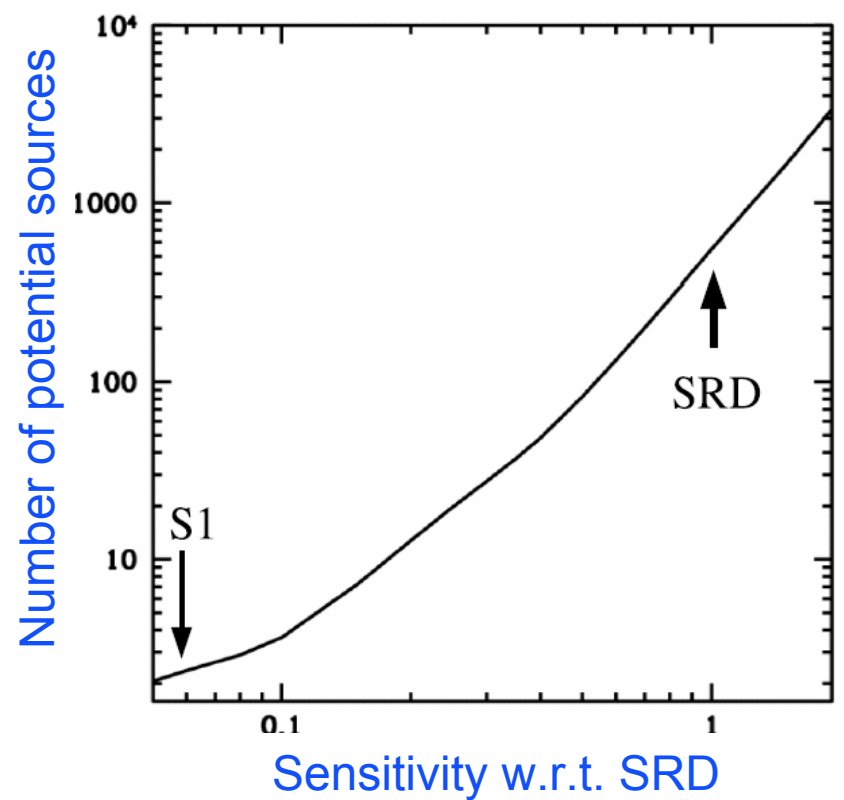

- Start to prepare now, be ready for end of present S5 science run
- Install, commission during 2 years, then observe for ~1.5 years
- Be ready to decommission for start of Advanced LIGO installation

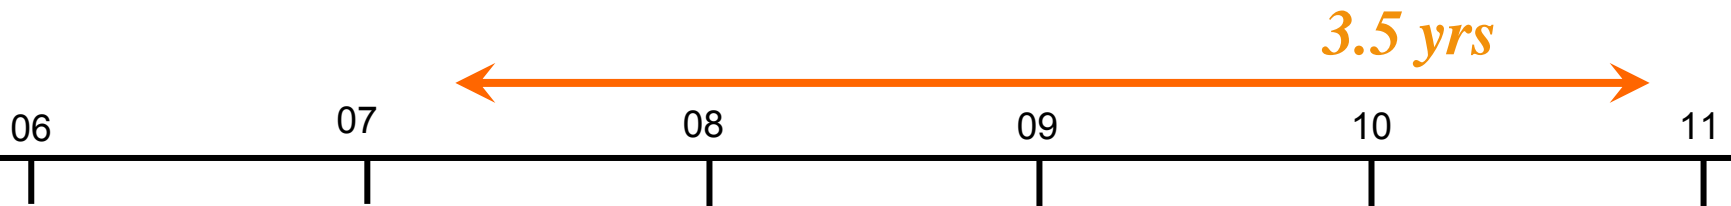

S5

~2 years

S6

Decomm
IFO1

Advanced LIGO: 1989 Proposal


B. Evolution of LIGO Interferometers

To detect gravitational waves, the use of high performance detectors in extended observational runs is necessary. Development of better detectors that enhance our ability to make new discoveries is also vital. A continuing detector development program is planned to improve LIGO capabilities. The design of the first LIGO interferometer emphasizes simplicity, so that we may place a detector in service as rapidly as possible; succeeding generations of interferometers will more fully exploit the unique capabilities of the LIGO.



2. Development of the second-generation LIGO detector


While the Mark I detector is going into operation, campus development of the second-generation LIGO detector, Mark II, will be proceeding. The Mark II design will include options not incorporated in Mark I and improvements based on the experience gained from operating Mark I. The advantages of new technology, made available after the Mark I design freeze, will be evaluated.





- A significant step forward toward an astronomy of gravitational wave sources
- A factor of 10 in sensitivity, thus a factor of 1000 in rate
- ...a year of observation with initial LIGO is equivalent to just several hours of observation with Advanced LIGO

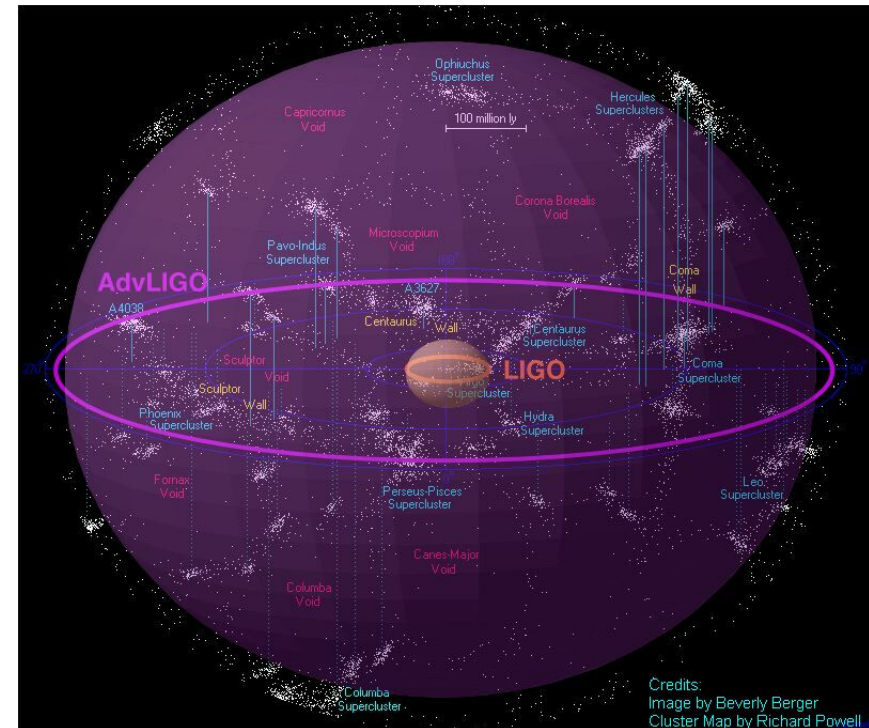




- Factor **10** better amplitude sensitivity
 - » $(\text{Reach})^3 = \text{rate}$
- Factor **4** lower frequency bound
- Tunable for various sources
- NS Binaries: for three interferome
 - » Initial LIGO: ~20 Mpc
 - » Adv LIGO: ~300 Mpc
- BH Binaries:
 - » Initial LIGO: $10 M_{\odot}$, 100 Mpc
 - » Adv LIGO : $50 M_{\odot}$, $z=2$
- Stochastic background:
 - » Initial LIGO: $\sim 3e-6$
 - » Adv LIGO $\sim 3e-9$
(due to improved overlap)

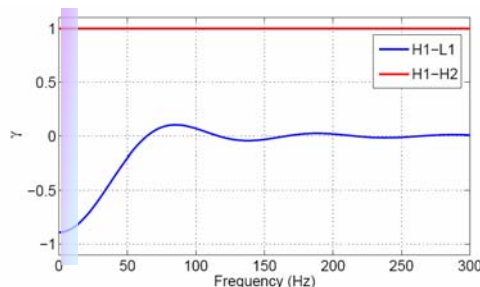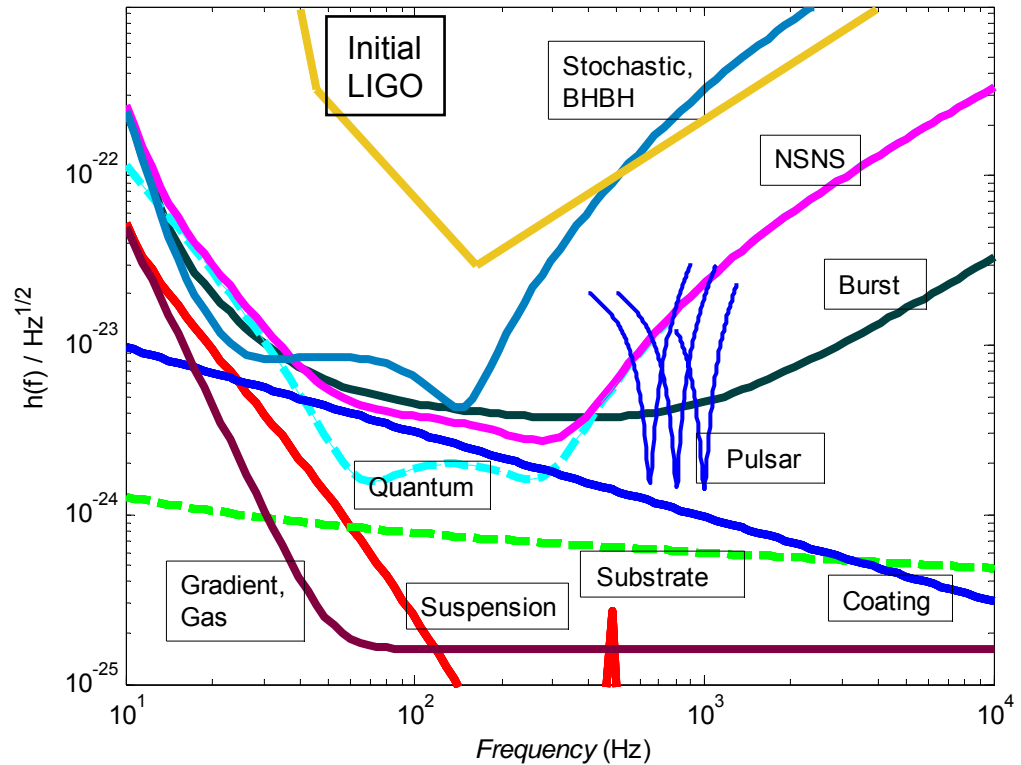

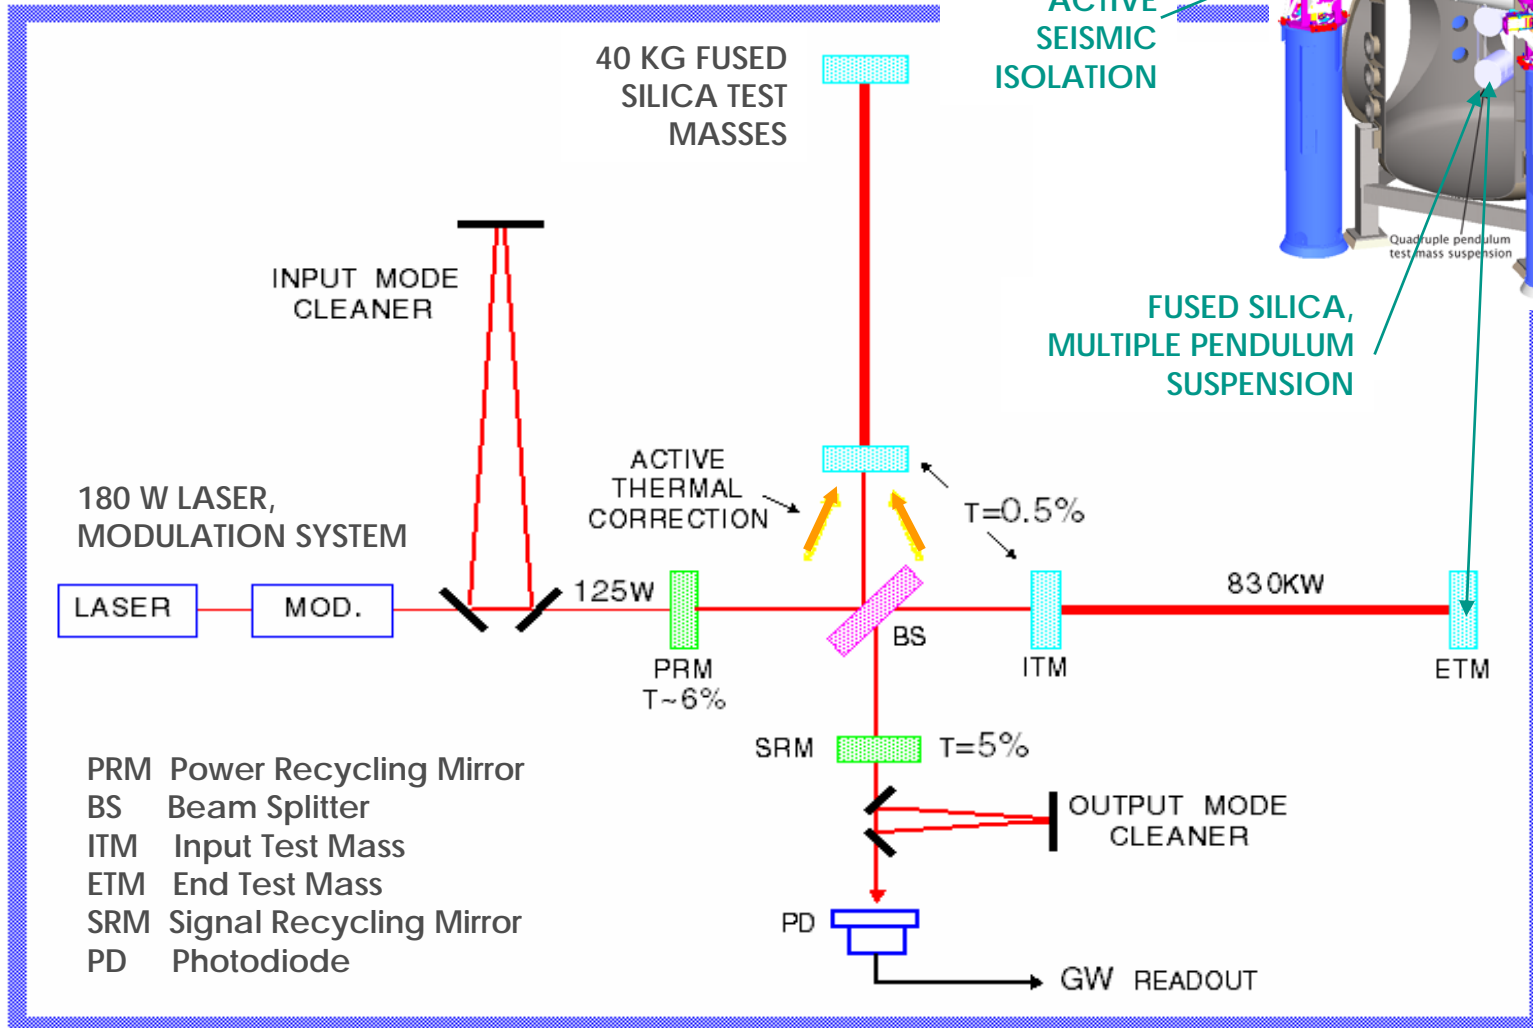

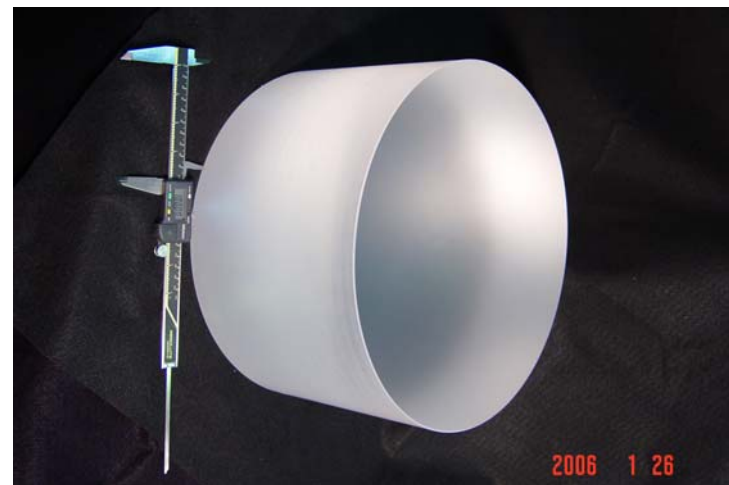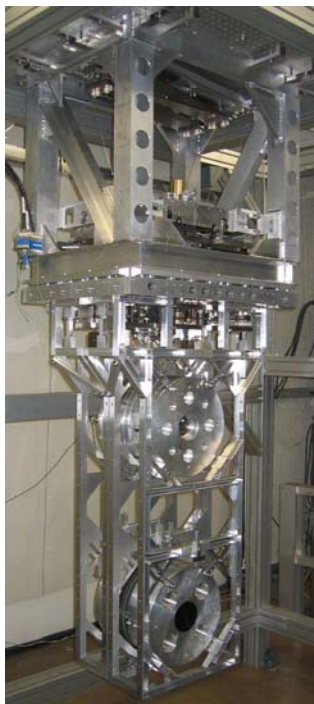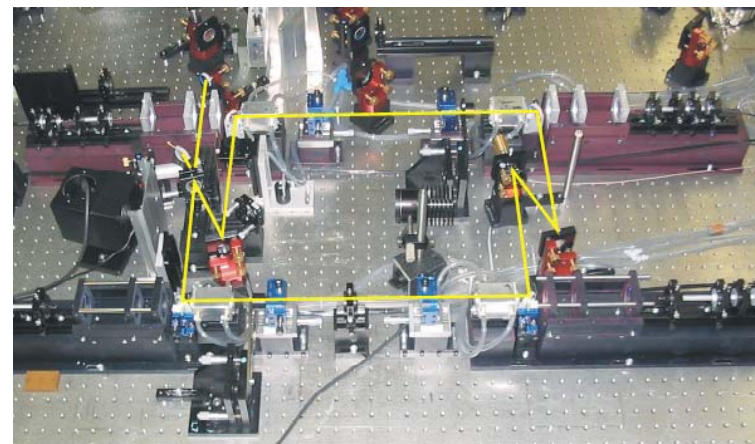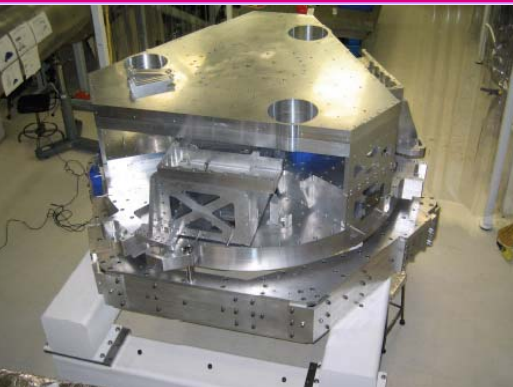

- International team of LIGO Laboratory, Scientific Collaboration scientists
- Supported by the US National Science Foundation, with additional contributions by UK PPARC and German Max Planck Society
- Technical and organizational reviews completed successfully, with National Science Board approval
- Appears in budget planning of NSF and US Government
- Next step: President's budget in February 2007
- On track for a Project start in early 2008
- Decommissioning of initial LIGO in early 2011
- First Advanced LIGO instruments starting up in 2013
- Hoping, and planning, on parallel developments in other 'advanced' instruments to help form the second generation Network

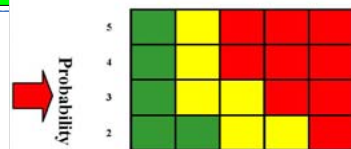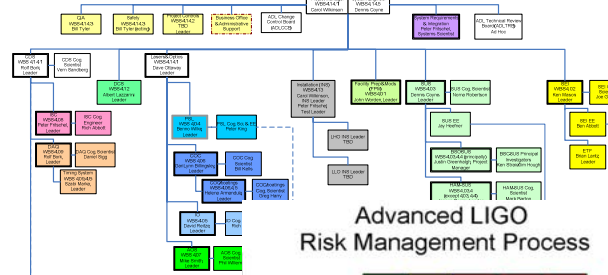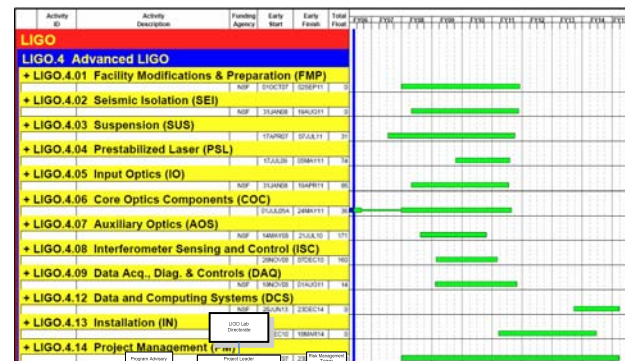

Activity ID	Activity Description	Start	End	Early Start	Early Finish	Total Start	Total Finish
LIGO.4.01.01	Site Preparation	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.01.02	Site Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.01.03	Site Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.02.01	Seismic Isolation System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.02.02	Seismic Isolation System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.02.03	Seismic Isolation System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.03.01	Suspension System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.03.02	Suspension System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.03.03	Suspension System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.04.01	Prestabilized Laser System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.04.02	Prestabilized Laser System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.04.03	Prestabilized Laser System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.05.01	Input Optics System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.05.02	Input Optics System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.05.03	Input Optics System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.06.01	Core Optics Components Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.06.02	Core Optics Components Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.06.03	Core Optics Components Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.07.01	Auxiliary Optics System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.07.02	Auxiliary Optics System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.07.03	Auxiliary Optics System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.08.01	Interferometer Sensing and Control System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.08.02	Interferometer Sensing and Control System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.08.03	Interferometer Sensing and Control System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.09.01	Data Acquisition, Diagnostics & Controls System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.09.02	Data Acquisition, Diagnostics & Controls System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.09.03	Data Acquisition, Diagnostics & Controls System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.12.01	Data and Computing Systems Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.12.02	Data and Computing Systems Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.12.03	Data and Computing Systems Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.13.01	Installation System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.13.02	Installation System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.13.03	Installation System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.14.01	Project Management System Design	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.14.02	Project Management System Construction	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31
LIGO.4.14.03	Project Management System Commissioning	2007-01-01	2007-12-31	2007-01-01	2007-12-31	2007-01-01	2007-12-31

- LIGO – the Lab, the Collaboration, and the instruments – are in full swing
- Sensitivity (along with data quality, duty cycle, and duration) is such that detections are plausible – some reasonable hope that the next LIGO MG presentation will include this ‘little step forward’
- Steps forward in sensitivity are planned which should move us from novelty detection to astrophysical tool
- A network of instruments is growing, allowing the broad physics to be extracted from the detectors, and LIGO is pleased to be an element
- It would be fun to give this presentation to Marcel Grossman!