
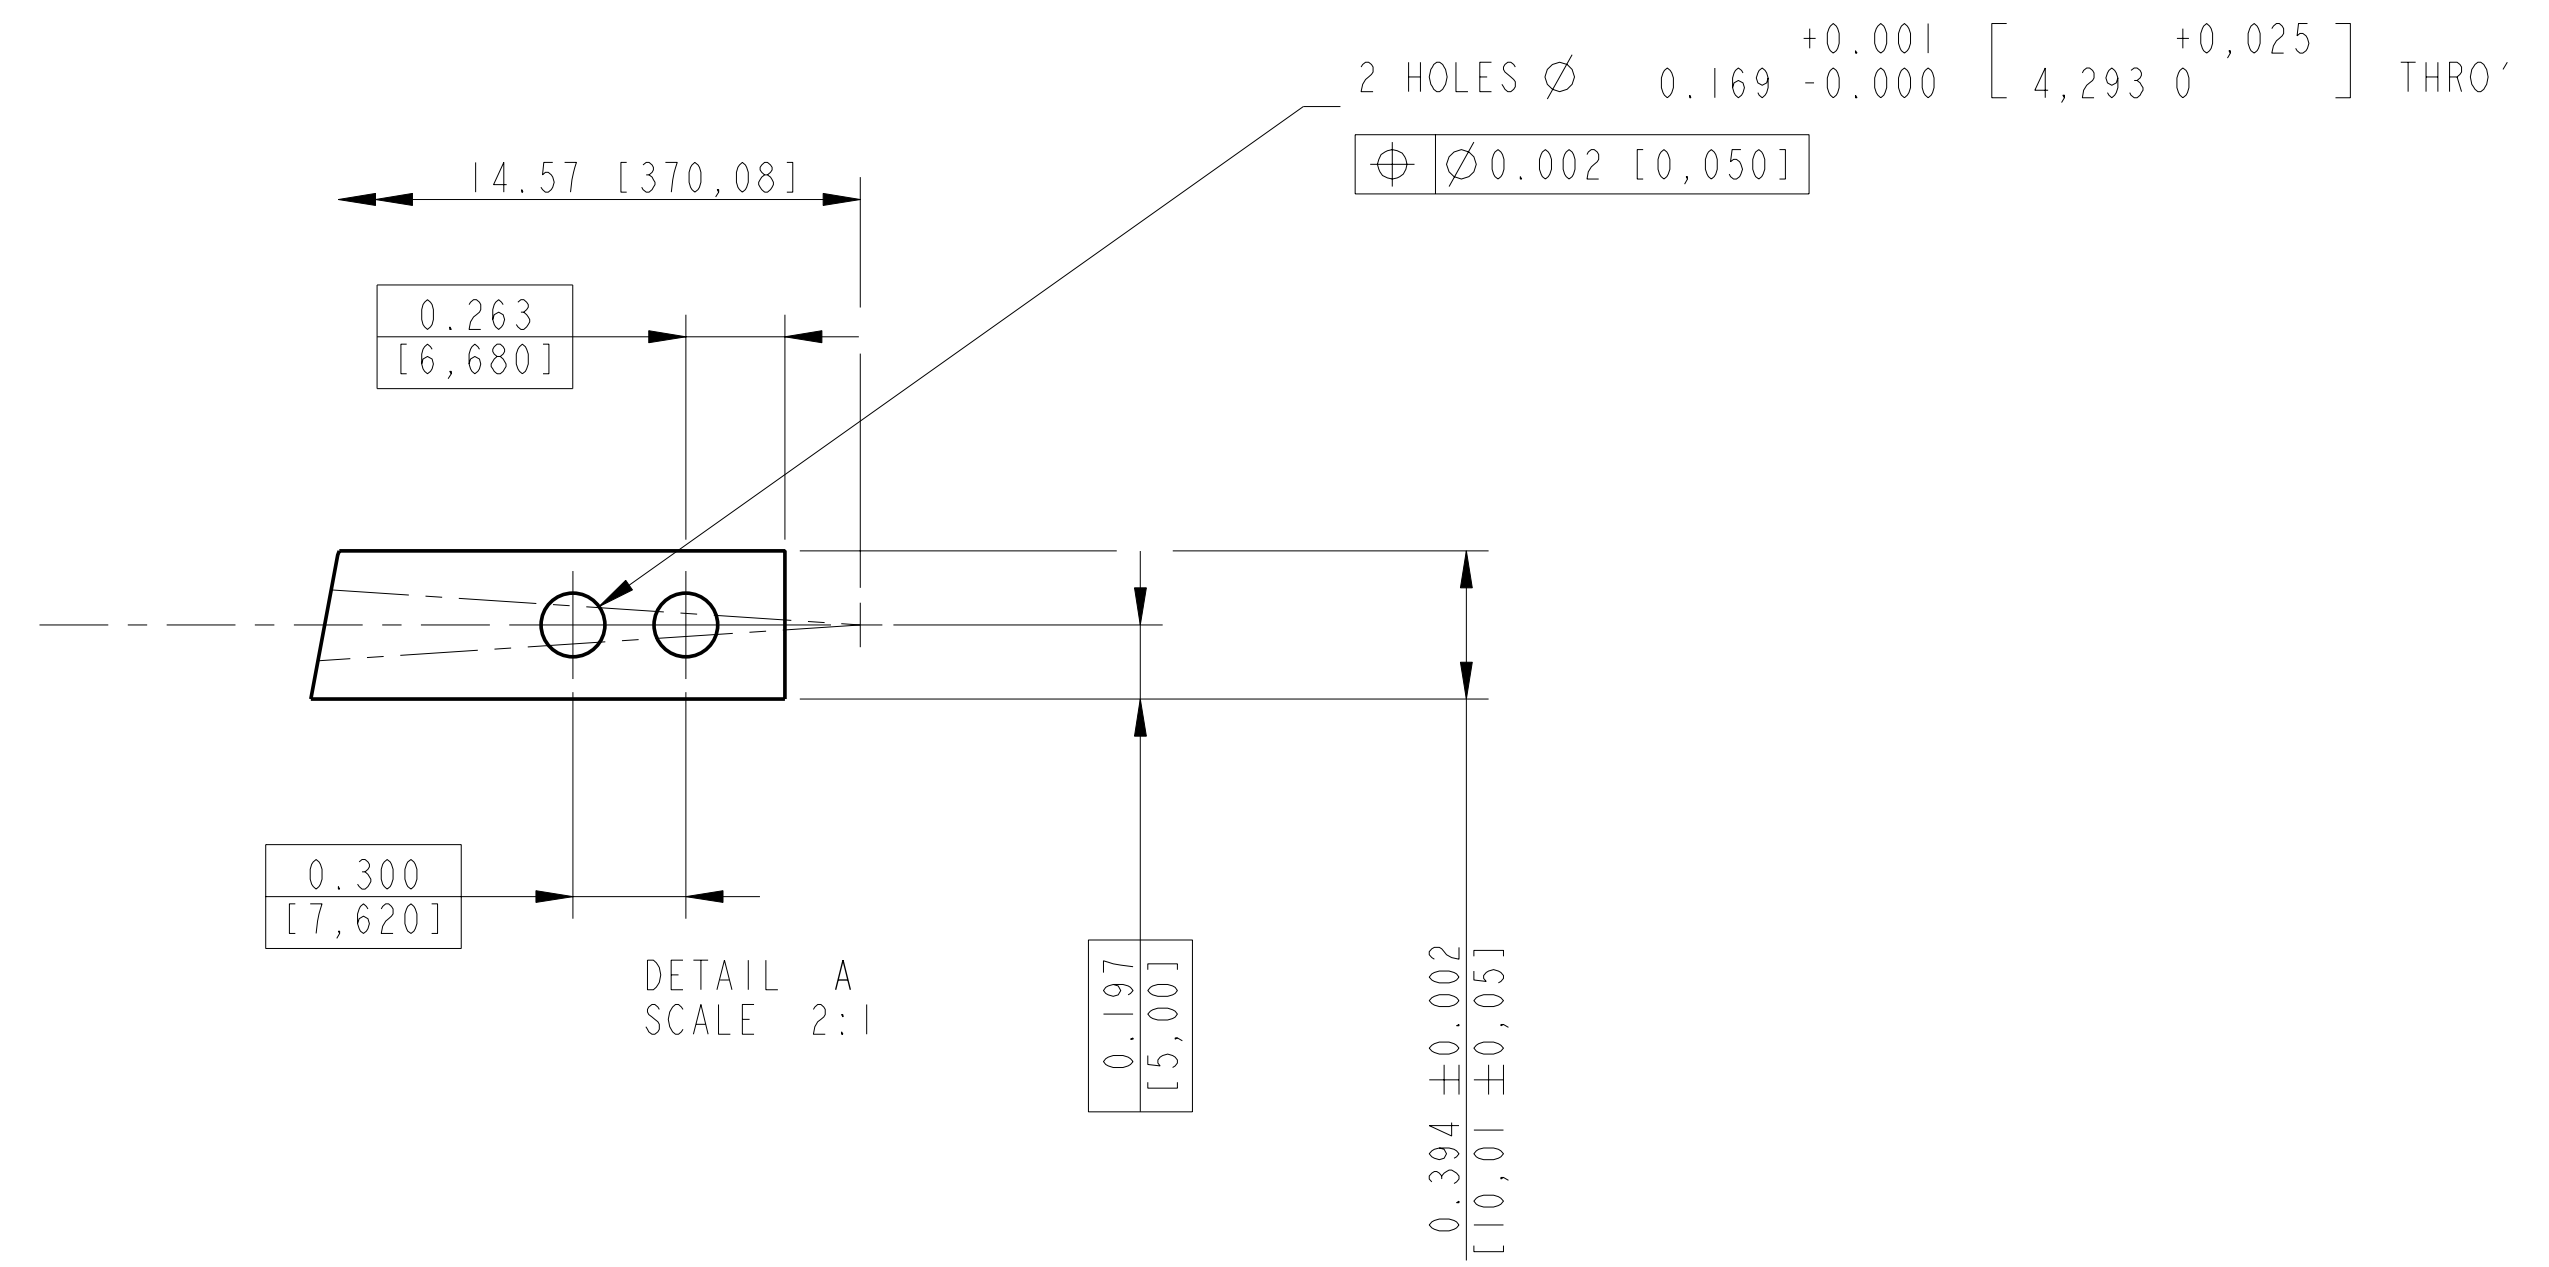


REV.	DATE	DCN #	DRAWING TREE #
A	07/JUL/04	E040312-01-K	
B	20/JUL/04	E040345-00-K	

### FLAT PROFILE

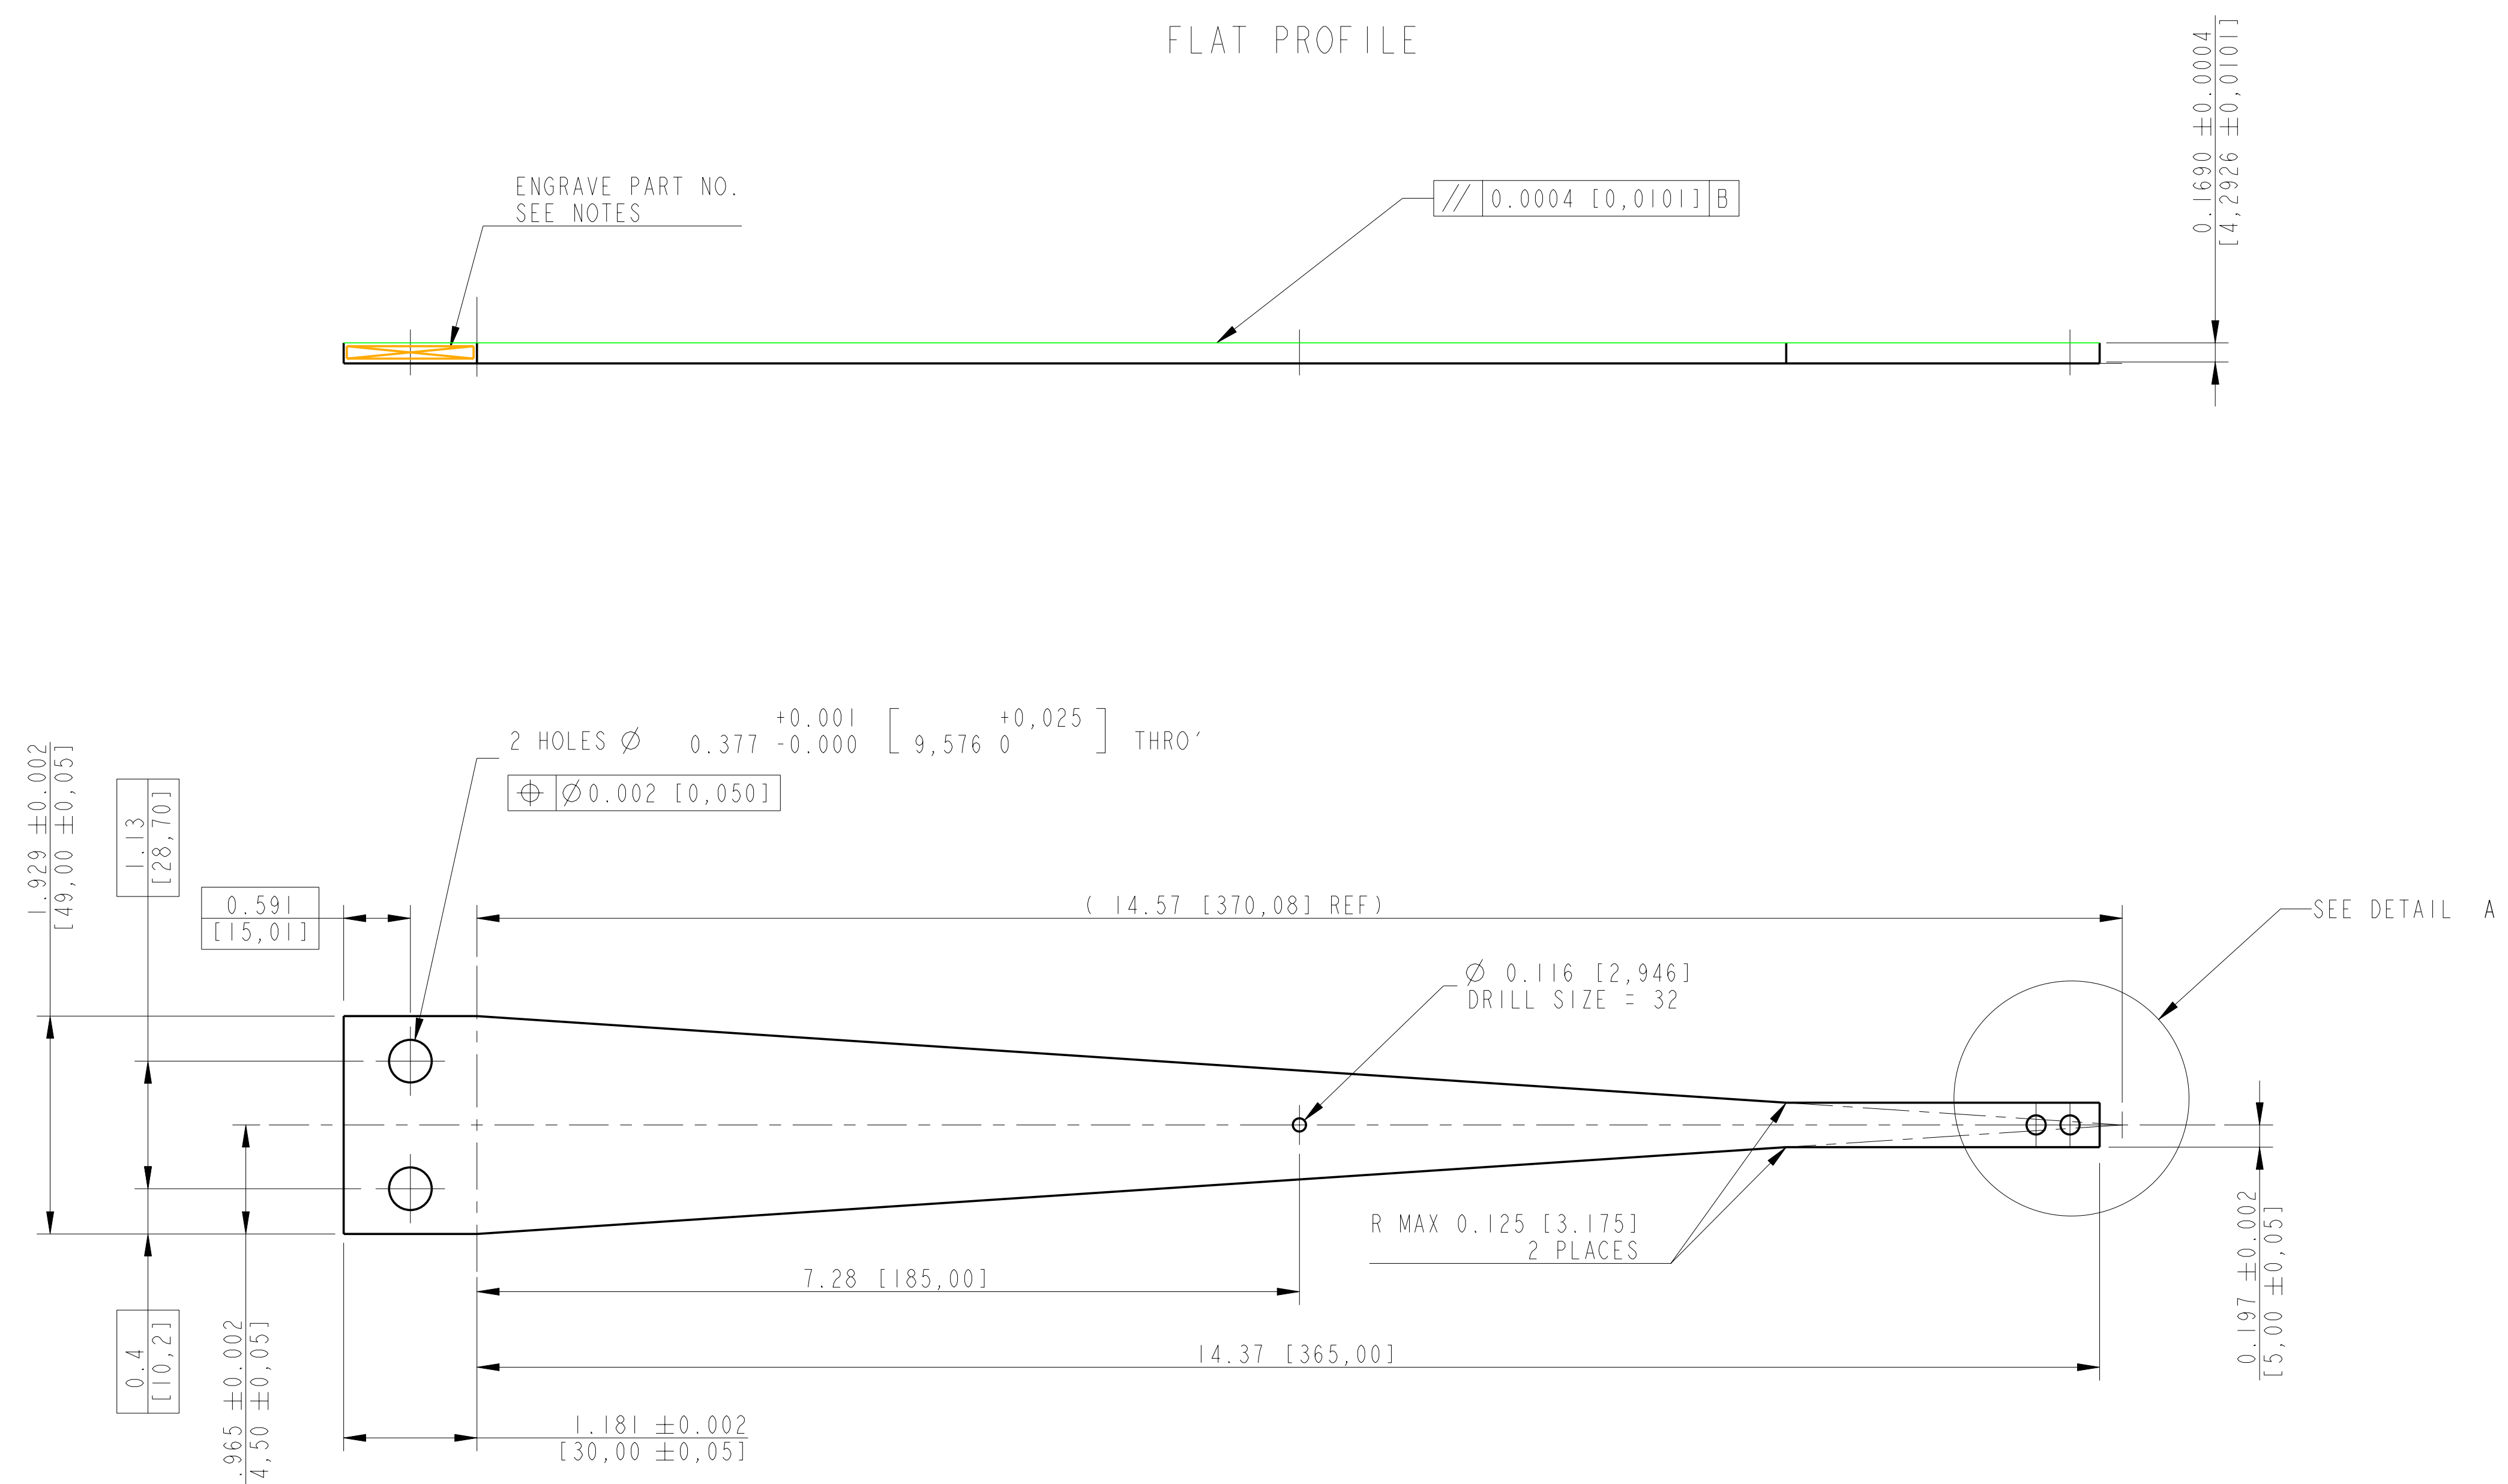

NOTES: (UNLESS OTHERWISE SPECIFIED)

- DO NOT SCALE FROM DRAWING.
- INTERPRET DIMENSIONS PER: ANSI Y14.5 1982
- ALL MACHINING FLUIDS SHALL BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE AND SILICONE, SUCH AS CINCINNATI MILACON'S CIMTECH 410 (STAINLESS STEEL).
- FABRICATE FROM SHEET MATERIAL. FORM RADIUS BY ROLLING.
- REMOVE ALL SHARP EDGES. R 0.02 MIN.
- SCRIBE, ENGRAVE OR STAMP DRAWING PART NUMBER ON NOTED SURFACE OF PART AND A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST PART AND PROCEED CONSECUTIVELY. USE "01" HIGH CHARACTERS. EXAMPLE: 0001001-01. A VISEGRATORY TOOL MAY BE USED.
- AFTER PARTS ARE ROLLED TO RADIUS, HARDEN FOR HEAT TREATMENT AT 435 DEG C FOR 100 HOURS AND AIR COOL. PARTS MUST BE SUPPORTED WITH TOOLING DURING HEAT TREATMENT TO AVOID RADIUS CHANGE DUE TO SELF WEIGHT. TOOLING FOR HEAT TREATMENT MAY BE A "SHAKE BACK" TYPE OF TOOL THAT WILL ALLOW THE PARTS TO BE MOUNTED ON THEIR SIDES. PARTS MAY BE ROLLED AGAIN AFTER HEAT TREATMENT TO ADJUST RADIUS TO SPECIFICATION.

DIMENSIONS ARE IN INCHES (mm)

X.XX ±0.01 (0.250 mm)

X.XXX ±0.005

ANGULAR ±0.250 °

MATERIAL: MARAGING STEEL 250

FINISH: CLEAN AND DEGREASED

√(µin Ra) Ra = 32 (0.8)

NAME	DATE
DRAWN	1 MILMOT 20/JUL/04
CHECKED	...
APPROVED	...

SCALE: 1:1 PROJECTION:



CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY IGR, GLASSBORO UNIVERSITY GEO 600 GROUP METHUEN/FORD APPLETON LABORATORIES	SYSTEM: <b>ADVANCED LIGO</b>
	SUB-SYSTEM: <b>SUS</b>
	NEXT ASSY: <b>UPPER INTERMEDIATE MASS</b>
	PART NAME: <b>BOTTOM BLADE SPRINGS</b>
	<b>QUAD CONTROLS PROTOTYPE</b>
	DRG. NO.: <b>D040296</b>
	SHEET: <b>B</b>

FOR INTERNAL USE ONLY:

E=186Gpa  
 ALPHA=1.35  
 TOTAL SUSP MASS = 39 KG  
 P MASS = 19.2 KG  
 PREDICTED:  
 F = 1.804Hz  
 1st INTERNAL MODE = 115.5Hz  
 σ MAX = 983MPa  
 REF: COMMUNICATION WITH BLADE COMMITTEE

+0.10  
 1.18 -0.00  
 [ 30,00 0 ]

# FORMED BLADE SPRING

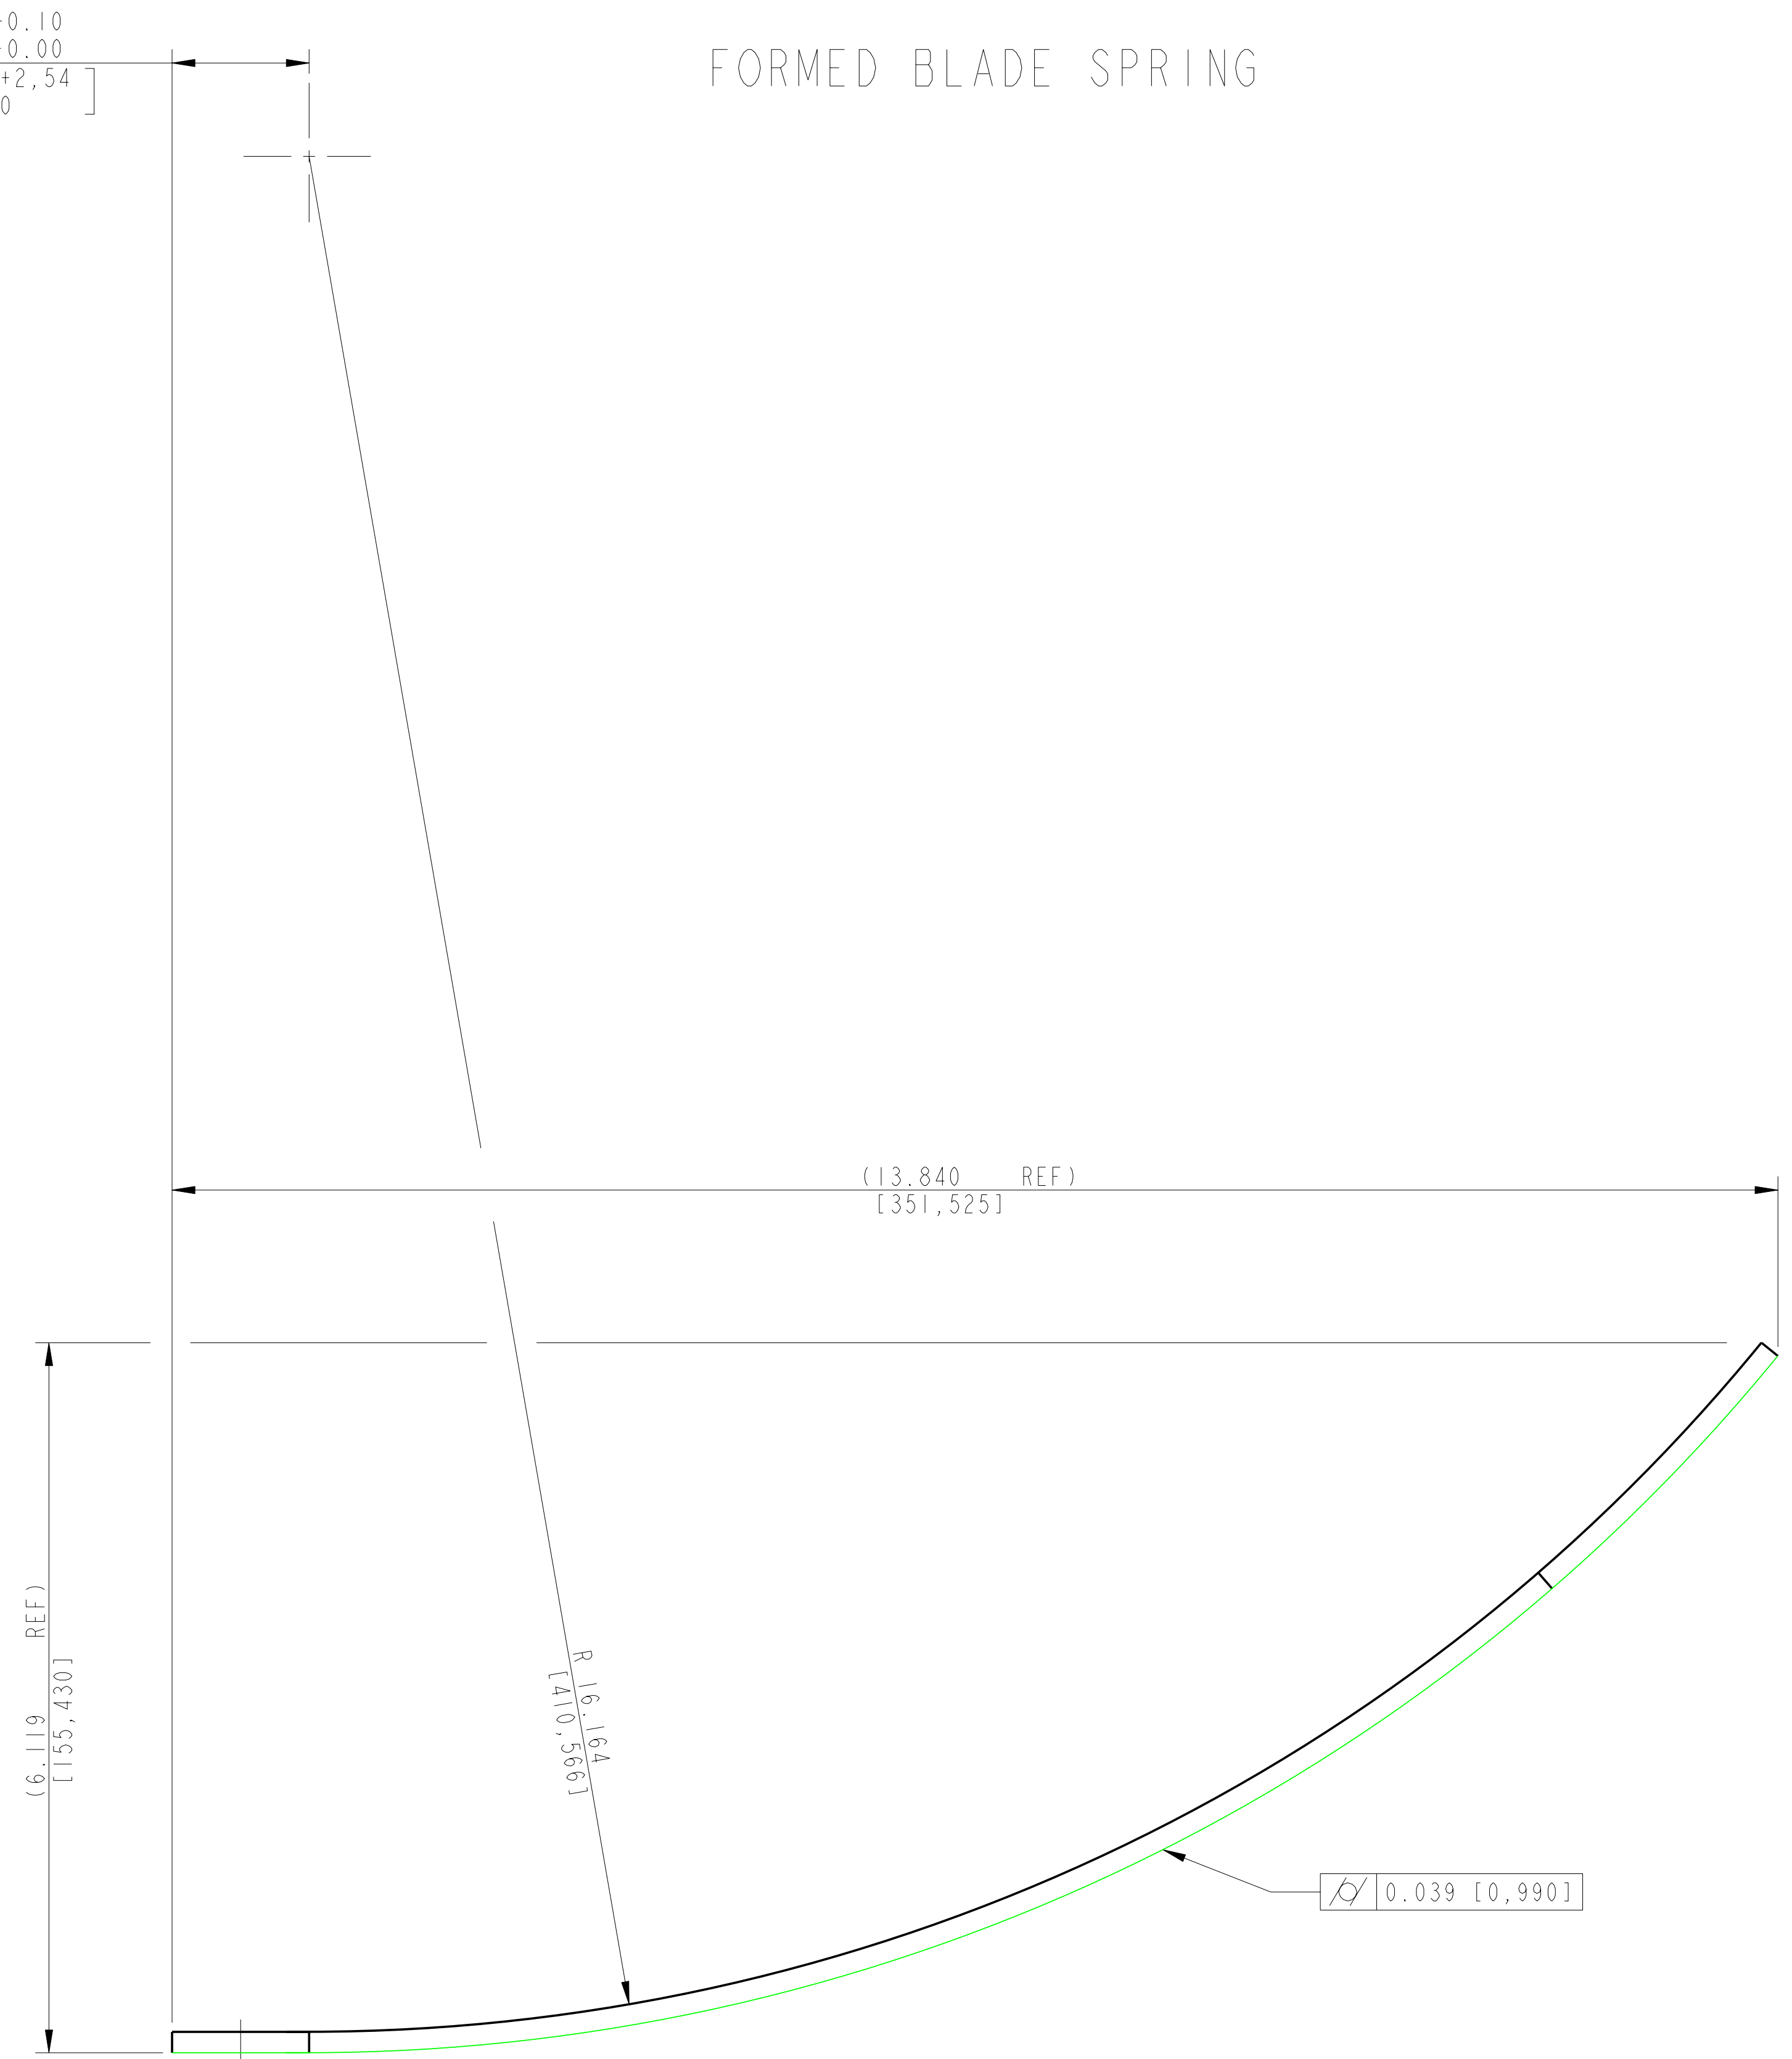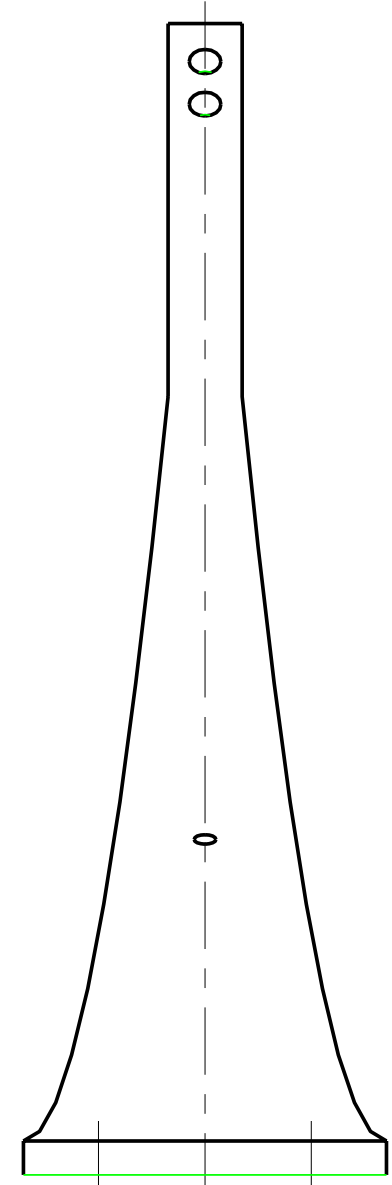

NOTES: (UNLESS OTHERWISE SPECIFIED)		DIMENSIONS ARE IN INCHES (mm)		CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY IGR, GLASSBORO UNIVERSITY GEO 600 GROUP WORTHINGTON APPLETON LABORATORIES		
1. DO NOT SCALE FROM DRAWING.	2. INTERPRET DIMENSIONS PER: ANSI Y14.5 1982	X.XX ±0.01 (0.250 mm)	X.XXX ±0.005	SYSTEM	ADVANCED LIGO	
3. ALL MACHINING FLUIDS SHALL BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE AND SILICONE, SUCH AS CINCINNATI MILACON'S CIMTECH 410 (STAINLESS STEEL).	4. FABRICATE FROM SHEET MATERIAL. FORM RADIUS BY ROLLING.	MATERIAL: MARAGING STEEL 250	ANGULAR ±0.250 °	SUB-SYSTEM	SUS	
5. REMOVE ALL SHARP EDGES. 0.02 MIN.	6. SCRIBE, ENGRAVE OR STAMP DRAWING PART NUMBER ON NOTED SURFACE OF PART AND A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST PART AND PROCEED CONSECUTIVELY. USE 01" HIGH CHARACTERS.	FINISH: CLEAN AND DEGREASED	√(1/16) (1/16) Ra = 32 (0.8)	NEXT ASSY	UPPER INTERMEDIATE MASS	
7. AFTER PARTS ARE ROLLED TO RADIUS, HARDEN FOR HEAT TREATMENT AT 435 DEG C FOR 100 HOURS AND AIR COOL. PARTS MUST BE SUPPORTED WITH TOOLING DURING HEAT TREATMENT TO AVOID RADIUS CHANGE DUE TO SELF WEIGHT. TOOLING FOR HEAT TREATMENT MAY BE A "SHAKE BACK" TYPE OF TOOL THAT WILL ALLOW THE PARTS TO BE MOUNTED ON THEIR SIDES. PARTS MAY BE ROLLED AGAIN AFTER HEAT TREATMENT TO ADJUST RADIUS TO SPECIFICATION.		DRAWN	J. MILMOT	20/JUL/04	PART NAME	BOTTOM BLADE SPRINGS
		CHECKED			DRG. NO.	QUAD CONTROLS PROTOTYPE
		APPROVED			SCALE	1:1 PROJECTION
					DATE	
					REV	
					NO.	D040296
					SHEET	2 OF 2