

8 7 6 5 4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

D



D

C

C

B

B

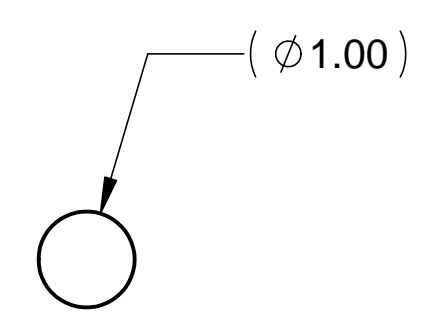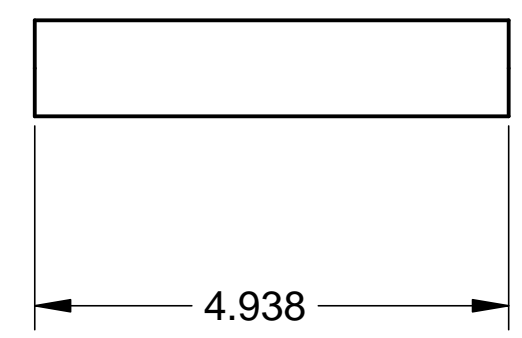

MATL: Ø1.0 BARSTOCK 6061-T6 ALUM.

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
2. DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994
3. SURFACE TEXTURE PER ANSI/ASME B 46.1-1985
4. REMOVE ALL BURRS AND BREAK SHARP EDGES TO A MAXIMUM OF .015
5. ALL INSIDE CORNERS TO BE .015 RADIUS MAX
6. COUNTERSINK 82 DEGREES ALL TAPPED HOLES TO MAJOR DIAMETER
7. COUNTERSINK 82 DEGREES APPROXIMATELY .015 DEEP ALL DRILLED HOLES
8. PART NUMBER (DRAWING NO. PLUS DASH NO. PLUS SERIAL NO.) TO BE CLEARLY MARKED ON THE PART ITSELF
9. NO SULFUR BASED CUTTING FLUIDS ALLOWED. APPROVED MACHINE LUBRICANT: ALUMICUT, MISTIC METAL MOVER, PRINCETON, IL.
10. PART WEIGHS .4 Lbs.

PARTS LIST

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES -TOLERANCES- DECIMALS ANGULAR = +/- .30' .XX = +/- .03 SURFACE FINISH = 250 .XXX = +/- .010	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE DO NOT SCALE DRAWING		<i>HYTEC, INC</i> TITLE BSC BELLOWS COMPRESSION CLAMP SPACER
	FINISH	SIGNATURE	
PART NO. D972462-1	DESIGNED	W. K. MILLER	5-8-98
	DRAWN	W. K. MILLER	5-8-98
	CHECKED	HARRY SALAZAR	-
	ENGR.	T. THOMPSON	-
	APPROVED	T. THOMPSON	-
	DWG. NO.	D972462	
	SCALE	1/1	REVISION
	SIZE	D	SHEET NO. 1 of 1

A

A

8 7 6 5 4 3 2 1