



#4/0 HIGH TEMPERATURE  
 CABLES TO STAINLESS STEEL  
 TUBE STIFFENING RING  
 VIA SUB-ASSEMBLY D-1

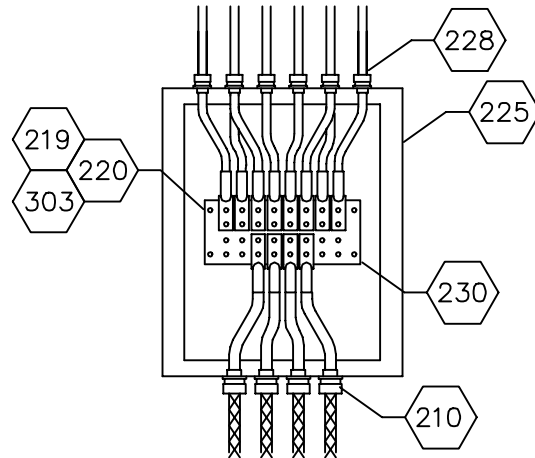

TYPE W DC  
 500 kCMIL  
 SUPPLY CABLES  
 FROM DC POWER  
 SUPPLY (SEE NOTE)

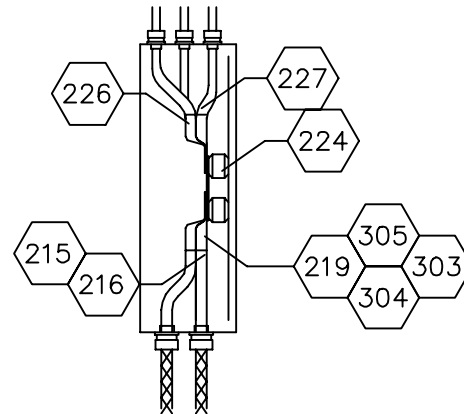

NOTE:

- 1.) ON TUBE ENDS ONLY (4) FOUR SUPPLY CABLES RETURN.  
 AT ALL OTHER LOCATIONS ALL (8) EIGHT DC SUPPLY CABLES RETURN.
- 2.) APPLY TORQUE SEAL TO TERMINAL CONNECTIONS.
- 3.) APPLY CONTACT SEALANT TO CURRENT CARRYING TERMINAL SURFACES.

SCALE: 1/2"=1'0"