


1. CLEAR ANODIZE PER MIL-A-8625

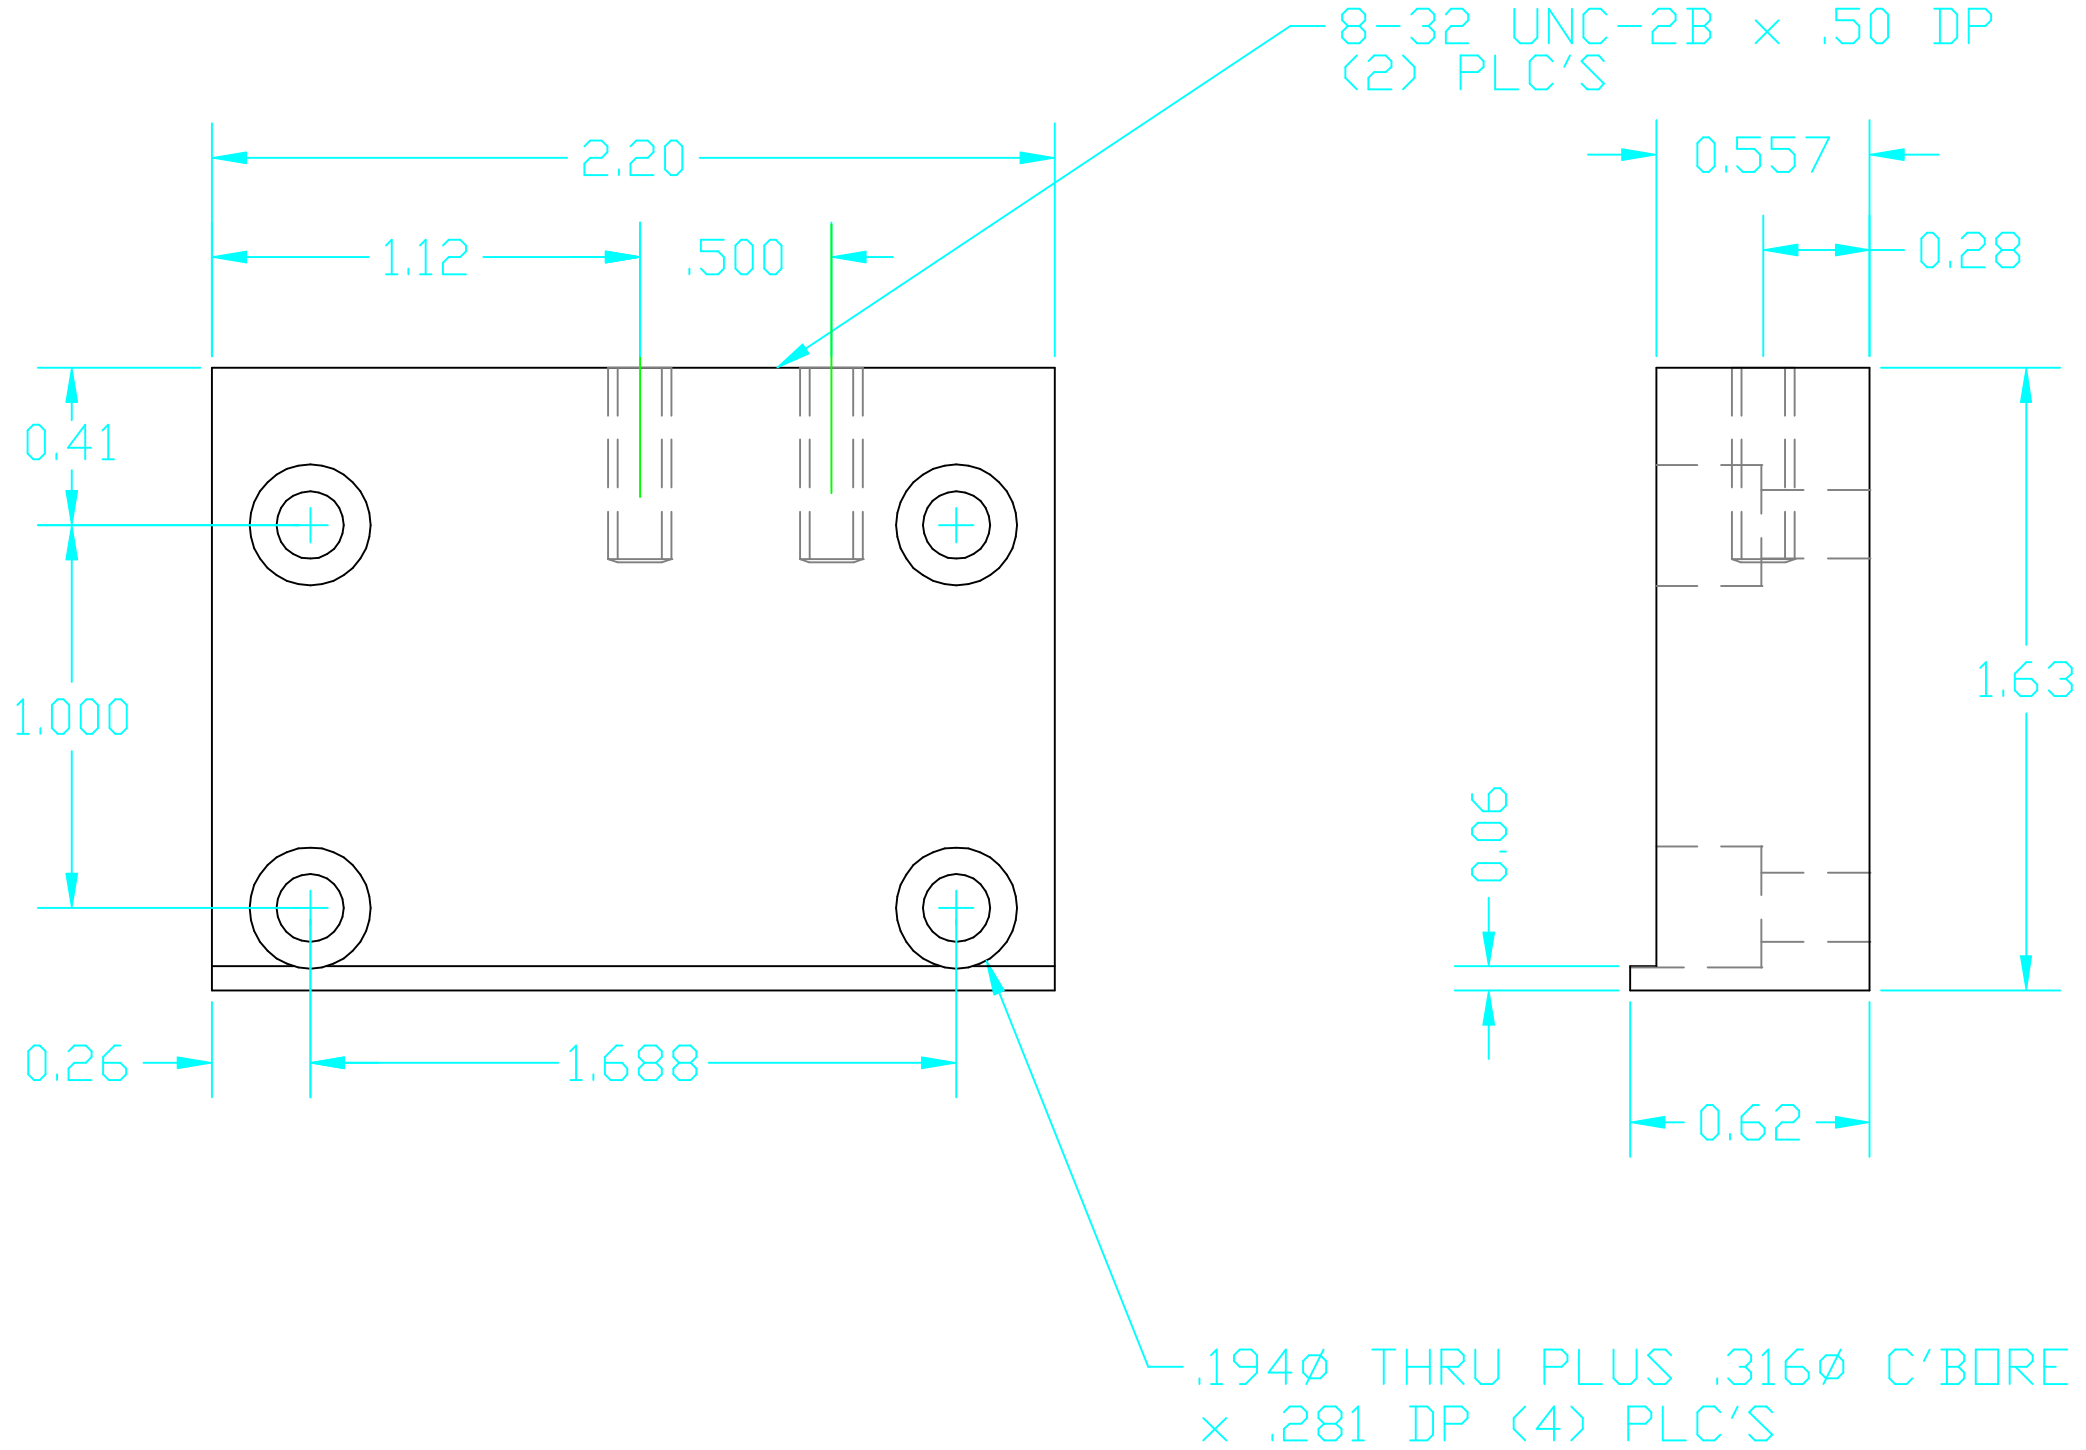

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES:
FRACTIONAL $\pm 1/16(.16)$
ANGULAR $\pm 1^\circ$
TWO PLACE DECIMAL $\pm .01(.025)$
THREE PLACE DECIMAL $\pm .005(.013)$

FINISHED SURFACE RMS 63
BREAK CORNERS IN: OUT: .02
REMOVE ALL BURRS

MATERIAL: 6061-T6 ALUM.
HEAT TREAT: -
FINISH: -

REV	DESCRIPTION	DCC	SYS	DET	CDS	VE	CC	BT	CHECK	DRWN	DATE
A	INITIAL RELEASE									MASIN	3/00
00	PRE-RELEASE									K.MASIN	8/31/98

MIT CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY	
V-BLOCK MOUNT POLARIZER ISC TABLE ASSEMBLY	
CAD FILE D980343-A-D.dwg	SIZE DWG. NO. B D980343-A-D
SCALE 2:1	SHEET 1 OF 1

USED ON: D980327-A-D
NEXT ASS'Y: -

