
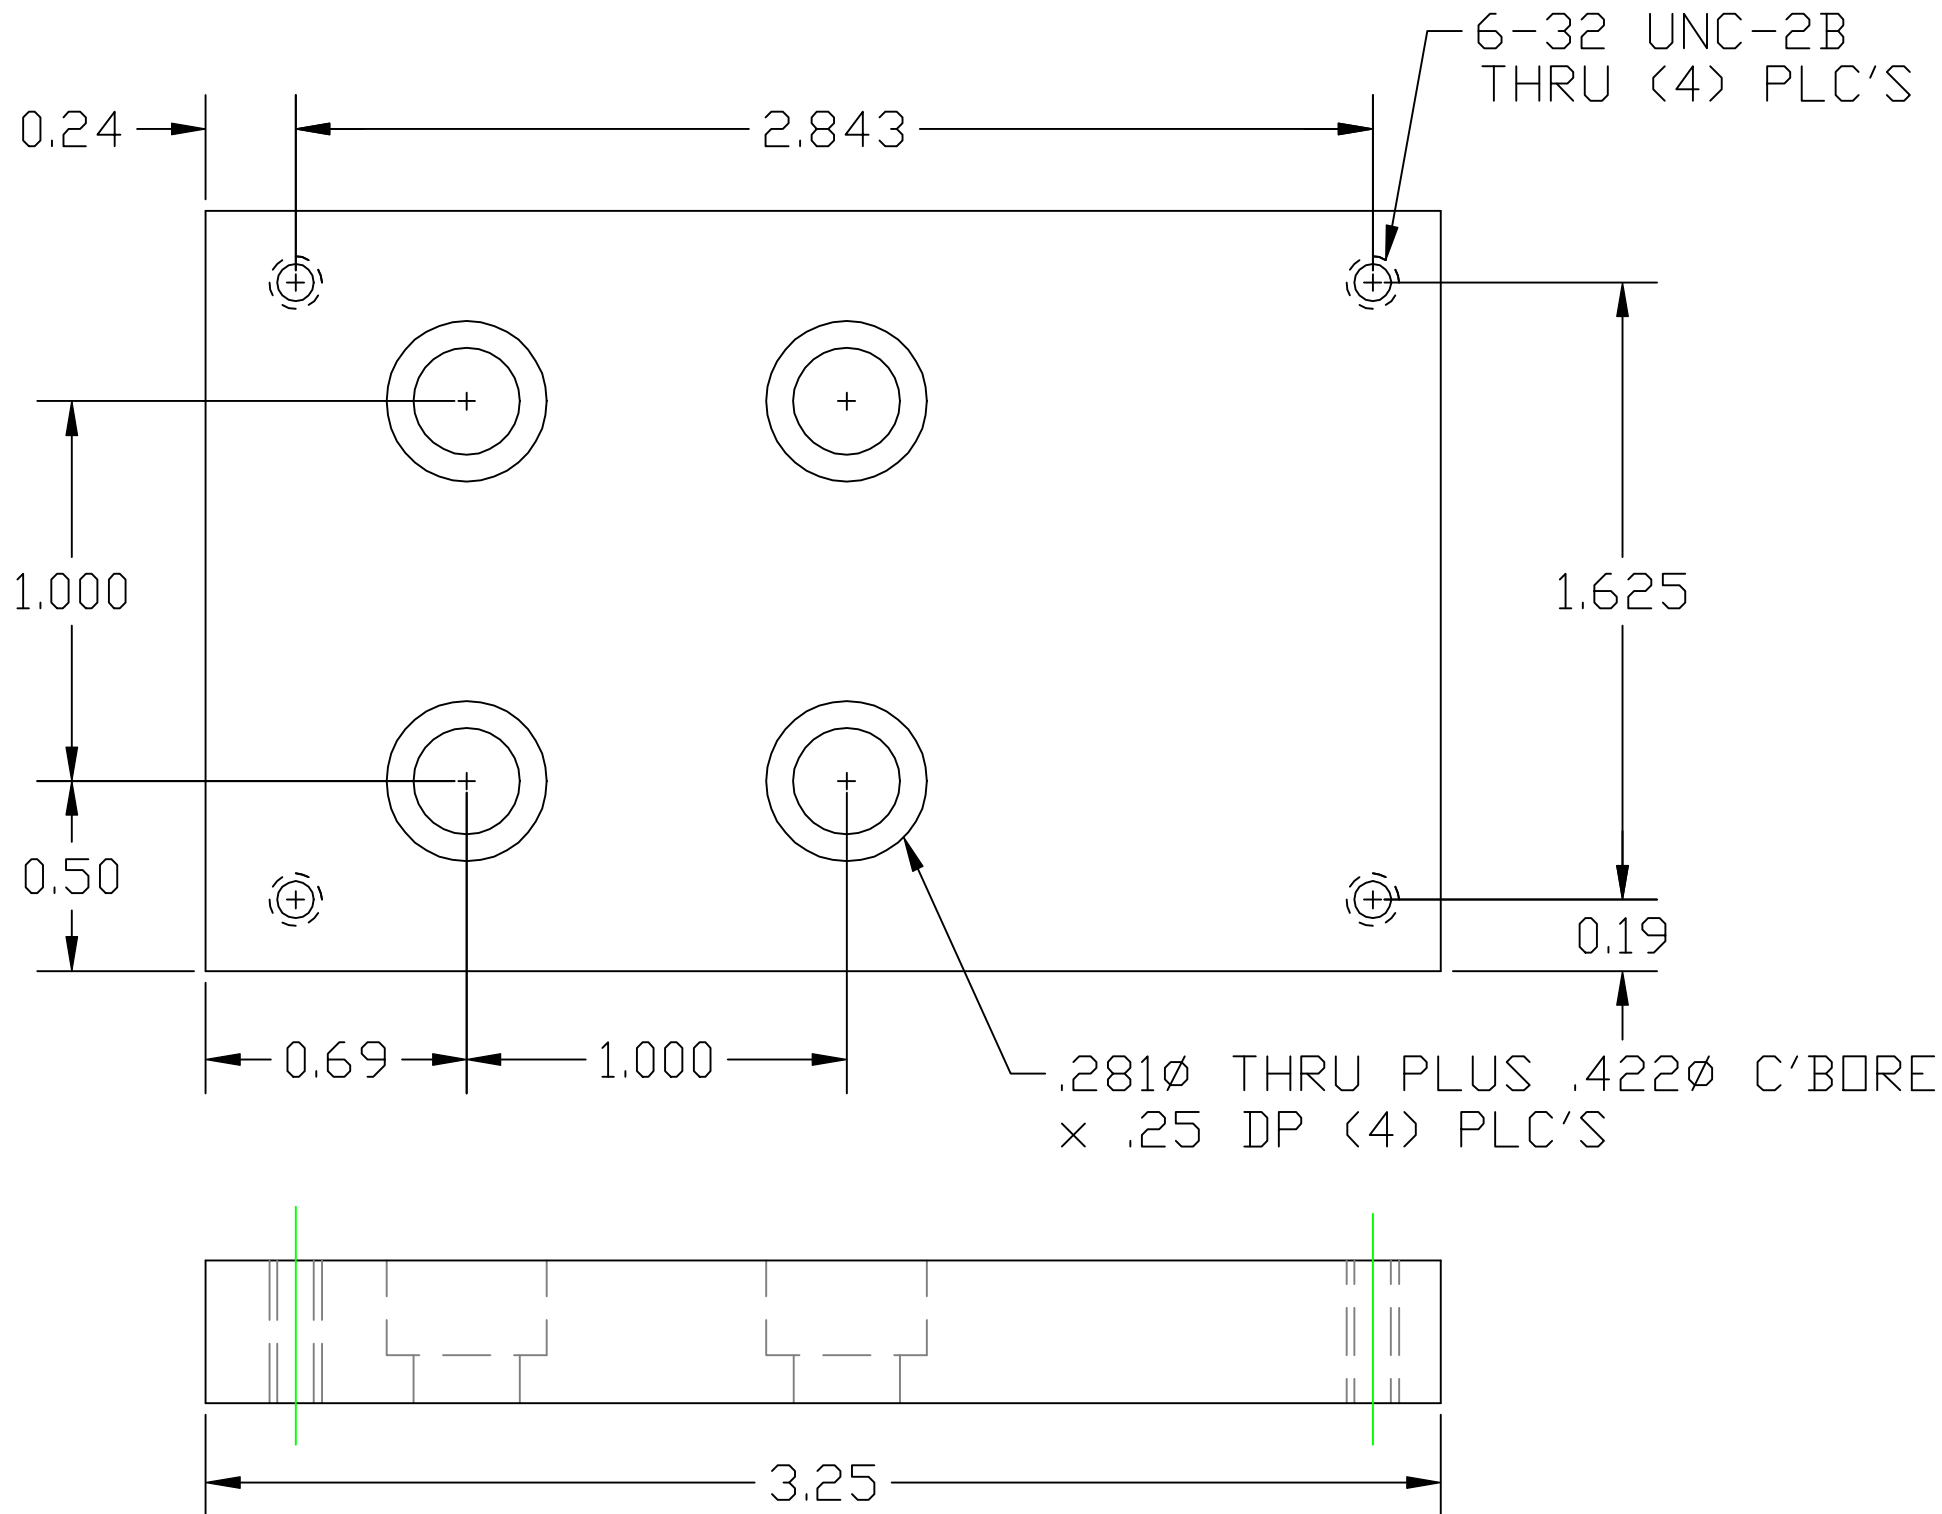


NOTES:

1. CLEAR ANODIZE PER MIL-A-8625

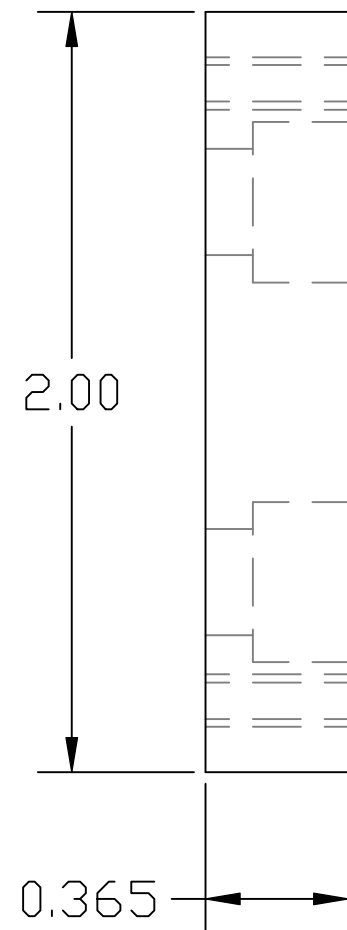

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

| | | |
|---|------------------|-----------------------|
| TOLERANCES: FRACTIONAL ±1/16(.16) ANGULAR ± 1° TWO PLACE DECIMAL ±.01(.025) THREE PLACE DECIMAL ±.005(.013) | HEAT TREAT: - | FINISH: SEE NOTE 1 |
| MATERIAL: 6061-T6 ALUM. | | |

FINISHED SURFACE RMS 63
BREAK CORNERS IN: .02
REMOVE ALL BURRS

| REV | DESCRIPTION | DCC | SYS | DET | CDS | VE | CC | BT | CHECK | DRWN | DATE |
|-----|-----------------|-----|-----|-----|-----|----|----|----|-------|---------|---------|
| A | INITIAL RELEASE | | | | | | | | | MASON | 1/10/00 |
| 00 | PRE-RELEASE | | | | | | | | | K.MASON | 9/21/98 |

| | |
|---|--------------------------------|
| CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY | |
| BASE PLATE LASER AUTOCOLLIMATOR MOUNT IAS FIELD STATION | |
| CAD FILE D980411-Adwg | SIZE DWG. NO. B D980411-A-D |
| SCALE 2:1 | SHEET 1 OF 1 |

| DWG. NO. | DESCRIPTION |
|----------|--------------------|
| | REFERENCE DRAWINGS |