


1. CLEAR ANODIZE PER MIL-A-8625

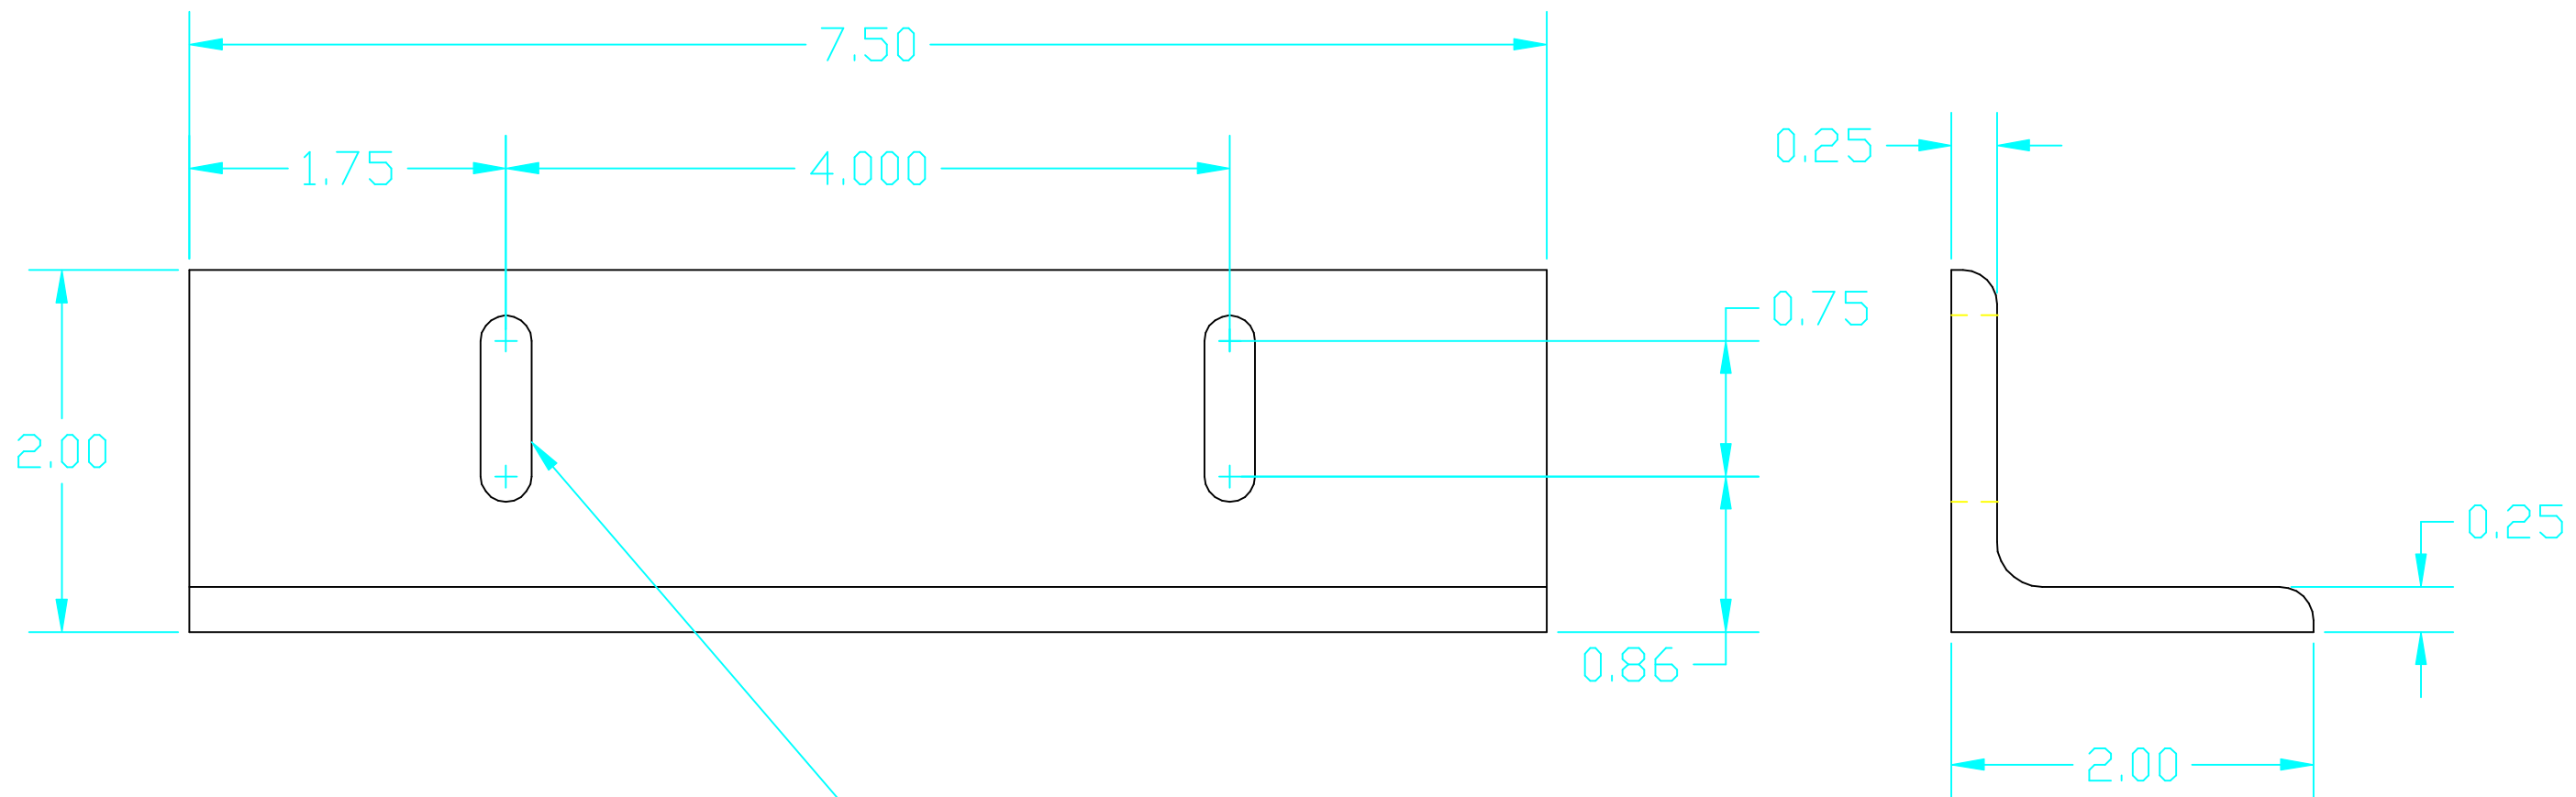

.281 ϕ SLOT THRU (2) PLC'S

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES														MIT CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY				
		TOLERANCES: FRACTIONAL $\pm 1/16(.16)$ ANGULAR $\pm 1^\circ$ TWO PLACE DECIMAL $\pm .01(.025)$ THREE PLACE DECIMAL $\pm .005(.013)$		FINISHED SURFACE RMS 63 BREAK CORNERS IN: OUT: .02 REMOVE ALL BURRS														FEEDTHRU CLAMP ISC TABLE ASSY -		
		MATERIAL: 6061-T6 ALUM.	HEAT TREAT: -	FINISH: SEE NOTE 1	A	INITIAL RELEASE											MASON	3/00		
				00	PRE-RELEASE											K.MASON	11/30/98			
DWG. NO.	DESCRIPTION	USED ON: -	NEXT ASS'Y: -	REV	DESCRIPTION	DCC	SYS	DET	CDS	VE	CC	BT	CHECK	DRWN	DATE	CAD FILE	SCALE	SIZE	DWG. NO.	SHEET
6	REFERENCE DRAWINGS	-	-													D980468-A.dwg	FULL	B	D980468-A-D	1 OF 1