


1. CLEAR ANODIZE PER MIL-A-8625

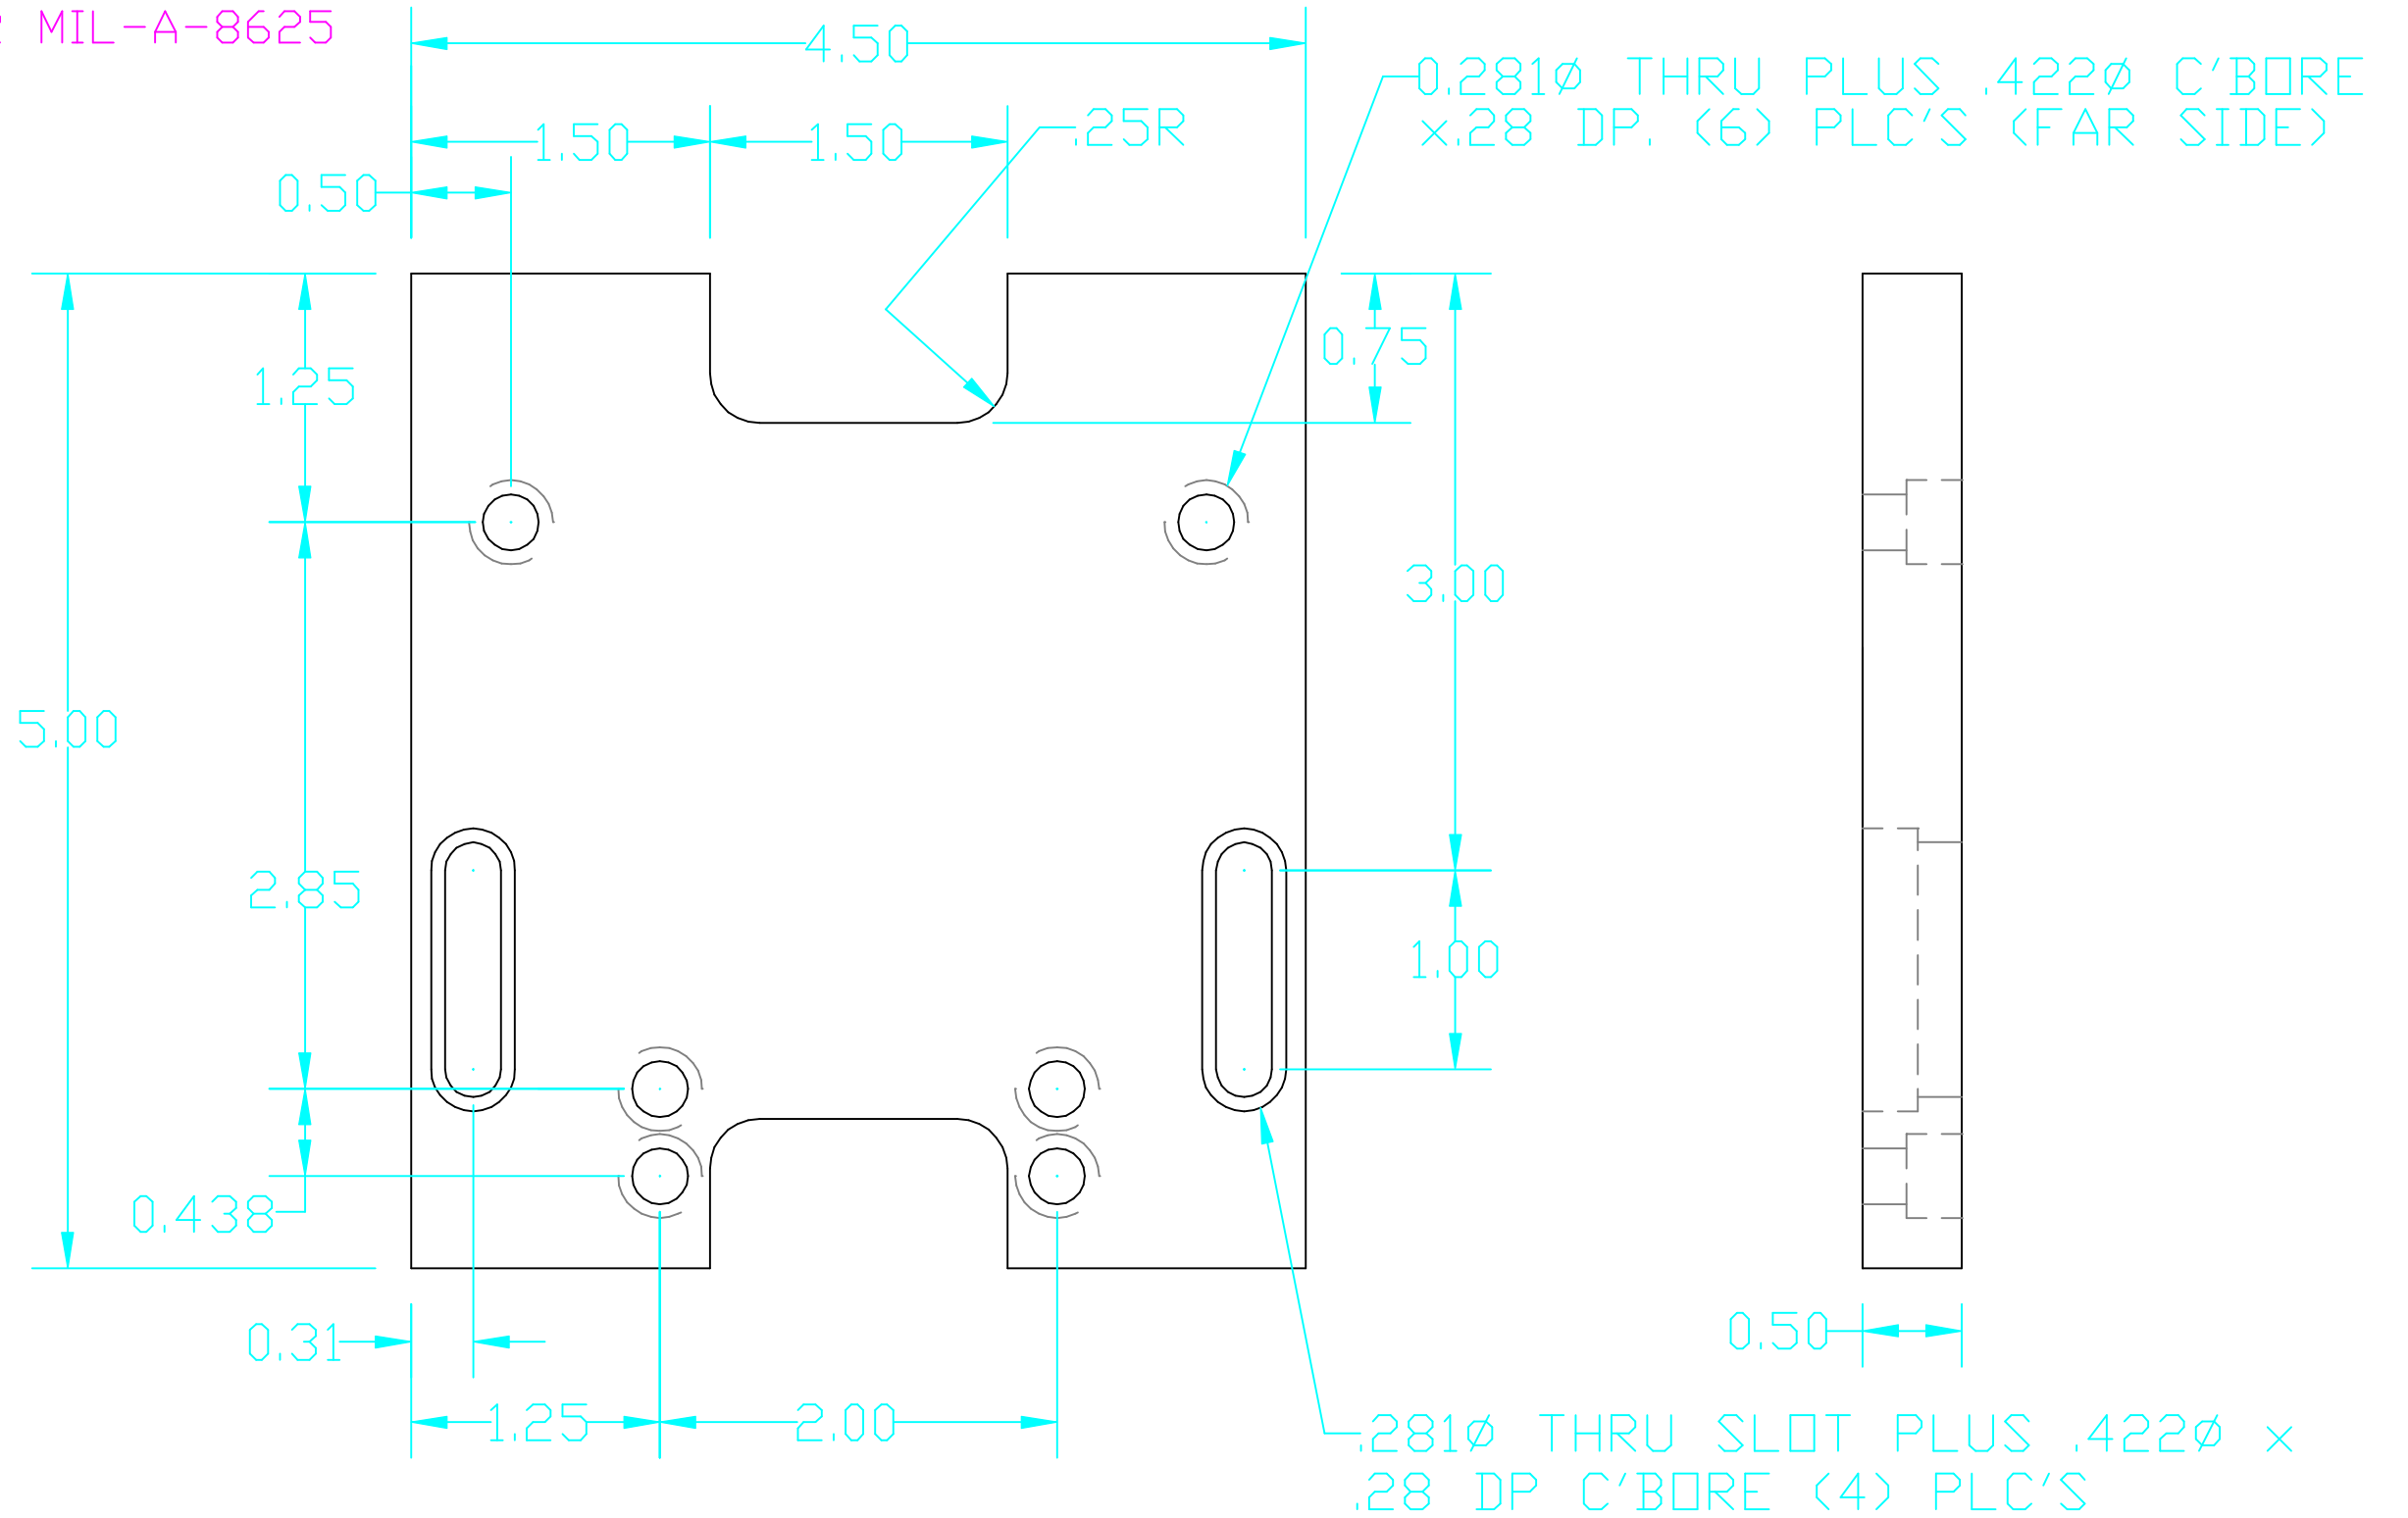

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES														MIT CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY			
		TOLERANCES: FRACTIONAL ±1/16(.16) ANGULAR ± 1° TWO PLACE DECIMAL ±.01(.025) THREE PLACE DECIMAL ±.005(.013)		FINISHED SURFACE RMS 63 BREAK CORNERS IN: .02 REMOVE ALL BURRS														ADJUST PLATE ISC TABLE LSC PHOTODIODE ASSEMBLY	
		MATERIAL:	HEAT TREAT:	FINISH:													MASON 3/00		
		6061-T6 ALUM.	-	-													K.MASON/27/99		
DWG. NO.		DESCRIPTION		REV												SCALE			
6		REFERENCE DRAWINGS		ISSUE DESCRIPTION												D990344-A.dwg			
5		USED ON: D980327-A		NEXT ASS'Y: -												B D990344-A-D			
4																FULL			
3																SHEET 1 OF 1			
2																			
1																			