

6

5

4



3

2


1

1. CLEAR ANODIZE PER MIL-A-8625

NOTES:

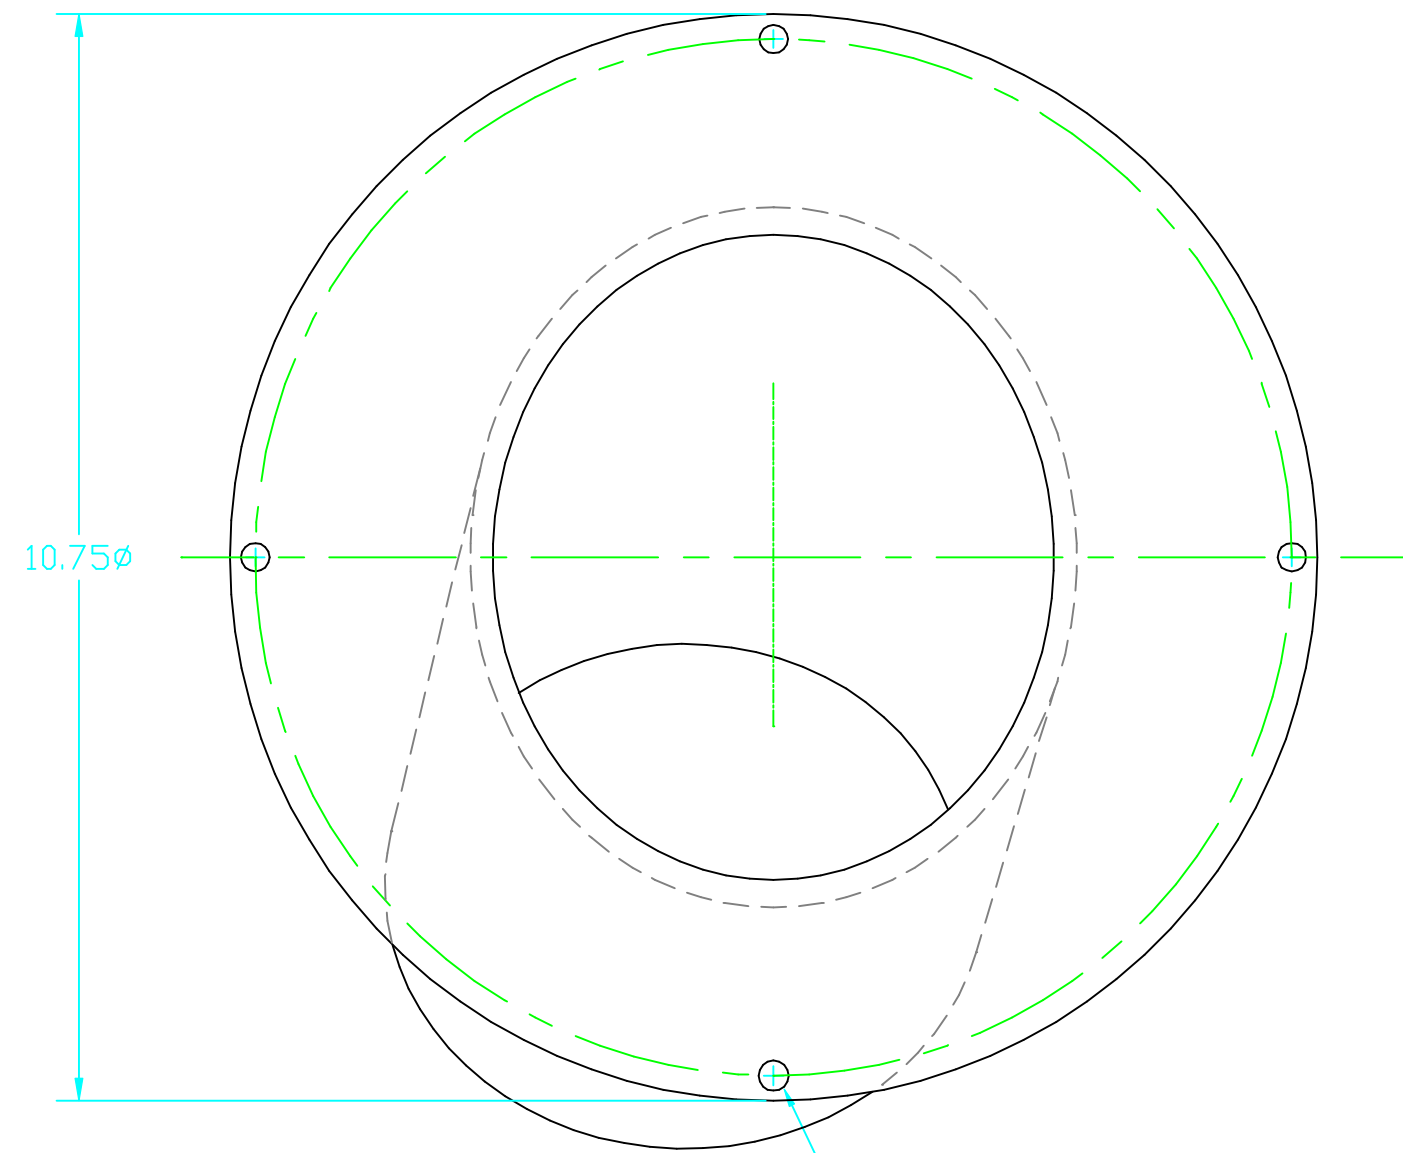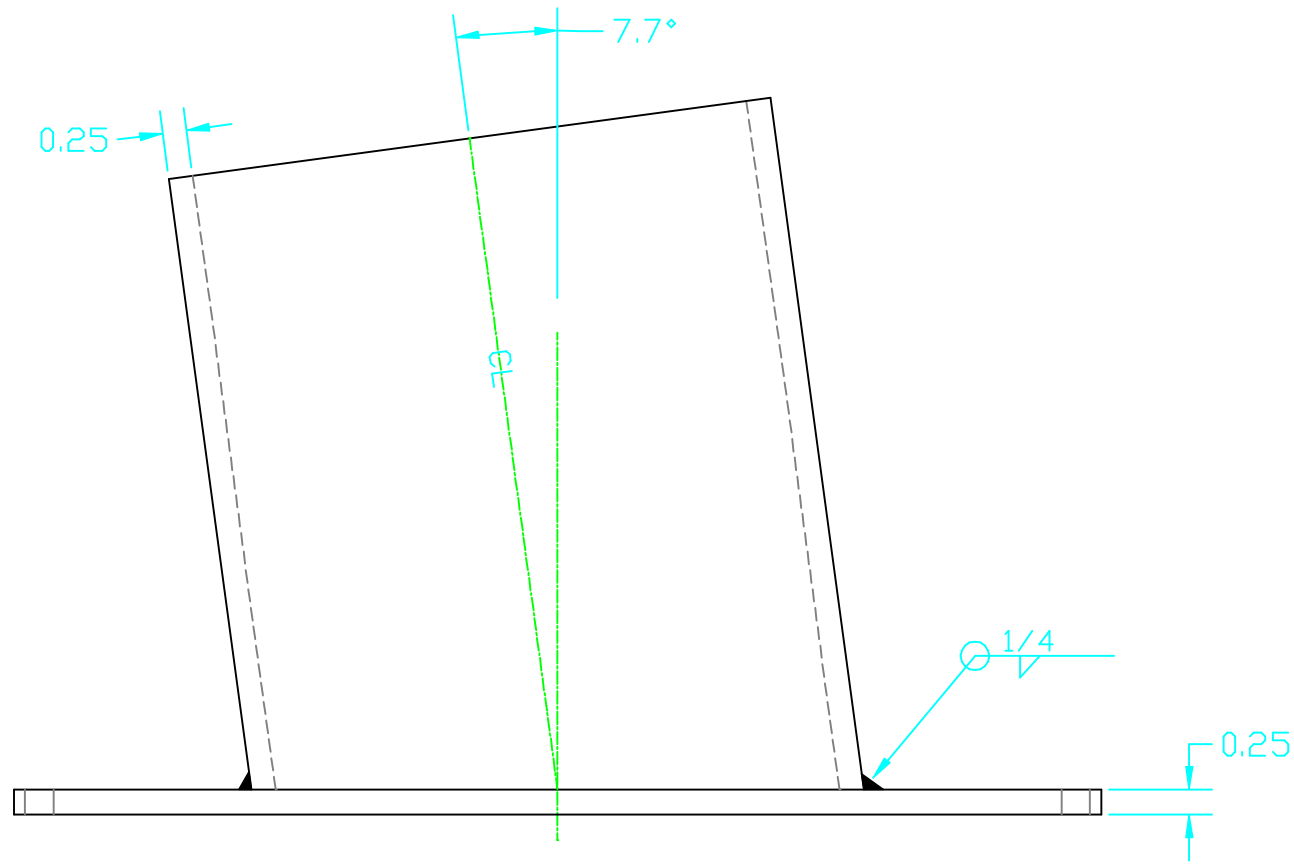

.281Ø THRU (4) HOLES EQ SP ON A
10.250Ø B.C.

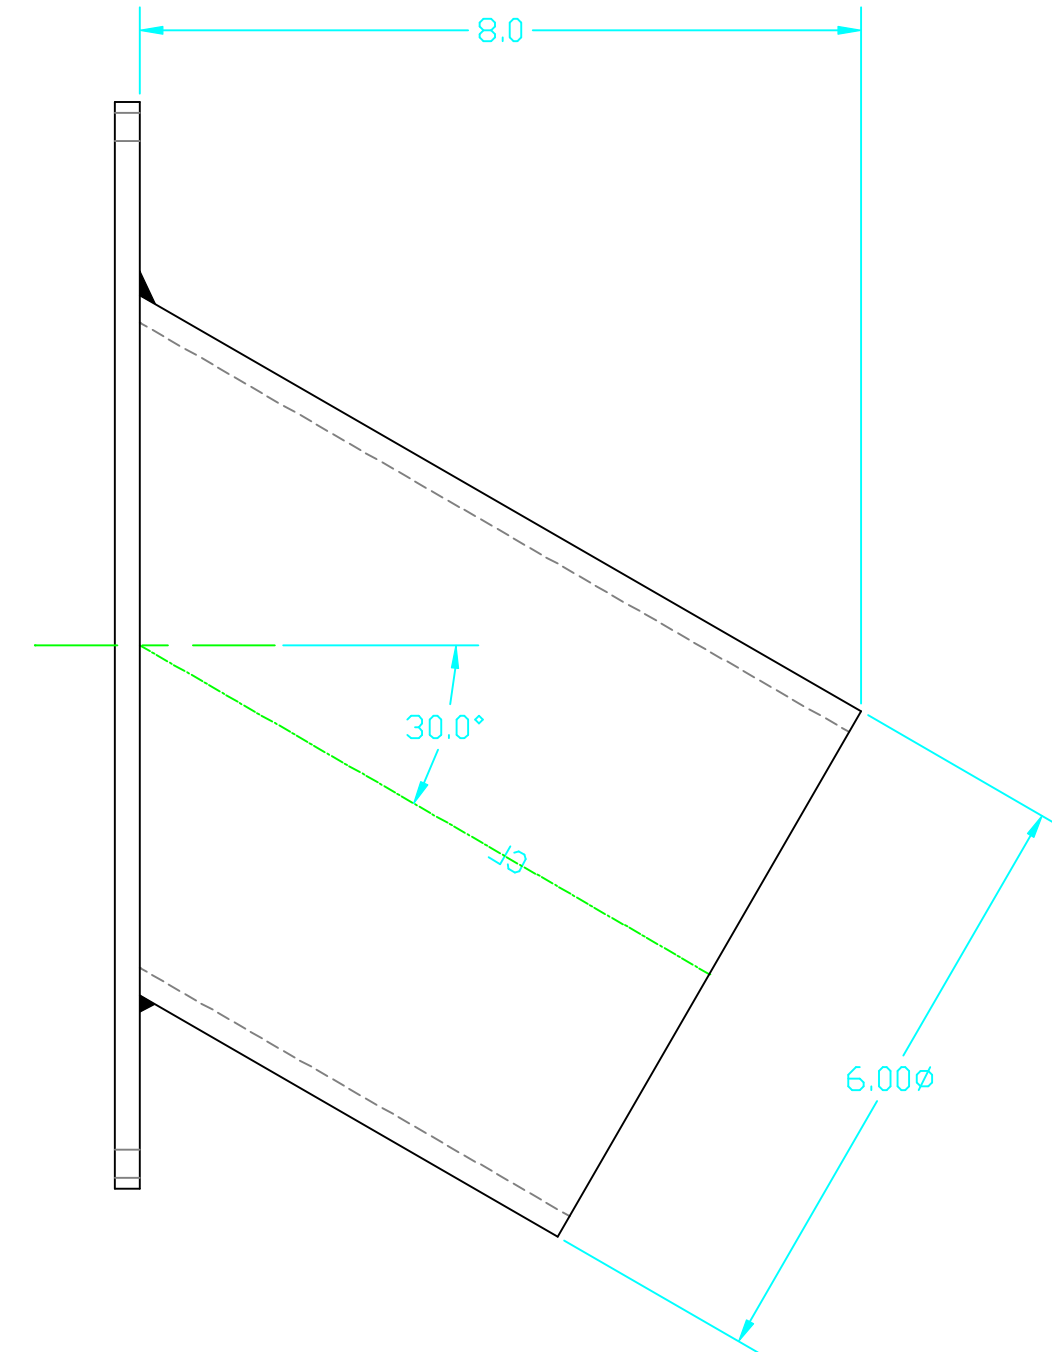

REF	QTY	PART or DRWG No.	CDS										MATERIAL	
PARTS and MATERIAL LIST														
TOLERANCES: DIMENSIONS ARE IN FEET (cm) FRACTIONAL ± 1/16(.16) FINISHED SURFACE RMS 63 ANGULAR ± 1° BREAK CORNERS: .02 TWO PLACE DECIMAL ± .01(.025) REMOVE ALL BURRS THREE PLACE DECIMAL ± .005(.013)														
MATERIAL: 6061-T6 ALUM			HEAT TREAT: -			FINISH: -			A INITIAL RELEASE			K.MASON 11/19/99		
USED ON: -			NEXT ASS'Y: -			PRE-RELEASE			MASON 8/17/99			SCALE 1:2		
DWG. NO. REFERENCE DRAWINGS			DESCRIPTION			DCC			SYS			DET		
6			5			4			3			2		
1			1			1			1			1		

CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY
 VIEWPORT ADAPTER
 ITMx
 ISC TABLE ASSEMBLY
 CAD FILE: D990398-A.dwg
 SIZE: C
 DWG. NO.: D990398-A-D
 SHEET: 1 of 1