

6

5

4

3



2

1

1. CLEAR ANODIZE PER MIL-A-8625

.281Ø THRU (4) HOLES EQ SP ON A 10.250Ø B.C.

NOTES:

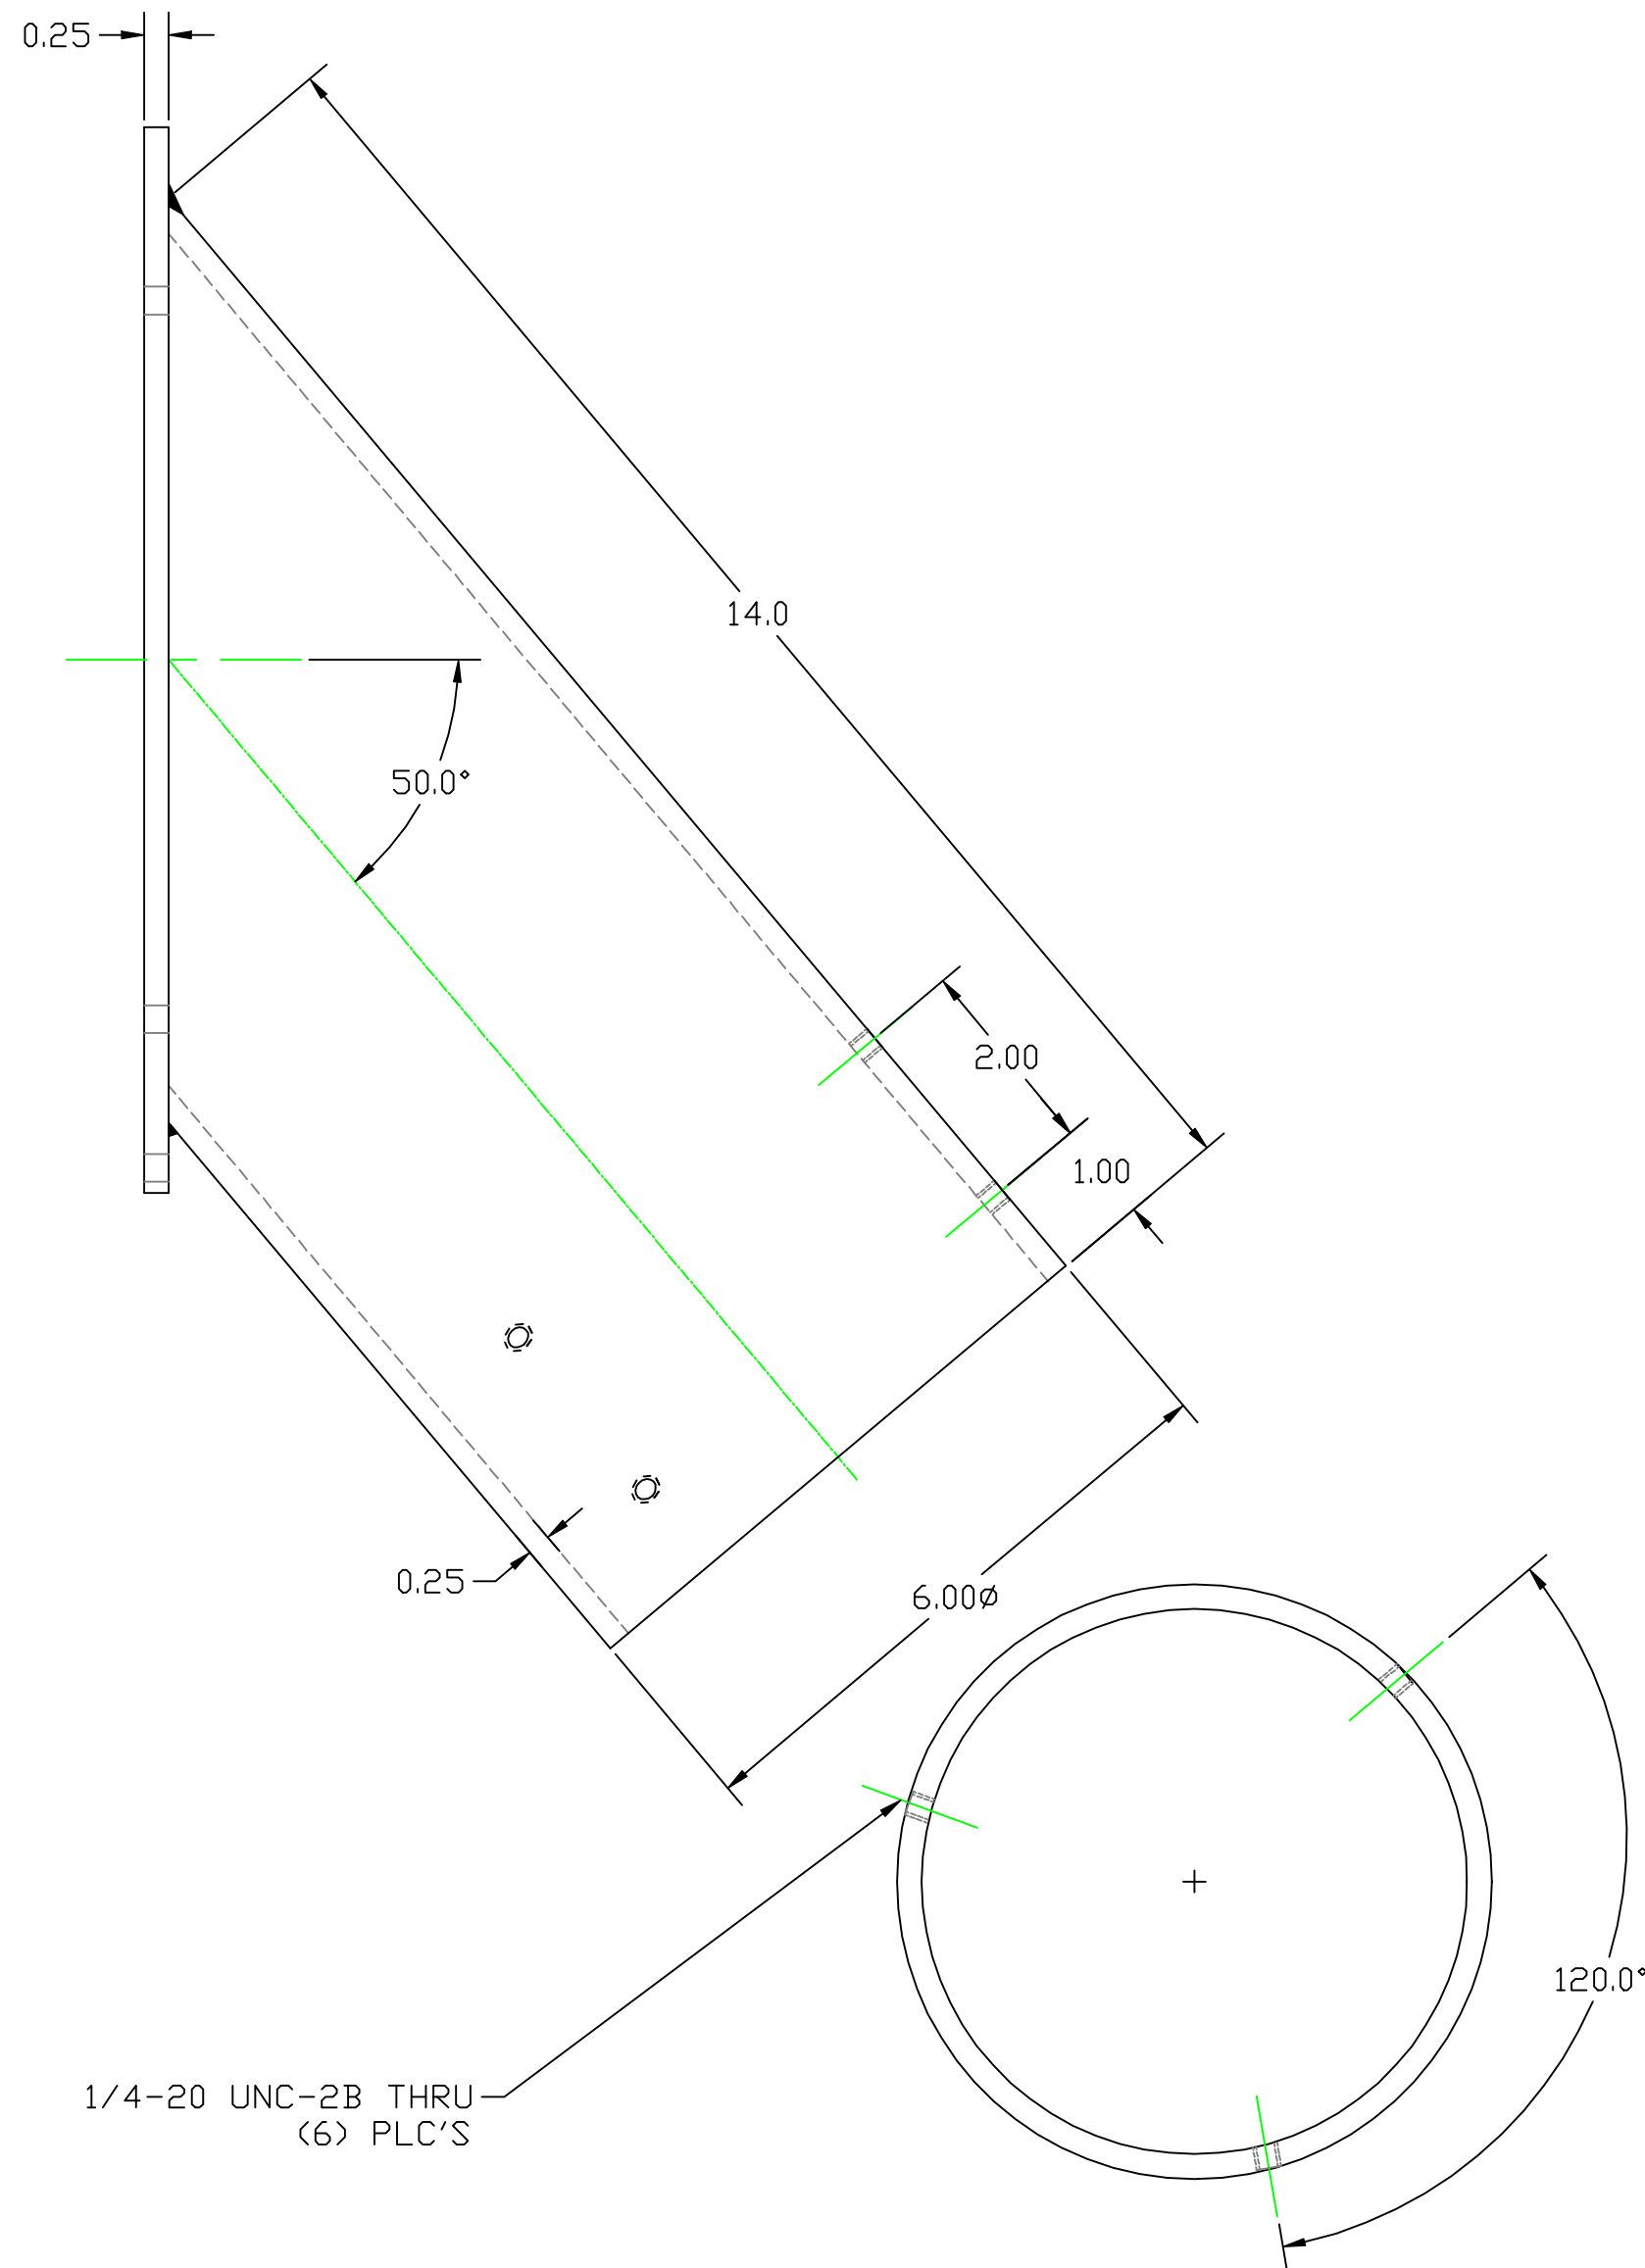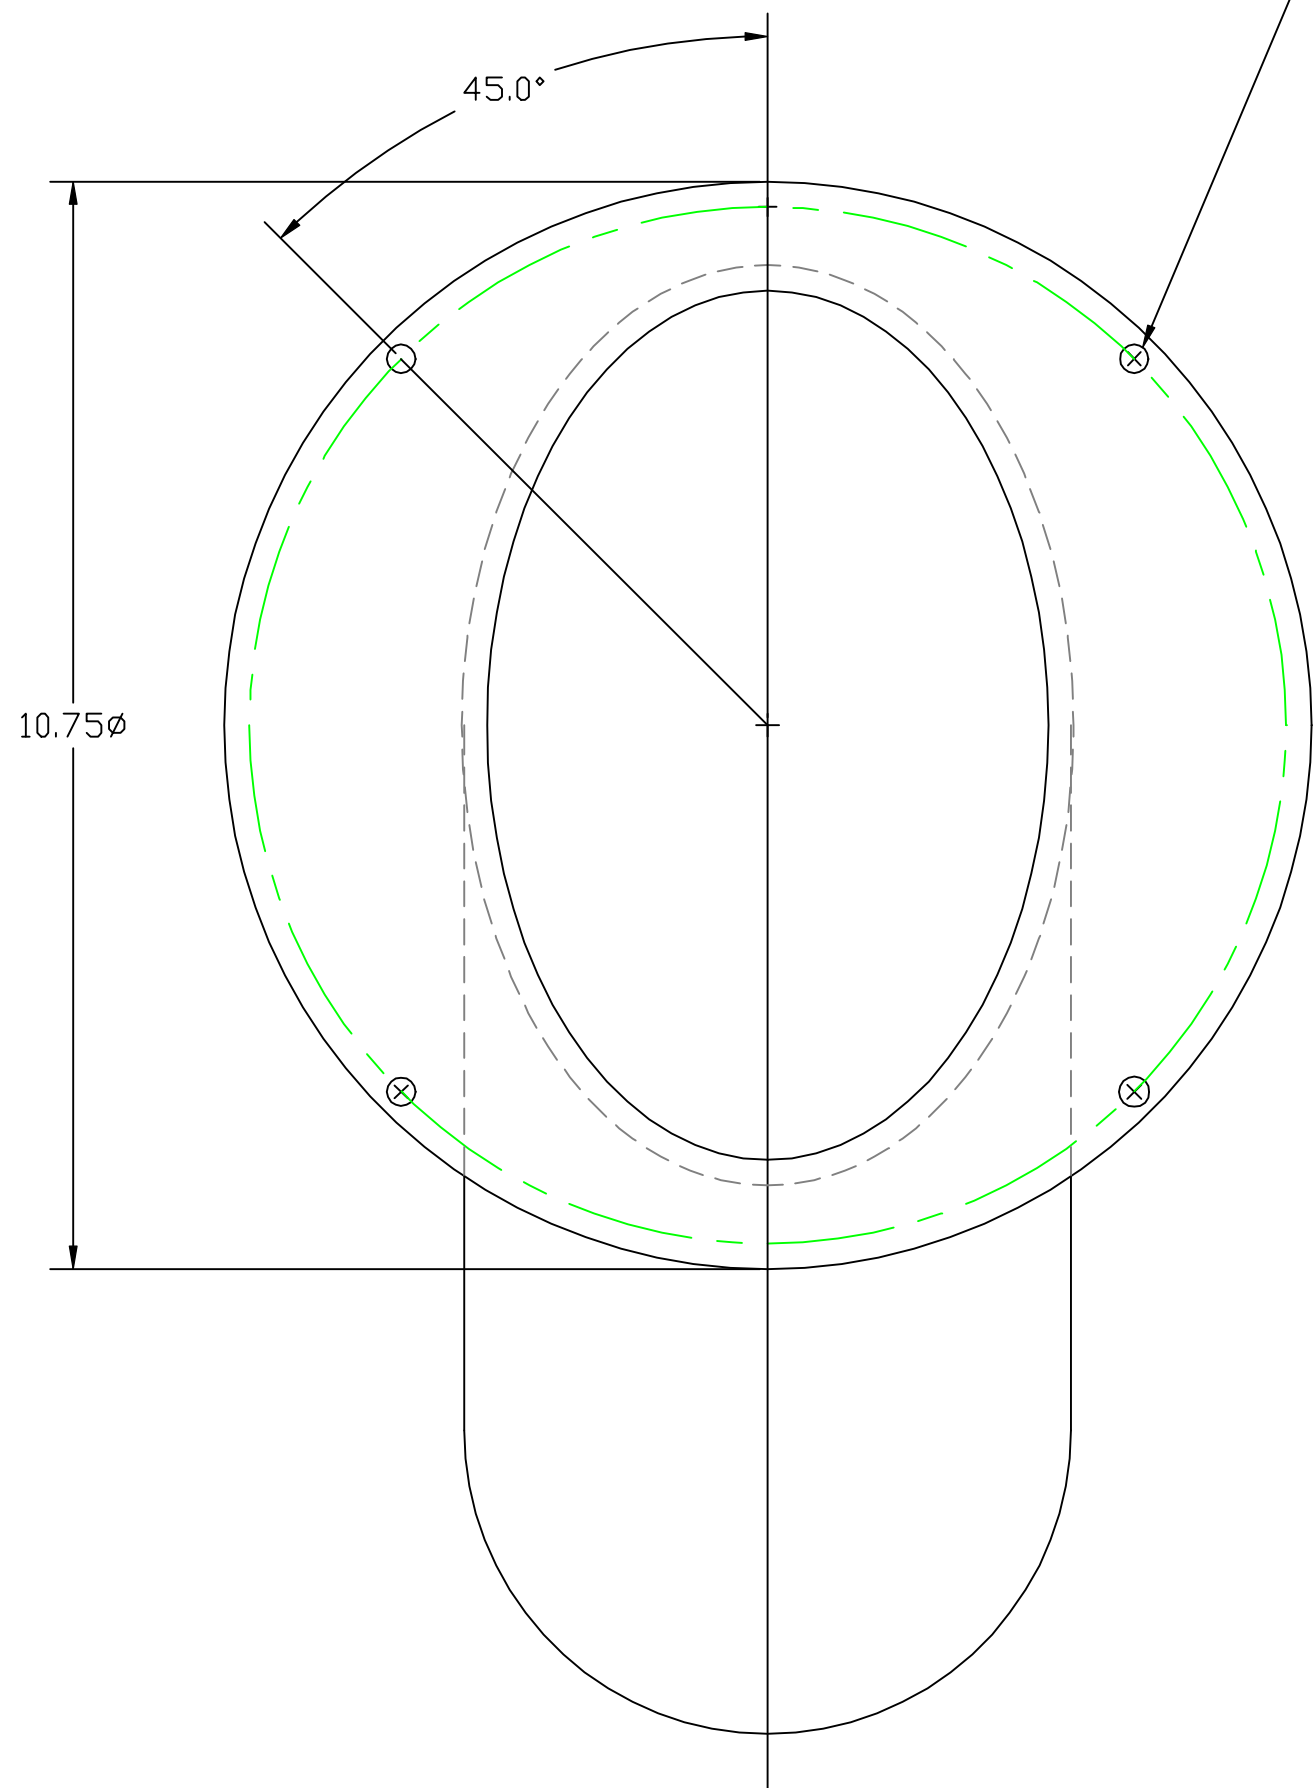

REF	QTY	PART or DRWG No.	CDS	MATERIAL
PARTS and MATERIAL LIST				
A	00	INITIAL RELEASE	K.MASDN 11/19/99	
REV		PRE-RELEASE	MASDN 11/29/99	
ISSUE DESCRIPTION				
			DCC	SYS
			DET	CDS
			VE	CC
			BT	CHECK
			DRWN	DATE
			SCALE 1:2	SHEET 1 of 1

UNLESS OTHERWISE SPECIFIED			
DIMENSIONS ARE IN FEET (cm)			
FRACTIONAL ± 1/16(.16)	FINISHED SURFACE RMS 63		
ANGULAR ± 1°	BREAK CORNERS: .02		
TWO PLACE DECIMAL ± .01(.025)	REMOVE ALL BURRS		
THREE PLACE DECIMAL ± .005(.013)			
MATERIAL: 6061-T6 ALUM	HEAT TREAT: -	FINISH: -	
USED ON: -	NEXT ASS'Y: -		

DWG. NO.	DESCRIPTION
	REFERENCE DRAWINGS

MIT
 CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY
 VIEWPORT MOUNT
 RM-Tx
 50 DEGREE
 IAS INITIAL ALIGNMENT
 CAD FILE: D990686-A.dwg
 DATE: 11/29/99
 SCALE: 1:2
 SHEET: 1 of 1

6

5

4

3

2

1