


Notes

1. Custom cable assembled with 1 ea. male PEEK 9 pin connector with mounting ears, PEEK backshell(A+ procedure/customer supplied tubes and bands) & PEEK braid, 2 ea. 28 AWG stranded, twisted pairs and 2 ea. Kapton 28 AWG stranded wires along with customer supplied copper shield and 2 ea. PEEK feedthroughs(D2000453). 48" long. (D2100381 v1).

Rev.	Description	Date	Made By	Approval
A	Initial Release	6/10/2021	Farrell	

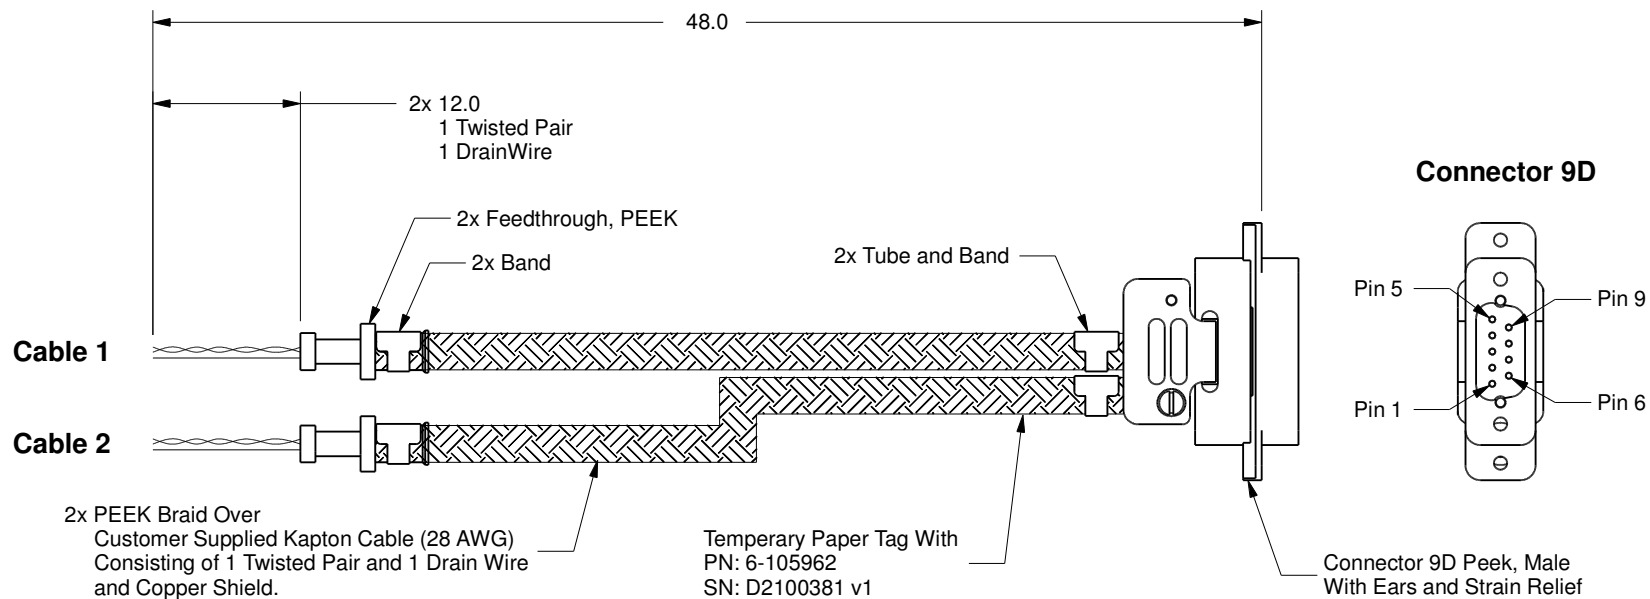

Connector 9D Male	Cable 1 Twisted Pair	Cable 2 Twisted Pair
1		
2		
3	A	
4		B
5		Shield, Drain Wire
6		
7	A	
8	Shield, Drain Wire	
9		B

UNCONTROLLED WEB DRAWING

Proprietary and Confidential
The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material
See Individual Components

Tolerances,
unless otherwise specified

.X ± .030
.XX ± .010
.XXX ± .005

Angles ± 0.5°
Finish 63Ra

Title

D2100381

Drawn by
Date

Farrell
6/10/2021

No. **6-105962**

Rev.

A

Approved

Sheet



Accu-Glass Products Inc.
25047 Anza Drive
Valencia, CA 91355
T 818-365-4215
F 818-365-7074
www.accuglassproducts.com