
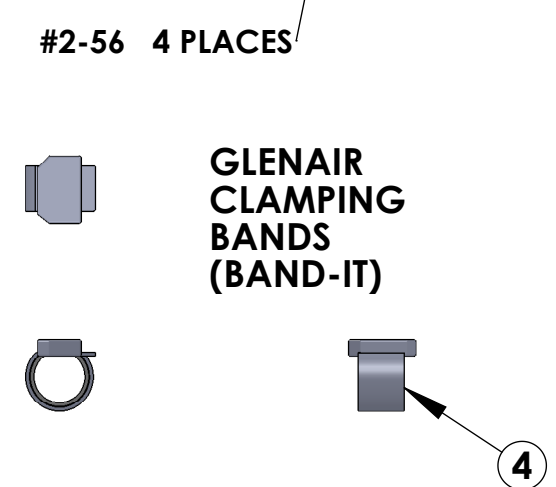









NOTES CONTINUED:
 5. SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACE FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: DXXXXX-VY S/N 001. VIBRATORY TOOL MAY BE USED.

6. APPROXIMATE WEIGHT = X.XXX LB.
 7. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH. USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED. REFER TO LIGO-E0900364
 8. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.
 9. ALL HELI-COIL HOLES TO BE PREPARED ACCORDING TO EMHART HELI-COIL PRODUCT CATALOG, HC2000, REV 4
 10. ALL HELI-COIL INSERTS TO BE INSTALLED BY LIGO PERSONNEL AFTER DELIVERY OF FINISHED PARTS. USE NITRONIC 60 THREADED INSERTS.
 11. ALL MATERIAL IS TO BE VIRGIN MATERIAL (i.e. NO WELD REPAIRS, PLUGS OR RECYCLED MATERIAL). NO REPAIRS SHALL BE MADE UNLESS APPROVED IN ADVANCE, AND IN WRITING, BY LIGO LABORATORY. REFER TO LIGO-E0900364.
 12. SURFACE FINISH TO BE AS-PROCESSED FROM MILL/SUPPLIER, FREE FROM SCRATCHES OR GOUGES.
 13. PART WILL BE PORCELAIN COATED PER LIGO SPECIFICATION E1000083 AFTER FABRICATION. THE INDICATED HOLES WILL BE MASKED PRIOR TO PORCELAIN COATING TO APPROXIMATELY 2.5-3X HOLE DIAMETER CENTERED ON BOTH SIDES OF THE HOLE.
 14. DIMENSIONS APPLY BEFORE PORCELAIN COATING UNLESS SPECIFIED.
 15. BEND RADIUS: UNLESS OTHERWISE NOTED, THE BEND RADIUS SHOULD BE THE MINIMUM REQUIRED TO FORM WITHOUT CRACKING OR REQUIRING ADDITIONAL WORK WHEN FORMING. IN PARTICULAR IF SHEET METAL IS TO BE PORCELAIN COATED, THE BEND RADIUS SHALL BE A MINIMUM OF .12" OUTSIDE RADIUS OF BEND UNLESS OTHERWISE NOTED.

CONNECTOR J1

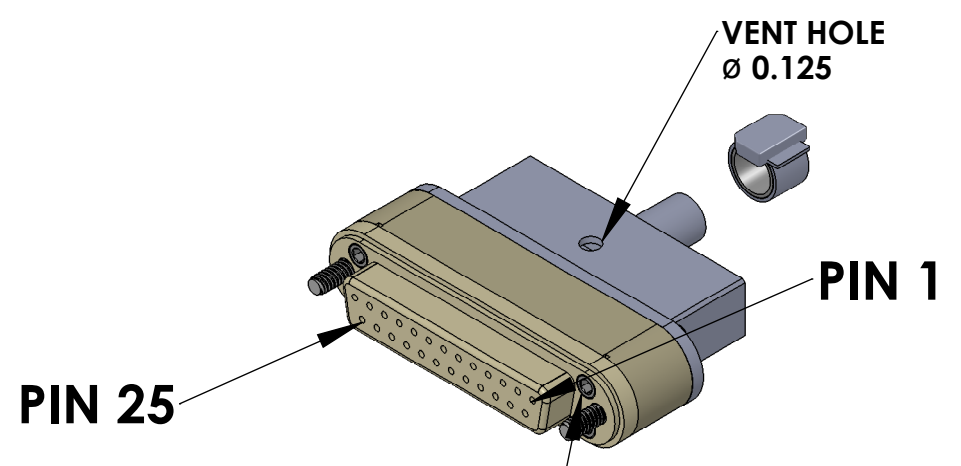

CONNECTOR J2

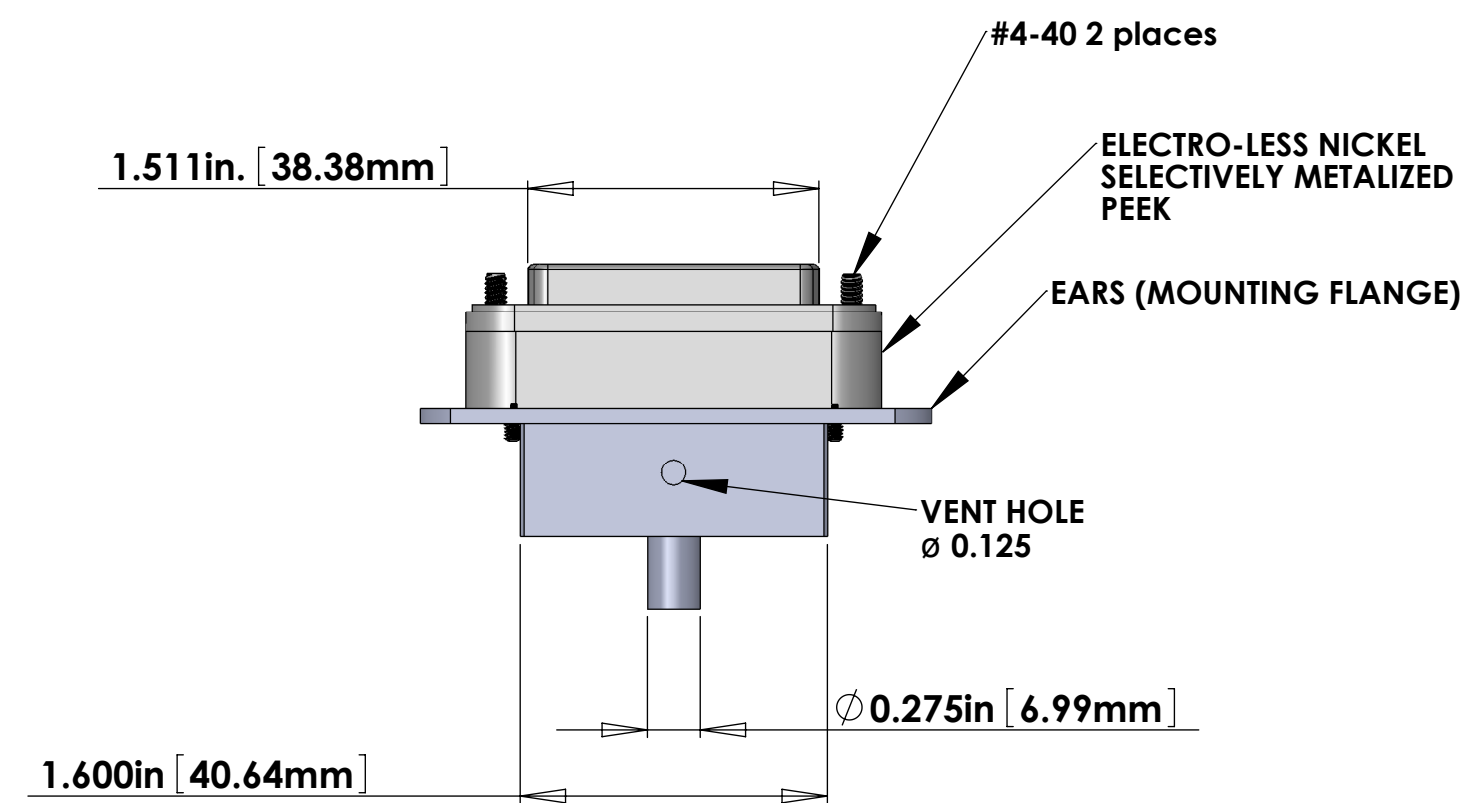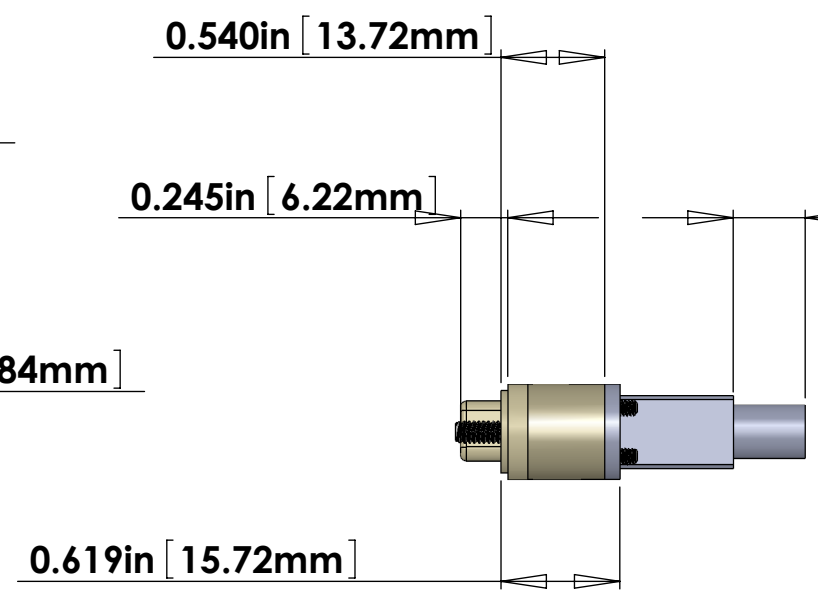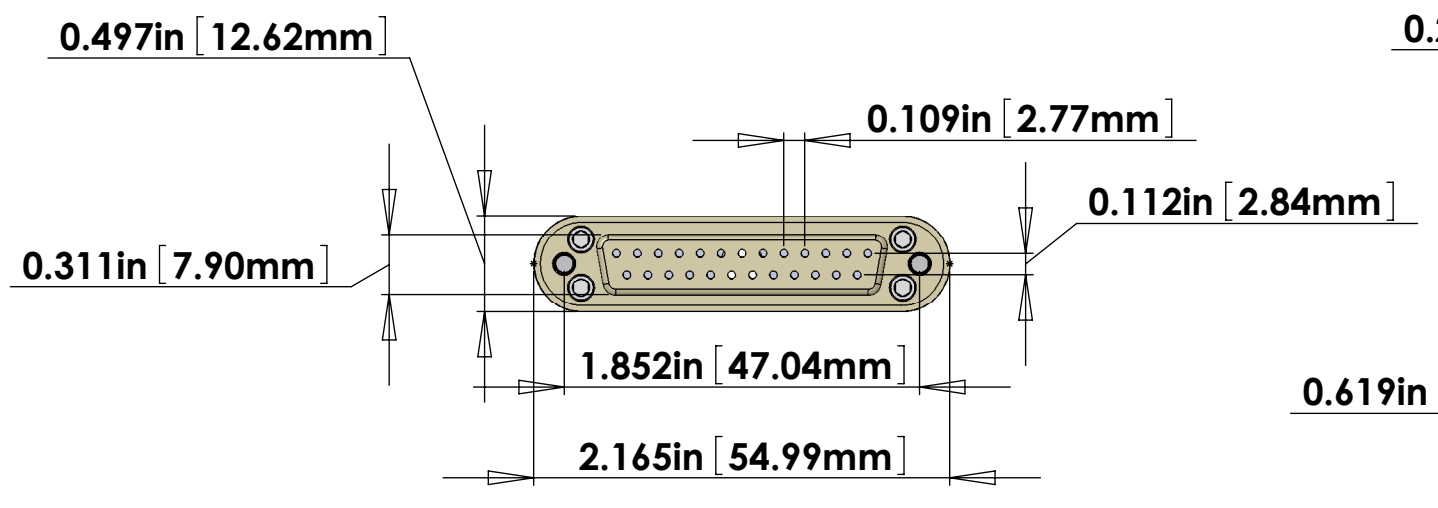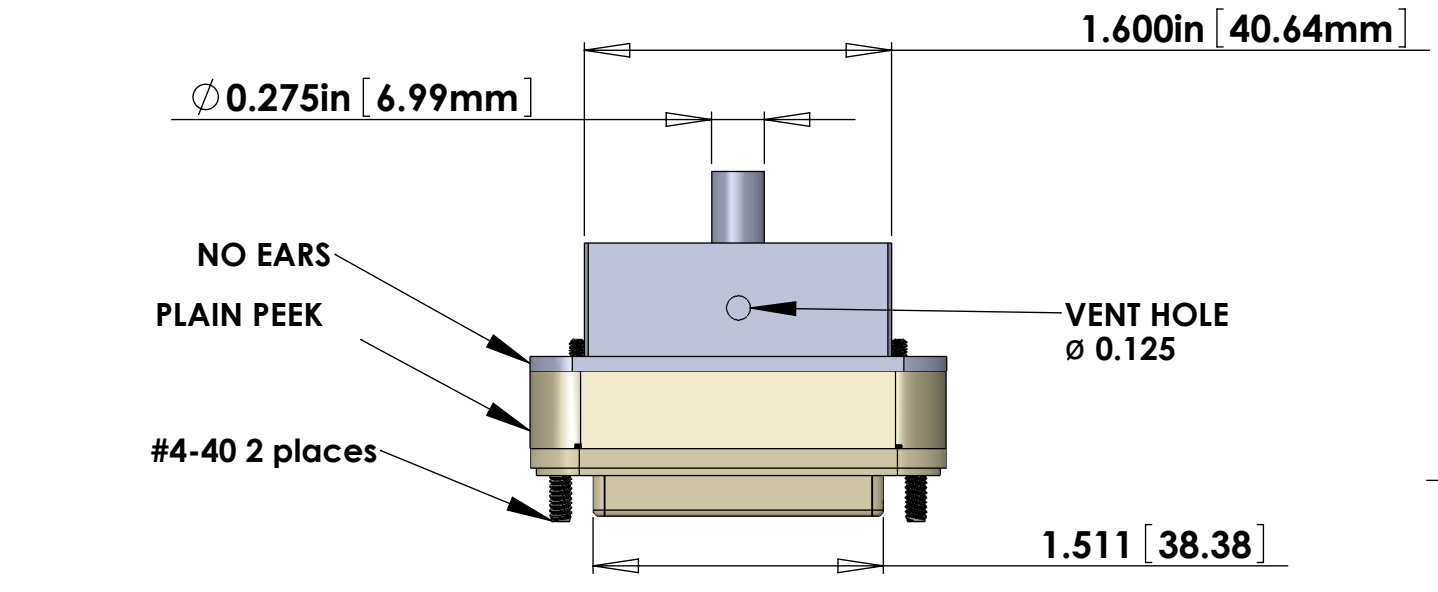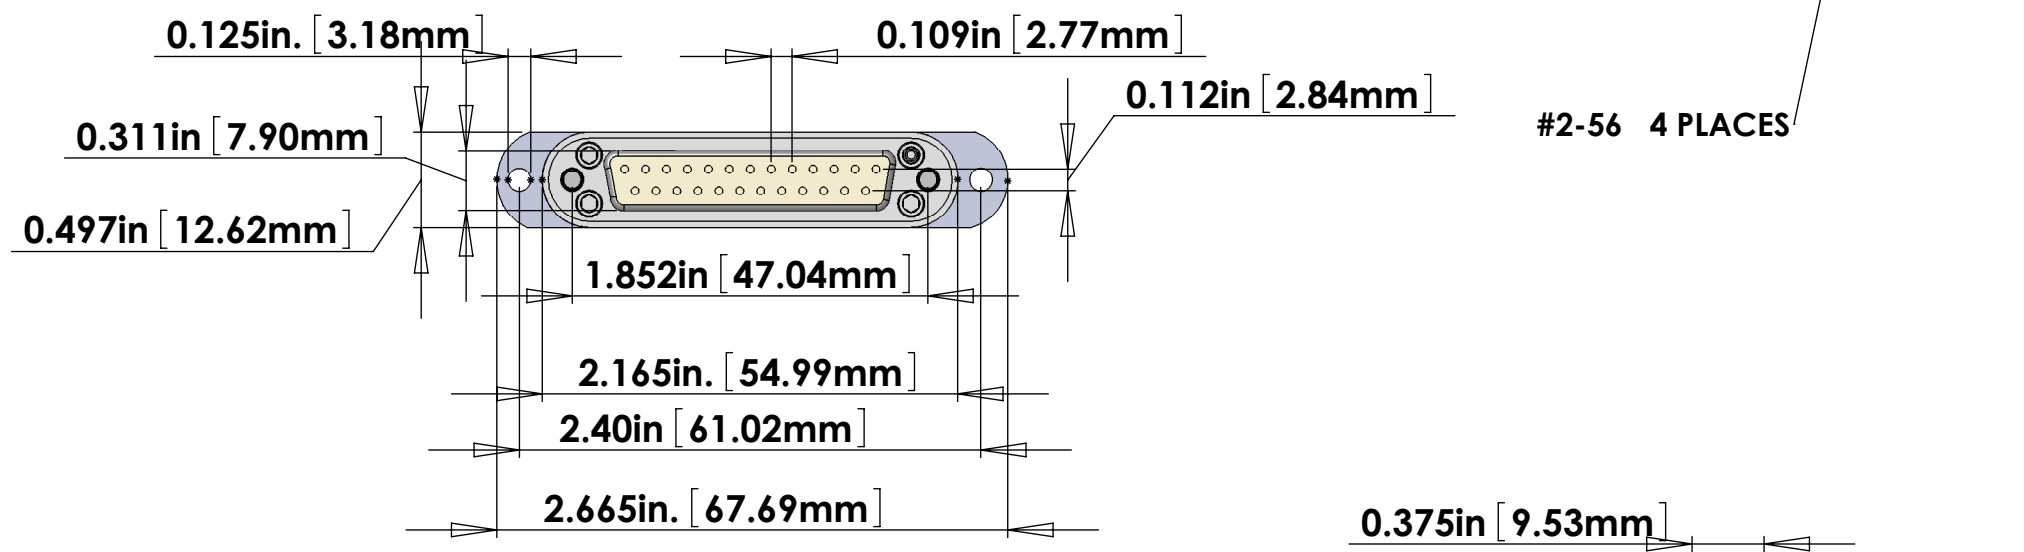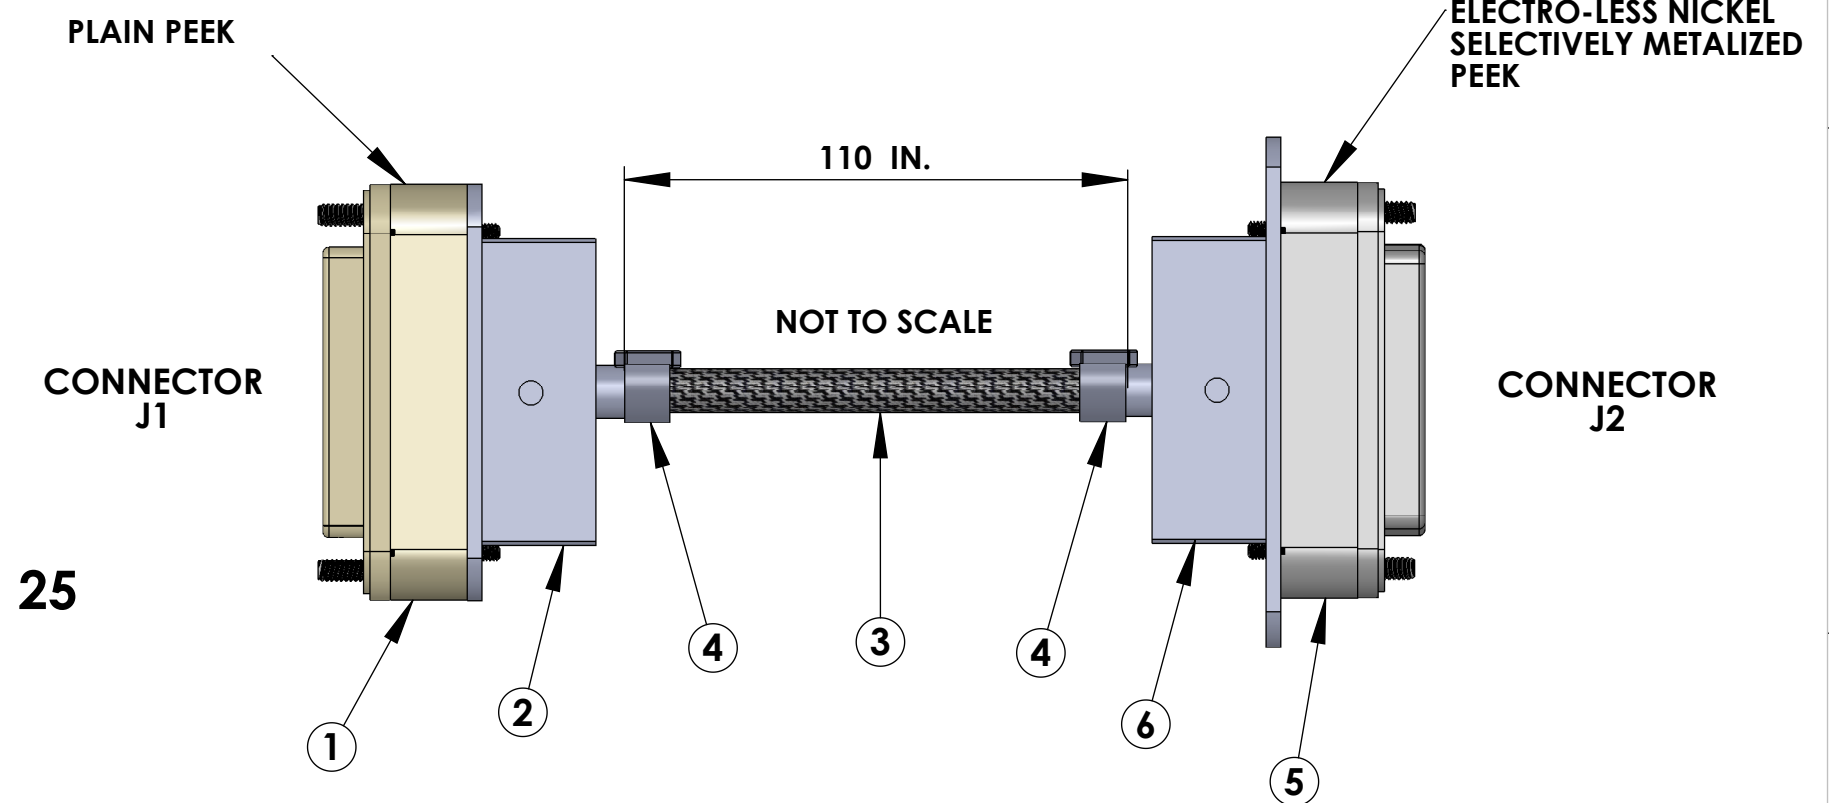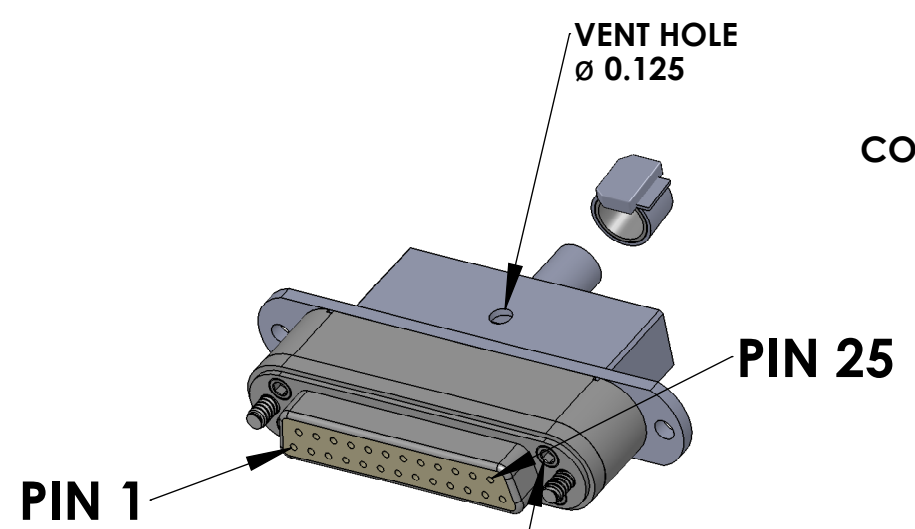

V25A-110 CABLE ASSEMBLY CIRCUIT SUMMARY V-DB25 F/S1-110-DB25 F/S1

| CABLE NAME | COND.- WIRE ID | TWISTED PAIR | LENGTH * | FROM | TO |
|------------|----------------|--------------|----------|--------------|--------------|
| V25A-110 | 25 COND. CABLE | (12 TOTAL) | 110 in. | Conn. J1 | Conn. J2 |
| | W1 | SHIELD | 110 in | PIN 1, SHELL | PIN 1, SHELL |
| | W2 | TP-1 | 110 in | PIN 2 | PIN 2 |
| | W14 | | 110 in | PIN 14 | PIN 14 |
| | W3 | TP-2 | 110 in | PIN 3 | PIN 3 |
| | W15 | | 110 in | PIN 15 | PIN 15 |
| | W4 | TP-3 | 110 in | PIN 4 | PIN 4 |
| | W16 | | 110 in | PIN 16 | PIN 16 |
| | W5 | TP-4 | 100 in | PIN 5 | PIN 5 |
| | W17 | | 110 in | PIN 17 | PIN 17 |
| | W6 | TP-5 | 110 in | PIN 6 | PIN 6 |
| | W18 | | 110 in | PIN 18 | PIN 18 |
| | W7 | TP-6 | 110 in | PIN 7 | PIN 7 |
| | W19 | | 110 in | PIN 19 | PIN 19 |
| | W8 | TP-7 | 110 in | PIN 8 | PIN 8 |
| | W20 | | 100 in | PIN 20 | PIN 20 |
| | W9 | TP-8 | 110 in | PIN 9 | PIN 9 |
| | W21 | | 110 in | PIN 21 | PIN 21 |
| | W10 | TP-9 | 110 in | PIN 10 | PIN 10 |
| | W22 | | 110 in | PIN 22 | PIN 22 |
| | W11 | TP-10 | 110 in | PIN 11 | PIN 11 |
| | W23 | | 110 in | PIN 23 | PIN 23 |
| | W12 | TP-11 | 110 in | PIN 12 | PIN 12 |
| | W24 | | 110 in | PIN 24 | PIN 24 |
| | W13 | TP-12 | 110 in | PIN 13 | PIN 13 |
| | W25 | | 110 in | PIN 25 | PIN 25 |

* The length shown in this list is the length of the cable between the two connectors. Add additional length as necessary for the internal wiring of the connectors and strip length.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | LENGTH |
|----------|--------------------|---|------|---------|
| 1 | CUSTOM DB25 FEMALE | DB25 FEMALE CONNECTOR (J1) FOR UHV (PEEK) | 1 | |
| 2 | CUSTOM BACKSHELL | DB25 CONNECTOR BACKSHELL (NO EARS) FOR UHV (STAINLESS) | 1 | |
| 3 | C1 | 25 COND. (12 TW PAIR + 1 WIRE + SHIELD) CABLE WITH COPPER BRAID (SHIELD) AND PEEK OVERBRAID | 1 | 110in + |
| 4 | GLENNAIR 600-052 | GLENNAIR 600-052 STANDARD BRAID CLAMP (BAND - IT) | 2 | |
| 5 | CUSTOM DB25 FEMALE | DB25 FEMALE CONNECTOR (J2) FOR UHV (METALIZED PEEK) | 1 | |
| 6 | CUSTOM BACKSHELL | DB25 CONNECTOR BACKSHELL (WITH EARS) FOR UHV (STAINLESS) | 1 | |

* NOTE: USE WHATEVER LENGTH IS NECESSARY FOR THE INTERNAL WIRING OF THE CONNECTORS AND STRIP LENGTH TO ACHIEVE THE CORRECT OVERALL LENGTHS.

- NOTES: (UNLESS OTHERWISE SPECIFIED)
 1. MATERIAL: a. J1 CONNECTOR SHELL - PEEK VICTREX 450GL30
 b. J2 CONNECTOR SHELL - SELECTIVELY METALIZED OVER PEEK VICTREX 450GL30.
 c. BACKSHELLS - STAINLESS STEEL WITH VENT HOLE.
 d. CONTACTS - BERYLLIUM COPPER ALLOY C17300 0.000050 MIN. GOLD OVER NICKEL
 e. HARDWARE: CORROSION RESISTANCE STEEL, PASSIVATED
 f. PEEK BRAID - PEEK VICTREX GRADE TDS-450CA30 CARBON LOADED - SUPPLIED BY LIGO

2. CABLE 25 COND. 28 AWG, (65 STRD 46 AWG) WITH PFA INSULATION COONER WIRE #CZ1105 12 TWISTED PAIRS (4 TO 5 TWISTS PER INCH) + 1 WIRE OVERALL 40AWG COPPER BRAID 50% COVERAGE - SUPPLIED BY LIGO OVERALL PEEK BRAID MIN. 50% COVERAGE OVERALL CABLE O.D. WILL BE 0.240 IN.
 3. CONNECTORS WILL BE SUPPLIED WITH HARDWARE (LENGTH OF SCREWS AS SHOWN ARE APPROXIMATE SCREWS SHOULD BE THE PROPER LENGTH FOR PROPER MATING)

| NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED) | |
|--|---|
| DIMENSIONS ARE IN | 1. INTERPRET DRAWING PER ASME Y14.5-1994. 2. REMOVE ALL SHARP EDGES, .005-.015, FOR MACHINED PARTS. ROUND ALL EDGES APPROXIMATELY R.02 FOR SHEET METAL PARTS. 3. DO NOT SCALE FROM DRAWING. 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE. |
| TOLERANCES: .XX ± .XXX ± | |
| ANGULAR ± ° | |
| MATERIAL | Material <not specified> |
| FINISH | μinch |

| | | | | | |
|---|--|------------|---------|----------------------------|--------------|
| CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY | | PART NAME | | CUSTOM CABLE SPECIFICATION | |
| SYSTEM | | SUB-SYSTEM | | V25A-110 | |
| LIGO | | ISC | | DESIGNER | B.ABBOTT |
| NEXT ASSY | | CHECKER | E.BROWN | SIZE | DWG. NO. |
| | | APPROVAL | | D | D1100152 |
| | | SCALE: 1:1 | | PROJECTION: | SHEET 1 OF 1 |
| | | | | REV. | v2 |

D1100152_V25A-110_PART PDM REV. DRAWING PDM REV.