


---

# LIGO Data Acquisition System

R. Bork



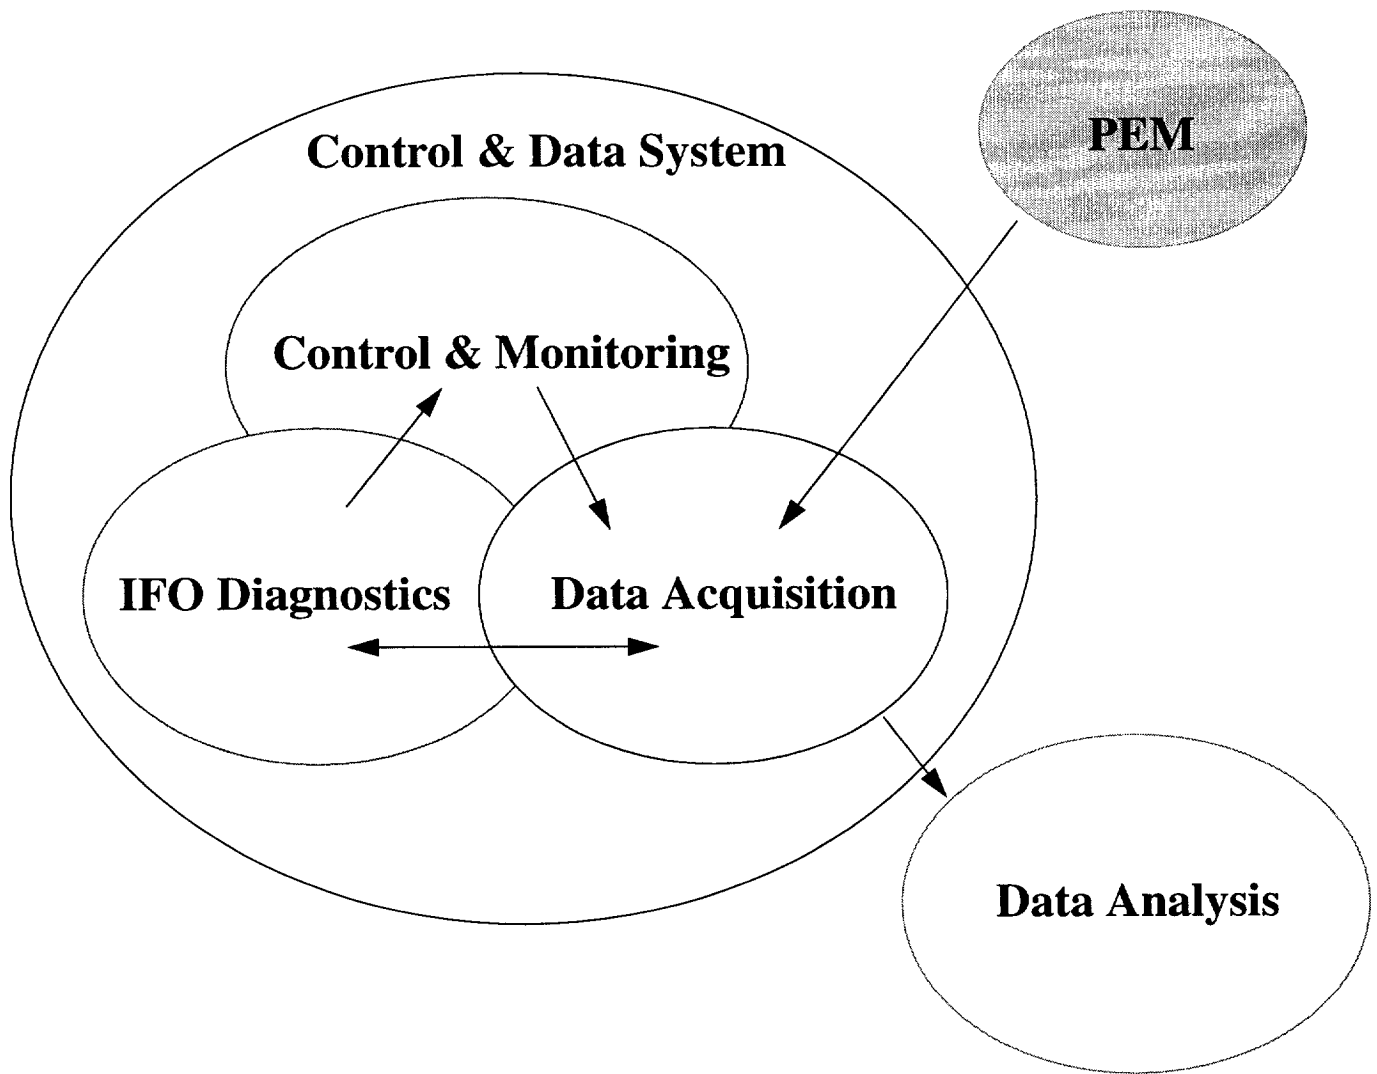


# Design Requirements


---

- Acquire data at up to 16KHz second / channel
- Minimum 16bit accuracy
- Acquire up to 20MByte/sec (Hanford) of data
  - ›› Signal lists / rates in review process
- Format data into LIGO/VIRGO standard frame formats
- Record data to disk (minimum past 16 hours) and archive to tape
  - ›› Approx. 3MByte/sec/Interferometer (under review)
- Provide data to diagnostics at 16Hz
- Provide basic data viewers


# DAQS Overview

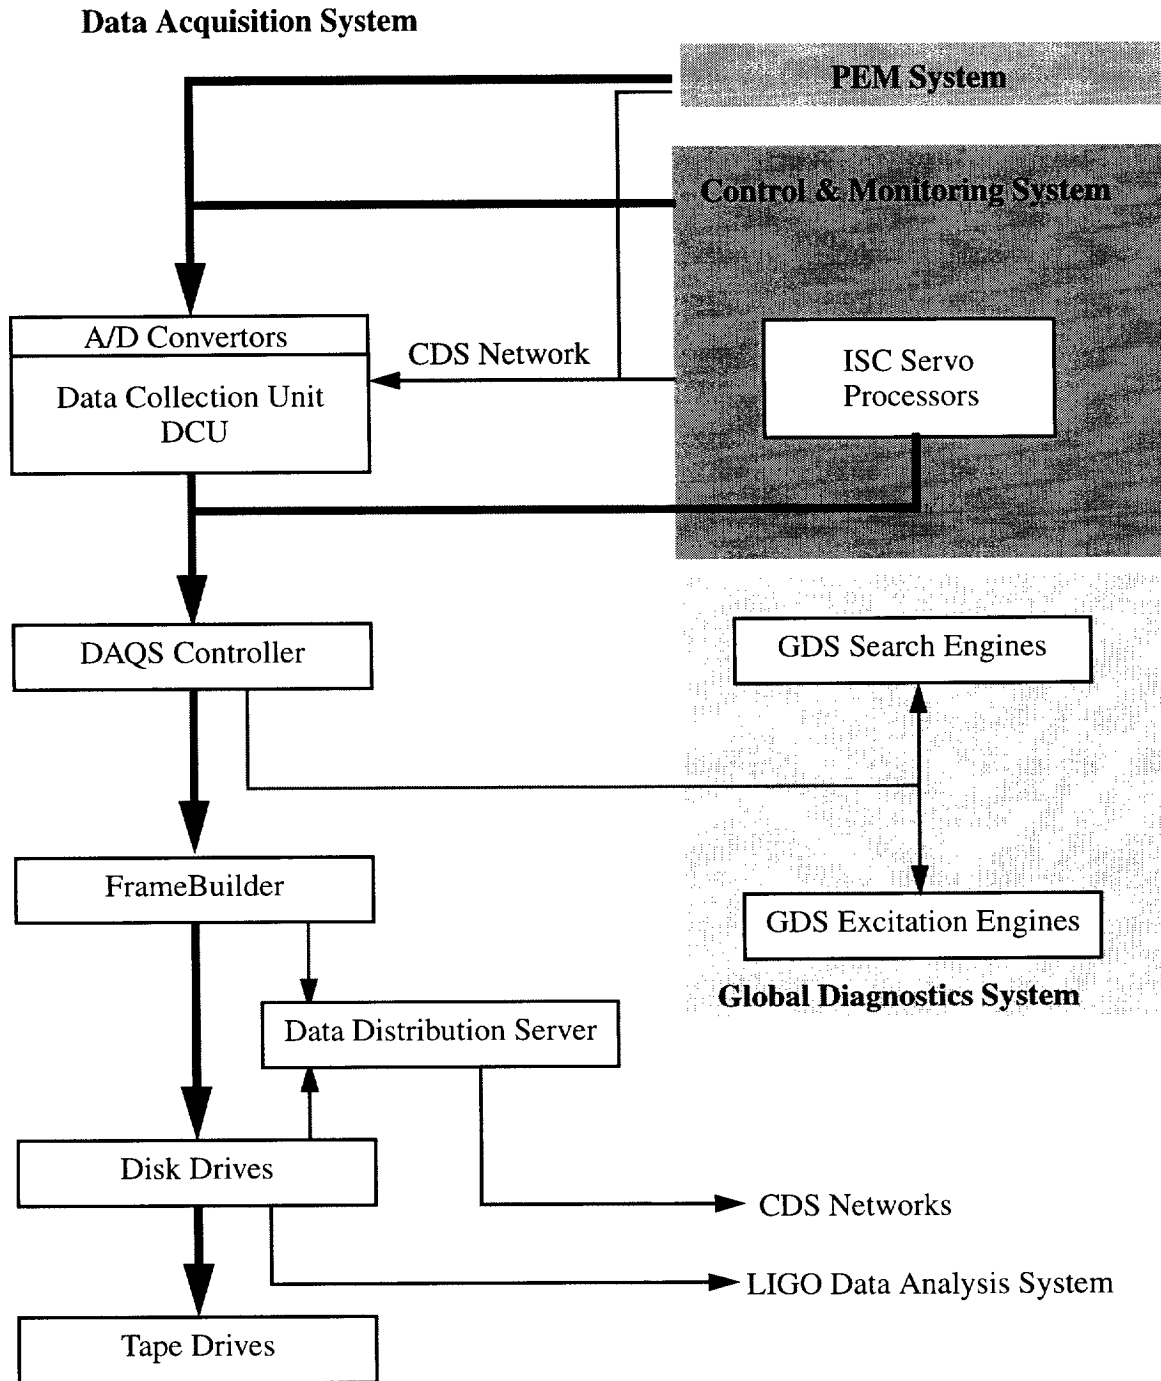

# Data Collection Unit (DCU)

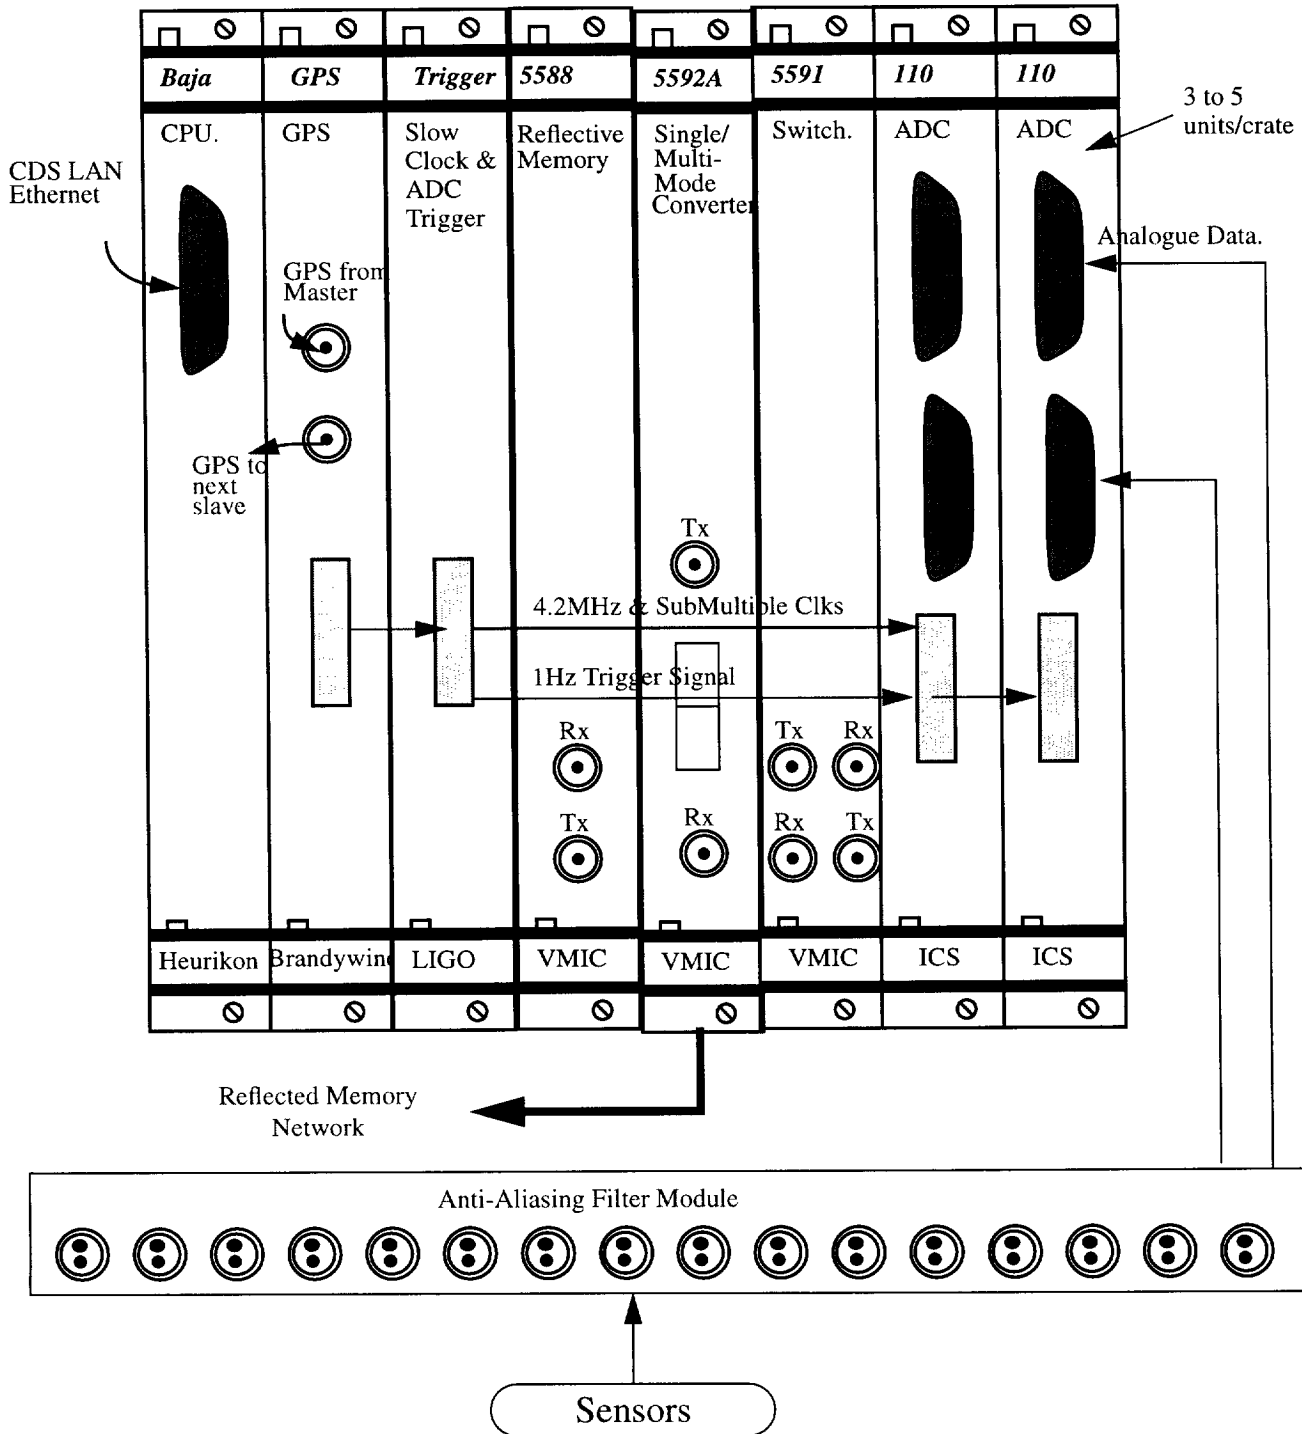


# Reflected Memory

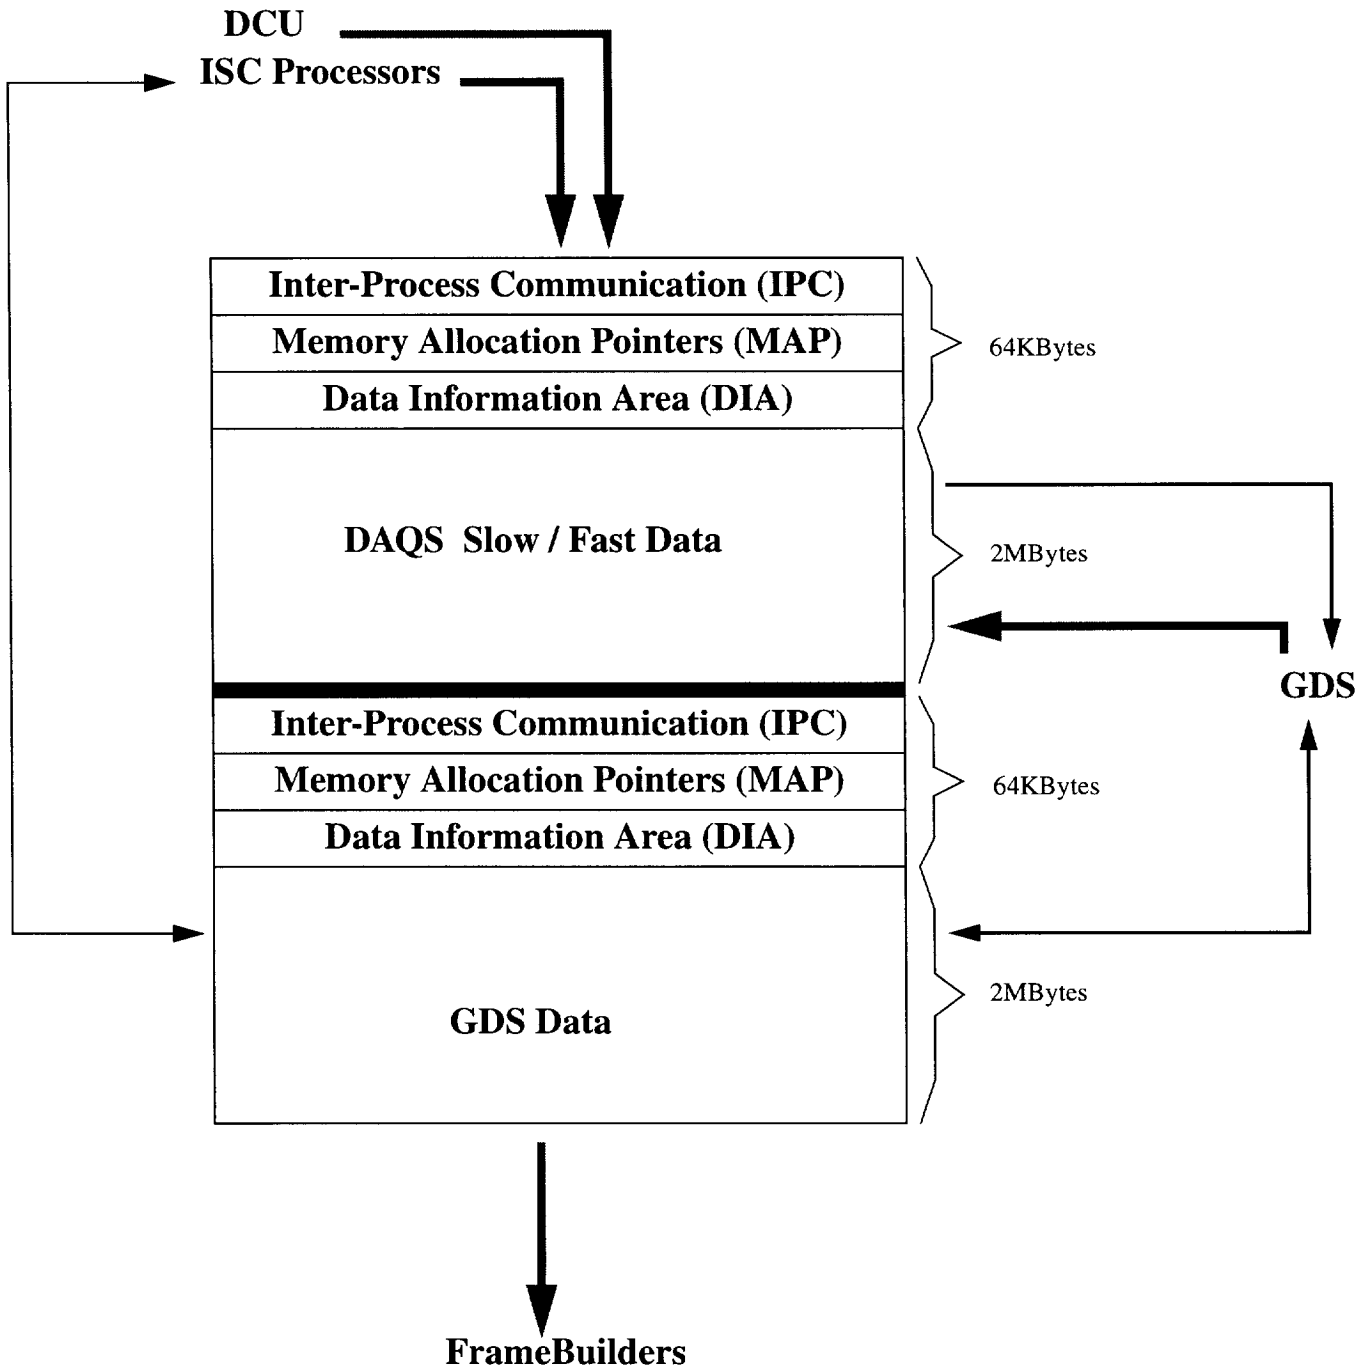

# DAQS FrameBuilder

- Sun UltraSparc 60 (2)
- PCI Reflected Memory Interface
- ATM Network Interface

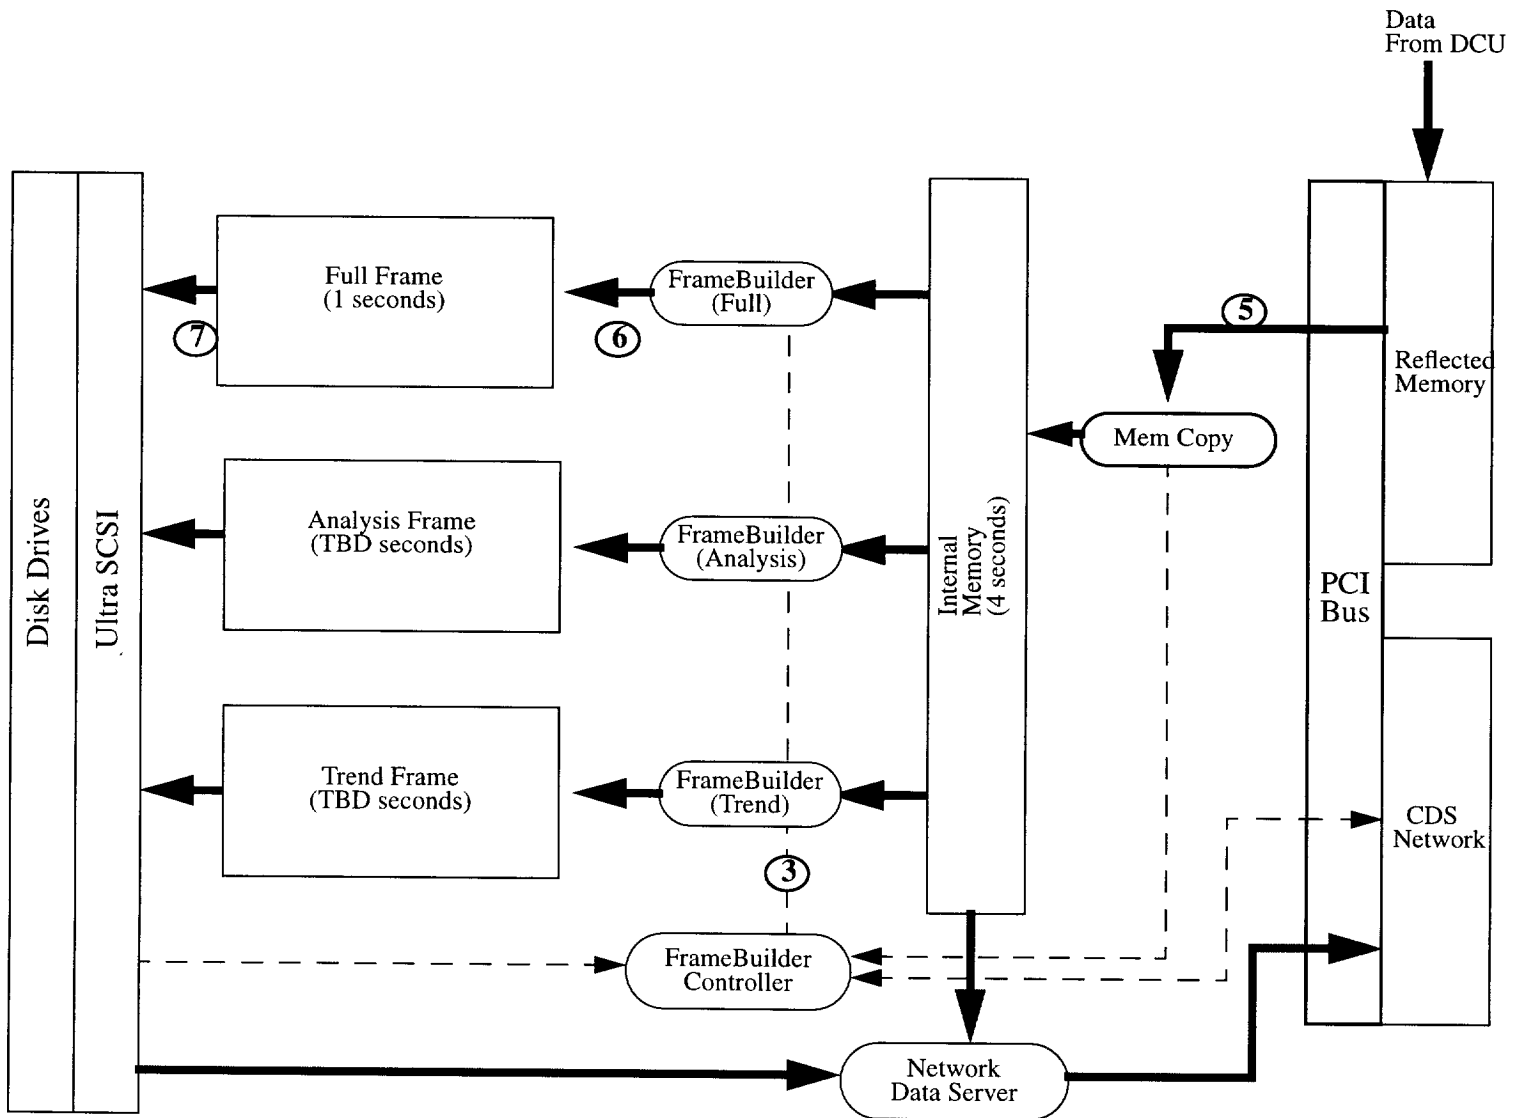

*Note 1, Linda Turner, 04/20/98 03:50:39 PM*  
LIGO-G980049-09-M