
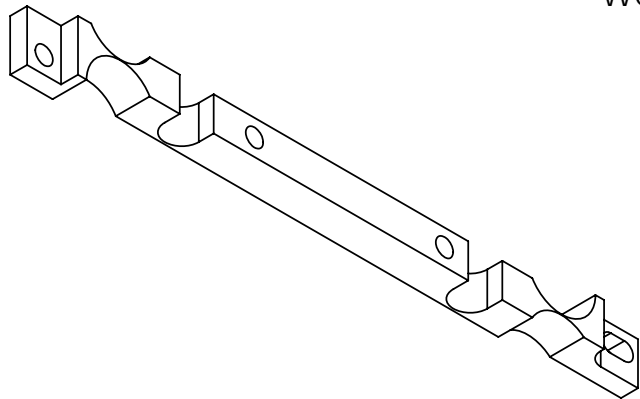


NOTE 1:
All holes are close
clearance holes for
4-40 socket head
cap screws.
The slot is 0.1 in wide
and same diameter
as req. for clearance
of the 4-40 screws.

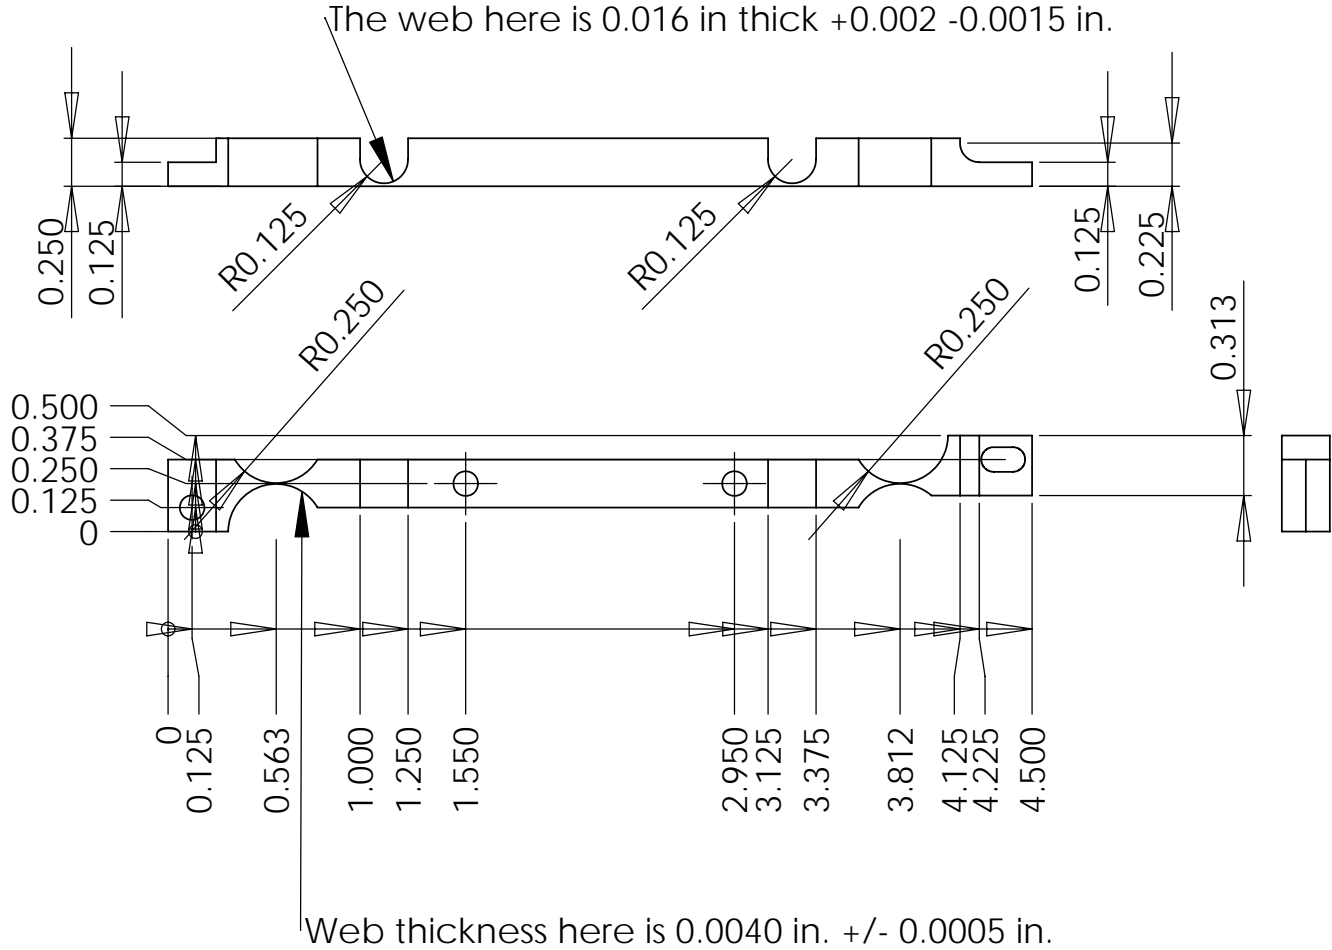

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: GS-13 Replacement Flexure Top BeCu		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DRAWN	D Clark	2009.02.18			
	CHECKED					
	ENG APPR.					
	MFG APPR.					
INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.			SIZE DWG. NO. REV A SU-LIGO		
MATERIAL BeCu C17200H	COMMENTS:					
FINISH						
DO NOT SCALE DRAWING				SCALE 1:1	WEIGHT:	SHEET 1 OF 1