

REV.	DATE	DCN #	DRAWING TREE #

CONNECTOR J1 25 PIN D MALE

NOTES CONTINUED:

1. SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACES FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE 07 HIGH CHARACTERS. EXAMPLE: A DXXXXXX.Y, 5/N, 001

2. APPROXIMATE WEIGHT - X.XXX LB.

3. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH. USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED. REFER TO LIGO-E0900364

4. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364

5. ALL HELI-COIL HOLES TO BE PREPARED ACCORDING TO EMHART HELI-COIL PRODUCT CATALOG, HC2000, REV 4

6. ALL HELI-COIL INSERTS TO BE INSTALLED BY LIGO PERSONNEL AFTER DELIVERY OF FINISHED PARTS. USE NITRONIC 60 THREADED INSERTS.

7. ALL MATERIAL IS TO BE VIRGIN MATERIAL (I.E. NO WELD REPAIRS, PLUGS OR RECYCLED MATERIAL). NO REPAIRS SHALL BE MADE UNLESS APPROVED IN ADVANCE. AND IN WRITING, BY LIGO LABORATORY. REFER TO LIGO-E0900364








8. SURFACE FINISH TO BE AS PROCESSED FROM MILL/SUPPLIER, FREE FROM SCRATCHES OR GOUGES

9. PART WILL BE PORCELAIN COATED PER LIGO SPECIFICATION E100003 AFTER FABRICATION. THE INDICATED HOLES WILL BE MASKED PRIOR TO PORCELAIN COATING TO APPROXIMATELY 2-3X HOLE DIAMETER CENTERED ON BOTH SIDES OF THE HOLE.

10. DIMENSIONS APPLY BEFORE PORCELAIN COATING UNLESS SPECIFIED

11. BEND RADIUS: UNLESS OTHERWISE NOTED, THE BEND RADIUS SHOULD BE THE MINIMUM REQUIRED TO FORM WITHOUT CRACKING OR REQUIRING ADDITIONAL WORK WHEN FORMING. IN PARTICULAR IF SHEET METAL IS TO BE PORCELAIN COATED, THE BEND RADIUS SHALL BE A MINIMUM OF 12" OUTSIDE RADIUS OF BEND UNLESS OTHERWISE NOTED

12. NOTES 13 AND 14 DO NOT APPLY TO THIS PART

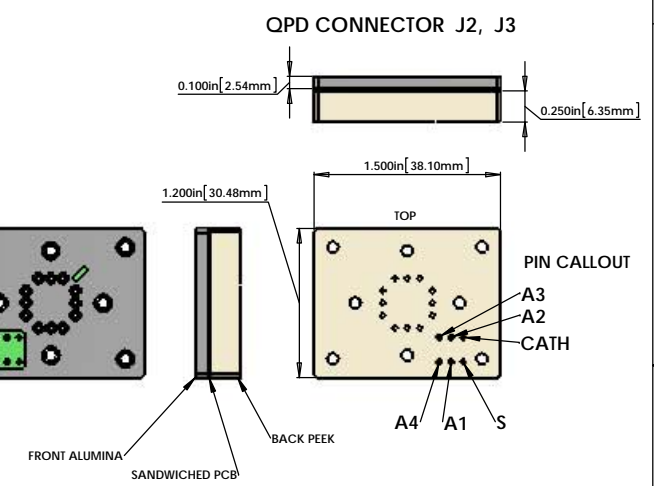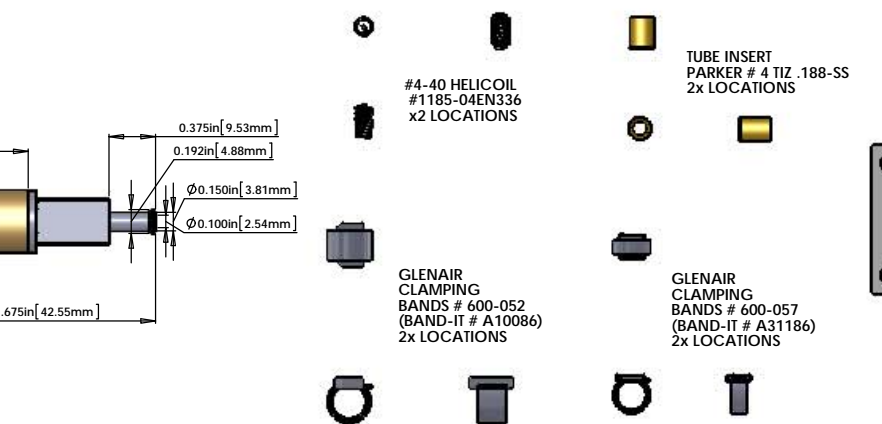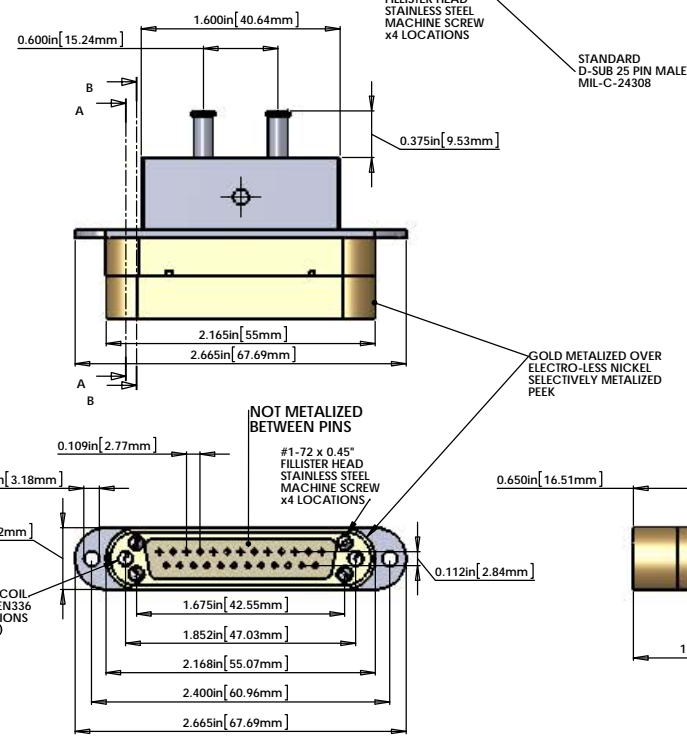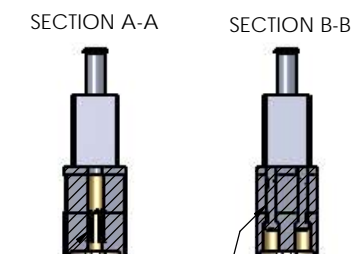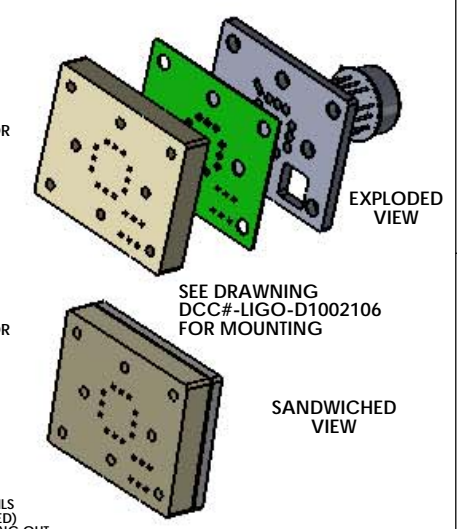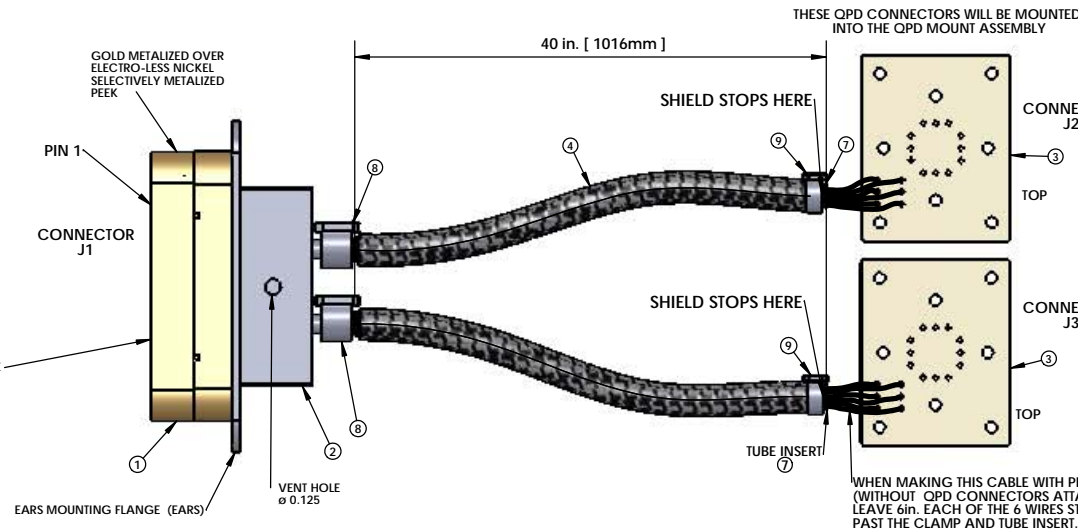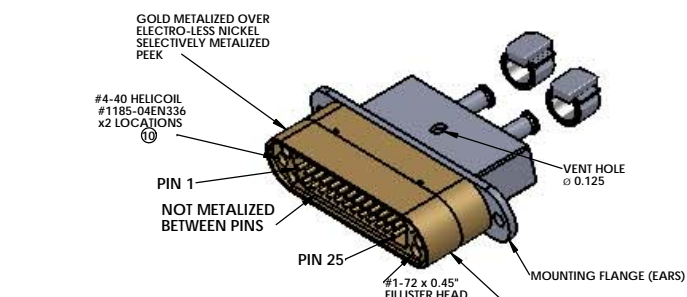

ENLARGED TO SHOW DETAIL

BILL OF MATERIALS				
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	LENGTH
1	TICOR # (TS0149-25CG20B52-100F) OR EQUIVALENT	CUSTOM DB25 MALE CONNECTOR (J1) FOR UHV (GOLD METALIZED PEEK)	1	
2	ITEM 2.6 (16 or 17) FROM DCC#-LIGO-D1002106	CUSTOM DB25 CONNECTOR BACKSHELL FOR UHV (STAINLESS)	1	
3	QPD FEMALE CONNECTOR (J2,J3) FOR UHV (PEEK)		2	
4	C1	6 COND. CABLE WITH COPPER BRAID (SHIELD) AND PEEK OVERBRAID INCLUDING 6 28GA. WIRES WITH CZ1105 PFA INSULATION	2	40in. 40in.*
5	COPPER BRAID CONTINENTAL PART #24x3x40BC	CONTINENTAL CORDAGE PART # 24x3x40BC	2	40in. 40in.*
6	PEEK BRAID PART #6759	PART #6759 MANUFACTURED WITH ZEUS 0.016" BLACK PEEK DRAWN MONOFILAMENT	2	40in. 40in.*
7	PARKER# 4 TIZ-188-SS	1/4" TUBE INSERT 1/4" LENGTH 0.188" o.d.	2	
8	GLENAIR # 600-052 or BAND-IT # A10086	GLENAIR # 600-052 STANDARD BRAID CLAMP or BAND-IT PART # A10086 (0.240" WIDE) ("BAG OF 100" # A10089)	2	
9	GLENAIR # 600-057 or BAND-IT # A31186	GLENAIR # 600-057 STANDARD BRAID CLAMP or BAND-IT PART # A31186 (0.120" WIDE) ("BAG OF 100" # A31189)	2	
10	HELICOIL #1185-04EN336	#4-40 Nitronic 60® HELICOIL 0.336" LENGTH	2	

* NOTE: USE WHATEVER LENGTH IS NECESSARY FOR THE INTERNAL WIRING OF THE CONNECTORS AND STRIP LENGTH TO ACHIEVE THE CORRECT OVERALL LENGTHS.

NOTES: (UNLESS OTHERWISE SPECIFIED)

A. MATERIAL: a. J1 CONNECTOR SHELL - GOLD OVER ELECTRO-LESS NICKEL SELECTIVELY METALIZED PEEK VICTREX 450GL30.
b. BACKSHELL - STAINLESS STEEL WITH VENT HOLE.
c. CONTACTS - BERYLLIUM COPPER ALLOY C17300 0.000050 MIN. GOLD OVER NICKEL.
d. HARDWARE: STAINLESS STEEL, PASSIVATED.
e. PEEK BRAID - PEEK VICTREX GRADE TDS-450CA30 CARBON LOADED - SUPPLIED BY LIGO.

B. CABLE 6 COND. 28 AWG. (40 STRD 44 AWG.) WITH PFA INSULATION COONER WIRE # CZ1105. OVERALL 40AWG COPPER BRAID 90% COVERAGE - SUPPLIED BY LIGO. OVERALL PEEK BRAID MIN. 50% COVERAGE - SUPPLIED BY LIGO. OVERALL CABLE O.D. WILL BE APPROX. 0.240 IN.

C. CONNECTORS WILL BE SUPPLIED WITH HARDWARE SCREWS SHOULD BE THE PROPER LENGTH FOR MATING.

V25T CABLE ASSEMBLY CIRCUIT SUMMARY V-DB25 M/S1-40,40-2_QPD

FROM					TO				
CONNECTOR J1 - 25 PIN SUBMINI-D MALE CONNECTOR SELECTIVELY METALIZED (PEEK)					CONNECTOR J2 - QPD FEMALE CONNECTOR (PEEK)			PCB CONNECTION	
PIN	WIRE NAME	COLOR	LENGTH	TWISTED PAIR	PIN	WIRE NAME	SIGNAL		
1, SHELL	SHIELD (BRAID)		40 in.*		CONNECTED ONLY TO BRAID CLAMP	SHIELD (BRAID)	SHIELD		N/C
13	(CABLE 1) WIRE 13	White	40 in.*	TP-1	A4	(CABLE 1) WIRE 13	QPD 1 ANODE 4		A4
25	(CABLE 1) WIRE 25	White	40 in.*		A3	(CABLE 1) WIRE 25	QPD 1 ANODE 3		A3
12	(CABLE 1) WIRE 12	White	40 in.*		A2	(CABLE 1) WIRE 12	QPD 1 ANODE 2		A2
24	(CABLE 1) WIRE 24	White	40 in.*	TP-2	A1	(CABLE 1) WIRE 24	QPD 1 ANODE 1		A1
11	(CABLE 1) WIRE 11	White	40 in.*	TP-3	S	(CABLE 1) WIRE 11	QPD 1 SENSE		S
23	(CABLE 1) WIRE 23	White	40 in.*		CAT	(CABLE 1) WIRE 23	QPD 1 CATHODE		CAT
					CONNECTOR J3 - QPD FEMALE CONNECTOR (PEEK)			PCB CONNECTION	
					PIN	WIRE NAME	SIGNAL		
					CONNECTED ONLY TO BRAID CLAMP	SHIELD (BRAID)	SHIELD		N/C
10	(CABLE 2) WIRE 10	White	40 in.*	TP-4	A4	(CABLE 2) WIRE 10	QPD 2 ANODE 4		A4
22	(CABLE 2) WIRE 22	White	40 in.*		A3	(CABLE 2) WIRE 22	QPD 2 ANODE 3		A3
9	(CABLE 2) WIRE 9	White	40 in.*		A2	(CABLE 2) WIRE 9	QPD 2 ANODE 2		A2
21	(CABLE 2) WIRE 21	White	40 in.*	TP-5	A1	(CABLE 2) WIRE 21	QPD 2 ANODE 1		A1
8	(CABLE 2) WIRE 8	White	40 in.*	TP-6	S	(CABLE 2) WIRE 8	QPD 2 SENSE		S
20	(CABLE 2) WIRE 20	White	40 in.*		CAT	(CABLE 2) WIRE 20	QPD 2 CATHODE		CAT

PIN 14, 2, 15, 3, 16, 4, 17, 5, 18, 6, 19, 7 N/C (NOT CONNECTED)

* USE WHATEVER LENGTH IS NECESSARY FOR THE INTERNAL WIRING OF THE CONNECTORS AND STRIP LENGTH TO ACHIEVE THE CORRECT OVERALL LENGTHS. INCLUDE NOM. 40in. LENGTH + STRIP LENGTH + INTERNAL SERVICE LOOPS + 6in. FOR PIGTAILS.

TEST LIST	
FROM	TO
J1	J2
PIN	PIN
J1 - 1, SHELL	NOT CONNECTED
J1 - 13	J2 - A4
J1 - 25	J2 - A3
J1 - 12	J2 - A2
J1 - 24	J2 - A1
J1 - 11	J2 - S
J1 - 23	J2 - CAT
J1	J3
PIN	PIN
J1 - 1, SHELL	NOT CONNECTED
J1 - 10	J3 - A4
J1 - 22	J3 - A3
J1 - 9	J3 - A2
J1 - 21	J3 - A1
J1 - 8	J3 - S
J1 - 20	J3 - CAT

V-DB25 M/S1-40,40-2_QPD STANDARD USE FOR THIS CABLE		
SUBSYSTEM	AIR/VAC	STANDARD USE
ISC	IN-VAC	QPD'S FOR TRANSMON

NOTES AND TOLERANCES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING PER ASME Y14.5-1994

2. REMOVE ALL SHARP EDGES. 0.05-0.15 FOR MACHINED PARTS. ROUND ALL EDGES APPROXIMATELY R.02 FOR SHEET METAL PARTS.

3. DO NOT SCALE FROM DRAWING

4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

MATERIAL: Material <not specified> FINISH: μin/100

CALENDAR: CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY

PART NAME: CUSTOM CABLE SPECIFICATION V25T-40

DESIGNER: R. ABBOTT DATE: 04/17/2012 SITE: DWG. NO. E D1101654

DRAWER: E. BROWN DATE: 04/17/2012 SITE: E D1101654

CHECKER: DATE: SCALE: 2:1 PROJECTION: SHEET 1 OF 1

REV. v4