
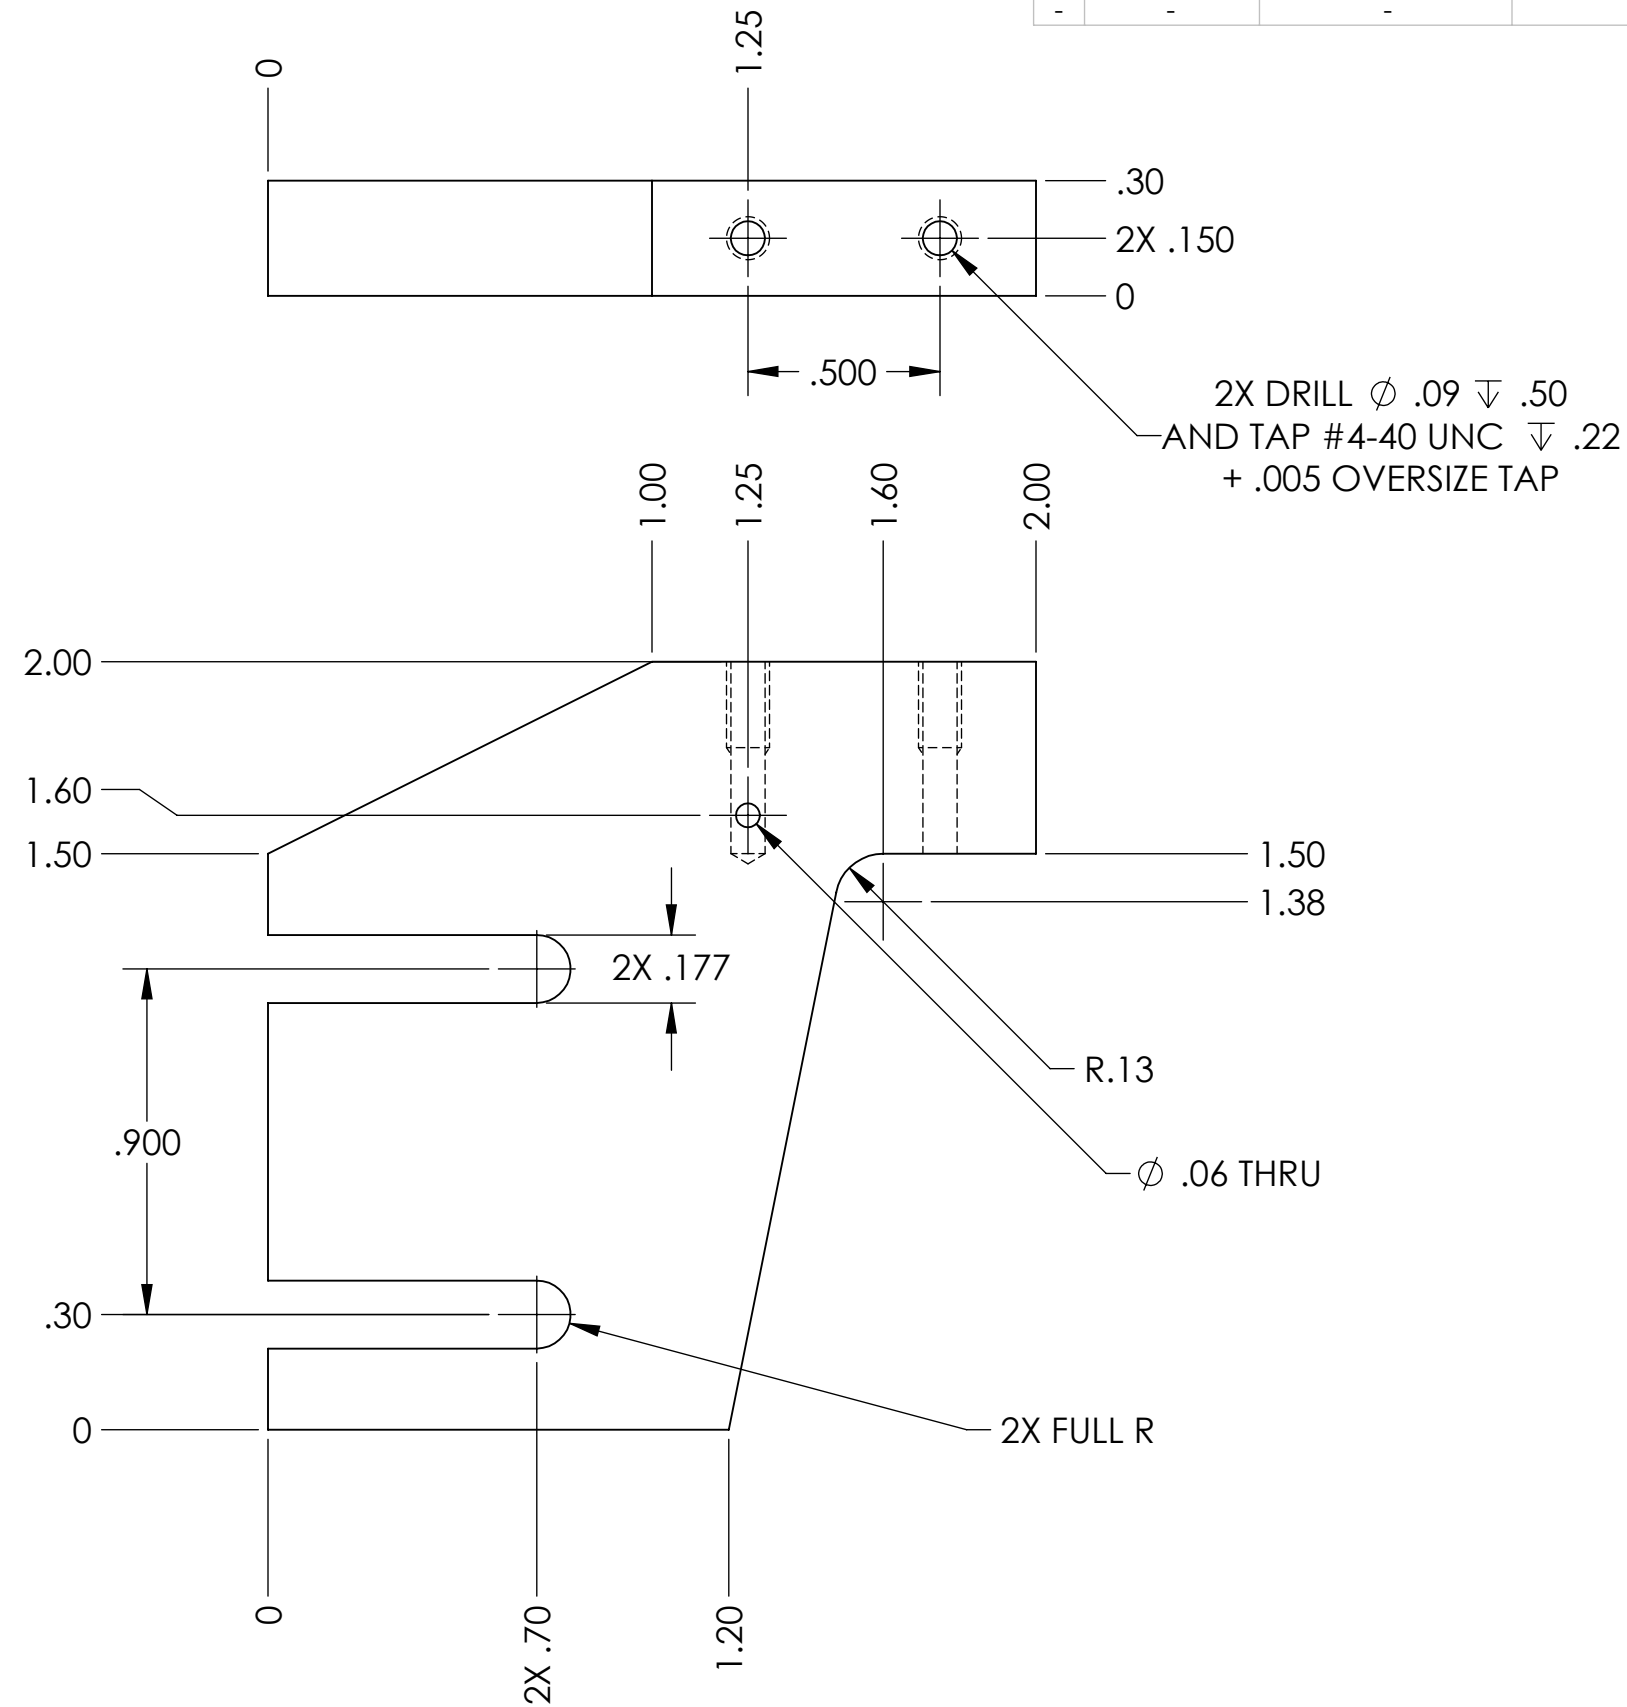


D1200537_Advanced_LIGO_SUS_HSTS_Mounting_Bracket_Lateral_Section_Coil_Holder, PART PDM REV.: DRAWING PDM REV:

NOTES CONTINUED:
 5. SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. A VIBRATORY TOOL MAY BE USED.
 EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX
 6. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH. USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED.
 7. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.

| REV. | DATE | DCN # | DRAWING TREE # |
|------|-------------|----------|----------------|
| v1 | 30 MAR 2012 | E1200330 | E1000035 |
| - | - | - | - |
| - | - | - | - |

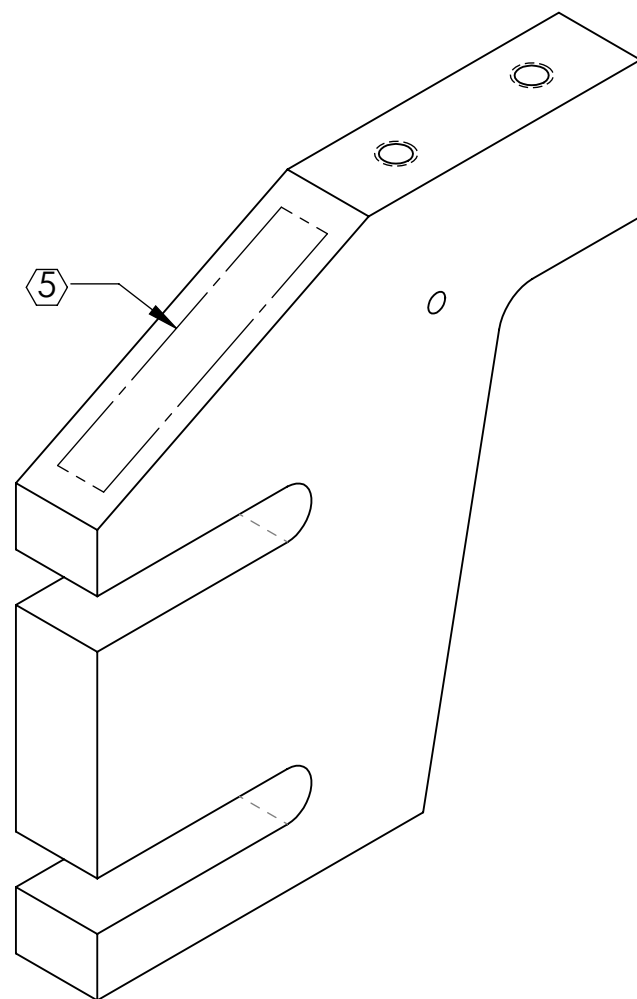

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 .XX \pm .01
 .XXX \pm .005
 ANGULAR \pm 0.5°

1. INTERPRET DRAWING PER ASME Y14.5-1994.
 2. REMOVE ALL SHARP EDGES, R.02 MIN.
 3. DO NOT SCALE FROM DRAWING.
 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

MATERIAL 6061-T6 Al FINISH 63 μ inch

| | | | |
|---|--------------------------|--|--------------------------------------|
| CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY | | PART NAME MOUNTING BRACKET LATERAL SECTION | |
| SYSTEM ADVANCED LIGO | SUB-SYSTEM SUS | DESIGNER D. BRIDGES | DATE 30 MAR 2012 |
| NEXT ASSY MOUNTING BRACKET, COIL HOLDER, HSTS | CHECKER B. MOORE | DATE 02 APR 2012 | APPROVAL |
| SIZE DWG. NO. B D1200537 | | REV. v1 | SCALE: 2:1 PROJECTION: SHEET 1 OF 1 |