
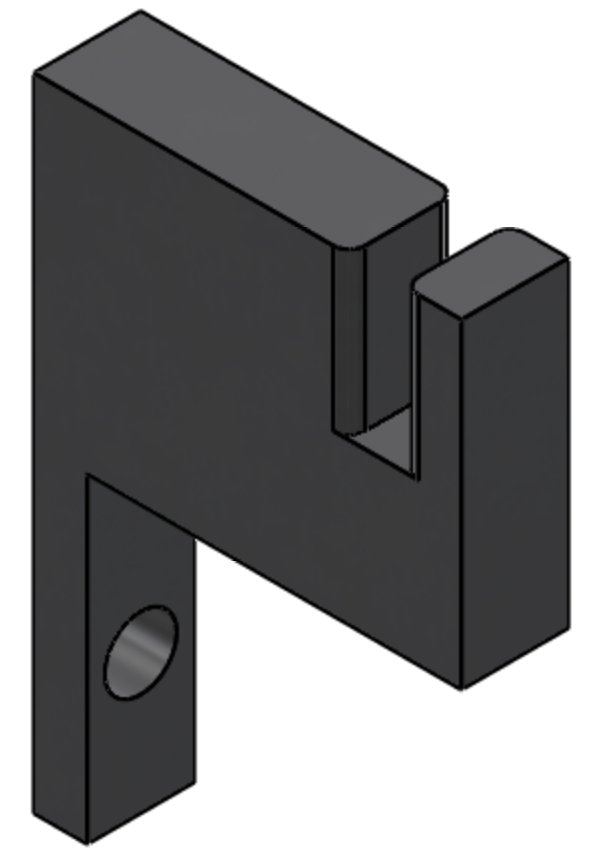
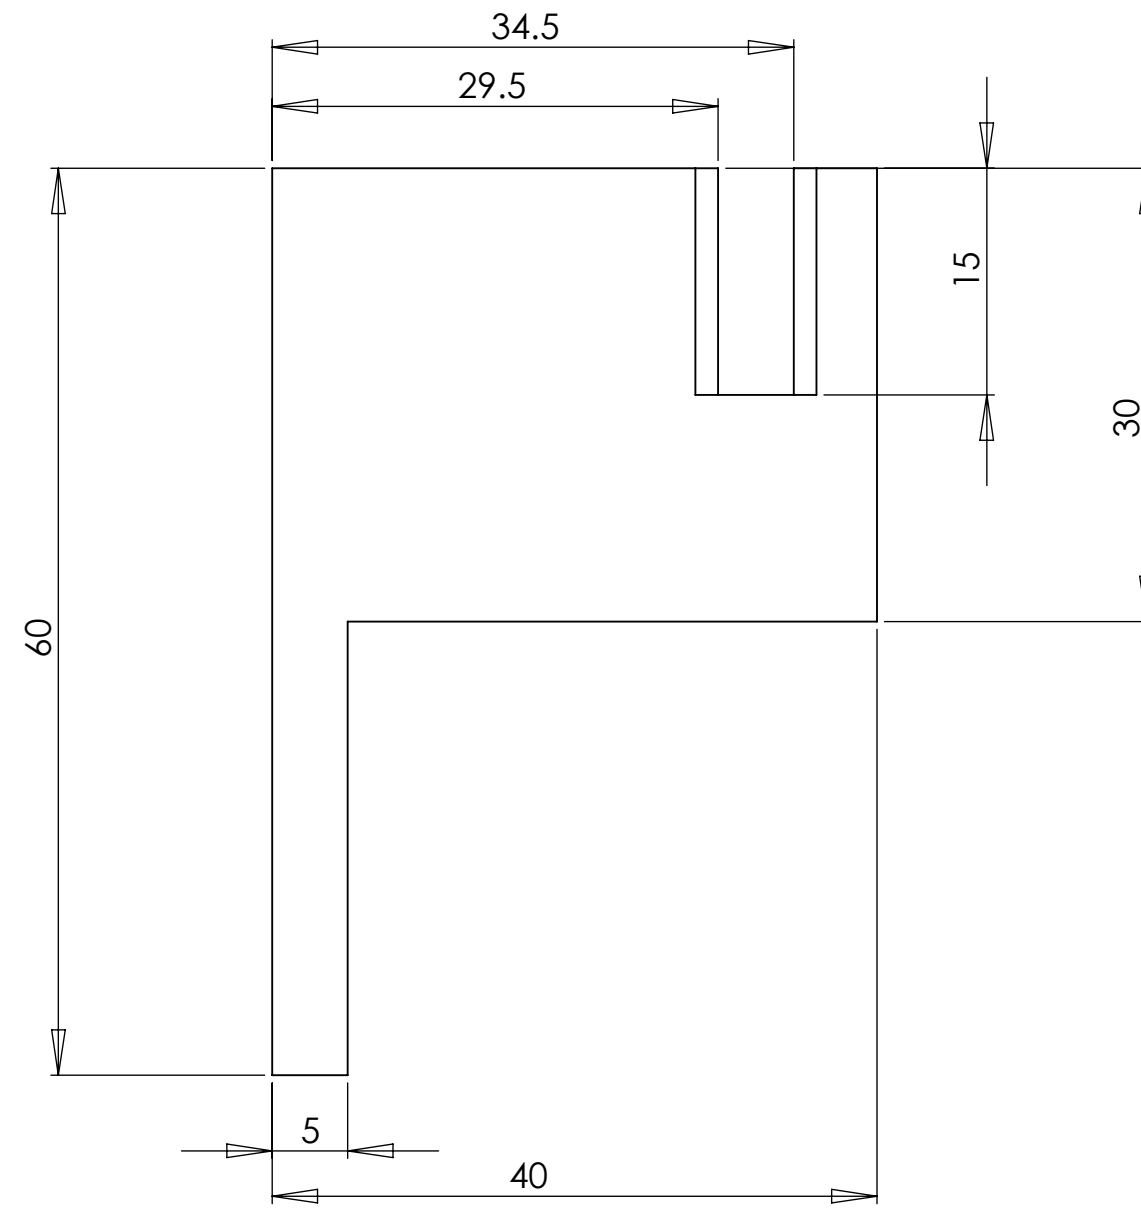
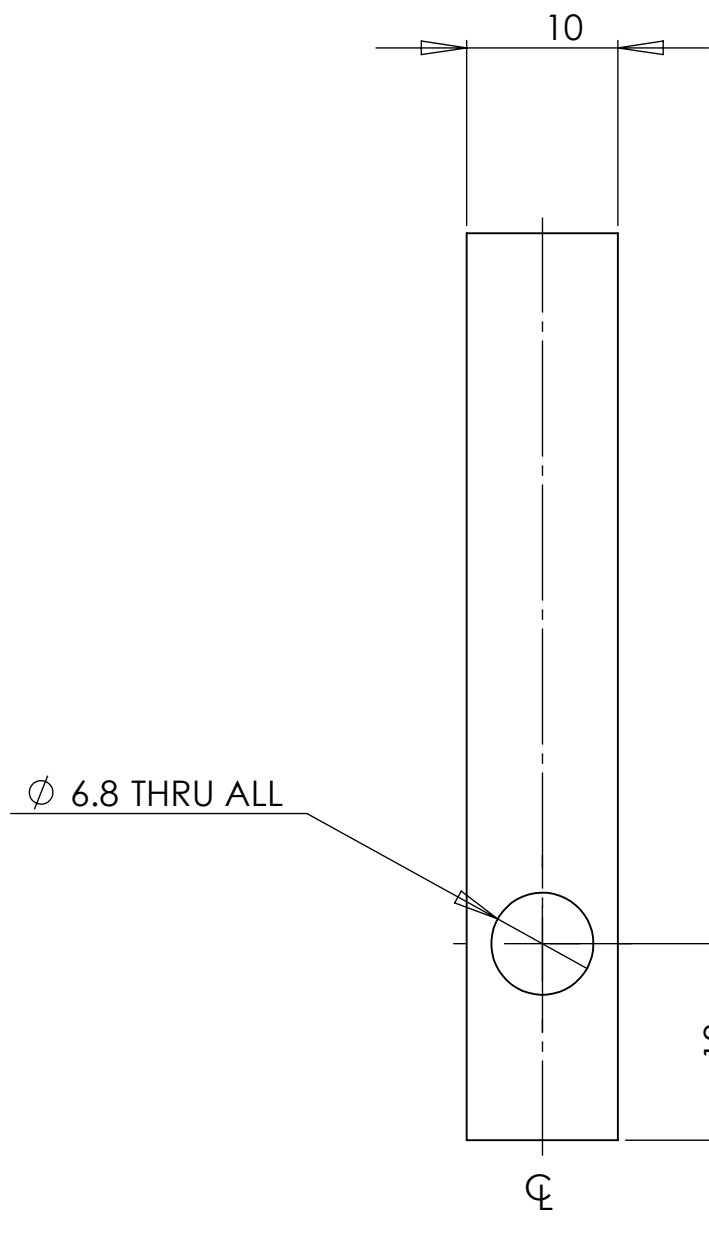


NOTES CONTINUED:

⑤ SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACE FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: DXXXXXXX-VY, S/N 001. A VIBRATORY TOOL MAY BE USED.

⑥ MACHINE ALL SURFACES.

REV.	DATE	DCN #	DRAWING TREE #

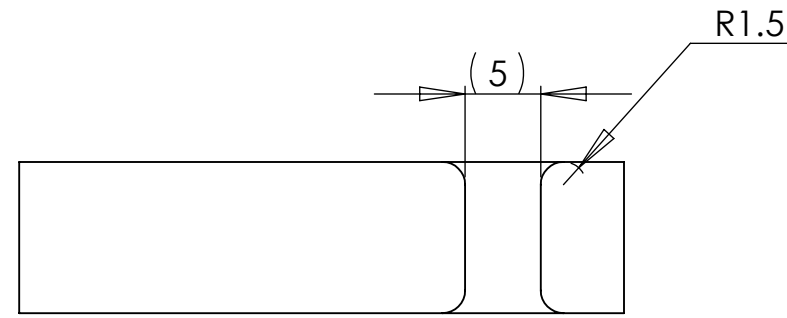

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN MM

TOLERANCES:
 .XX ± 0.10
 .XXX ± 0.010

ANGULAR ± 0.2°

1. INTERPRET DRAWING PER ASME Y14.5-1994.
2. REMOVE ALL SHARP EDGES, R.02 MIN.
3. DO NOT SCALE FROM DRAWING.
4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

MATERIAL
6061-T6 Al

FINISH
1.6 µm



SYSTEM ADVANCED LIGO **SUB-SYSTEM** SUS

NEXT ASSY

PART NAME
FIBRE SUTTER JIG FUSE END LOCATOR

DESIGNER	L.CUNNINGHAM	SIZE	DWG. NO.	REV.
DRAFTER	L.Cunningham	c	D1001957	v1
CHECKER		SCALE: 2:1	PROJECTION:	SHEET 1 OF 1
APPROVAL				