

## LOCALIZATION AND BROADBAND FOLLOW-UP OF THE GRAVITATIONAL-WAVE TRANSIENT GW150914

THE LIGO SCIENTIFIC COLLABORATION AND THE VIRGO COLLABORATION,  
THE AUSTRALIAN SQUARE KILOMETER ARRAY PATHFINDER (ASKAP) COLLABORATION, THE BOOTES COLLABORATION,  
THE DARK ENERGY SURVEY AND THE DARK ENERGY CAMERA GW-EM COLLABORATIONS, THE *Fermi* GBM COLLABORATION,  
THE *Fermi* LAT COLLABORATION, THE GRAVITATIONAL WAVE INAF TEAM (GRAWITA), THE *INTEGRAL* COLLABORATION,  
THE INTERMEDIATE PALOMAR TRANSIENT FACTORY (IPTF) COLLABORATION, THE INTERPLANETARY NETWORK,  
THE J-GEM COLLABORATION, THE LA SILLA-QUEST SURVEY, THE LIVERPOOL TELESCOPE COLLABORATION,  
THE LOW FREQUENCY ARRAY (LOFAR) COLLABORATION, THE MASTER COLLABORATION, THE MAXI COLLABORATION,  
THE MURCHISON WIDE-FIELD ARRAY (MWA) COLLABORATION, THE PAN-STARRS COLLABORATION,  
THE PESSTO COLLABORATION, THE PI OF THE SKY COLLABORATION, THE SKYMAPPER COLLABORATION,  
THE *Swift* COLLABORATION, THE TAROT, ZADKO, ALGERIAN NATIONAL OBSERVATORY, AND C2PU COLLABORATION,  
THE TOROS COLLABORATION, AND THE VISTA COLLABORATION

(See the end matter for the full list of authors.)

### ABSTRACT

A gravitational-wave transient was identified in data recorded by the Advanced LIGO detectors on 2015 September 14. The event, initially designated G184098 and later given the name GW150914, is described in detail elsewhere. By prior arrangement, preliminary estimates of the time, significance, and sky location of the event were shared with 63 teams of observers covering radio, optical, near-infrared, X-ray, and gamma-ray wavelengths with ground- and space-based facilities. In this Letter we describe the low-latency analysis of the gravitational wave data and present the sky localization of the first observed compact binary merger. We summarize the follow-up observations reported by 25 teams via private Gamma-ray Coordinates Network Circulars, giving an overview of the participating facilities, the gravitational wave sky localization coverage, the timeline and depth of the observations. As this event turned out to be a binary black hole merger, there is little expectation of a detectable electromagnetic signature. Nevertheless, this first broadband campaign to search for a counterpart of an Advanced LIGO source represents a milestone and highlights the broad capabilities of the transient astronomy community and the observing strategies that have been developed to pursue neutron star binary merger events. Detailed investigations of the electromagnetic data and results of the electromagnetic follow-up campaign are being disseminated in papers by the individual teams.

*Keywords:* gravitational waves; methods: observational

### 1. INTRODUCTION

In September 2015, the Advanced Laser Interferometer Gravitational-wave Observatory (LIGO; [Aasi et al. 2015](#)) made the first direct detection of an astrophysical gravitational wave (GW) signal which turned out to be from a binary black hole (BBH) merger. The LIGO Hanford and Livingston sites are the first two nodes of a growing global network of highly sensitive GW facilities, soon to include Advanced Virgo ([Acernese et al. 2015](#)), KAGRA, and LIGO-India. Some of the most promising astrophysical sources of GWs are also expected to produce broadband electromagnetic (EM) emission and neutrinos. This has created exciting new opportunities for joint broadband EM observations and multi-messenger astronomy.

In a compact binary coalescence (CBC) event, a tight binary comprised of two neutron stars (NSs), two black holes (BHs), or a NS and a BH experiences a runaway orbital decay due

to gravitational radiation. In a binary including at least one NS—a binary neutron star (BNS) or neutron star–black hole (NSBH) merger—we expect EM signatures due to energetic outflows at different timescales and wavelengths. If a relativistic jet forms, we may observe a prompt short gamma-ray burst (GRB) lasting on the order of one second or less, followed by X-ray, optical and radio afterglows of hours–days duration (e.g., [Eichler et al. 1989](#); [Narayan et al. 1992](#); [Nakar 2007](#); [Berger 2014](#); [Fong et al. 2015](#)). Rapid neutron capture in the sub-relativistic ejecta (e.g., [Lattimer & Schramm 1976](#)) is hypothesized to produce a kilonova or macronova, an optical–near infrared signal lasting hours–weeks (e.g., [Li & Paczyński 1998](#)). Eventually, we may observe a radio blast wave from this sub-relativistic outflow, detectable for months–years (e.g., [Nakar & Piran 2011](#)). Furthermore, several seconds prior to or tens of minutes after merger, we may see a coherent radio burst lasting milliseconds (e.g., [Hansen & Lyutikov 2001](#); [Zhang 2014](#)). In short, a NS binary can produce EM radiation over a wide range of wavelengths and time scales. On the other hand, in the case of a stellar-mass BBH,

the current consensus is that no significant EM counterpart emission is expected, except for those in highly improbable environments pervaded by large ambient magnetic fields or baryon densities.

The first campaign to find EM counterparts triggered by low-latency GW event candidates was carried out with the initial LIGO and Virgo detectors and several EM astronomy facilities in 2009–2010 (Abadie et al. 2012b,a; Evans et al. 2012; Aasi et al. 2014). In preparing for Advanced detector operations, the LIGO and Virgo collaborations worked with the broader astronomy community to set up an evolved and greatly expanded EM follow-up program.<sup>1</sup> Seventy-four groups with access to ground- and space-based facilities joined, of which 63 were operational during Advanced LIGO’s first observing run (O1). Details of the 2009–2010 EM follow campaign and changes for O1 are given in §1 of the Supplement (Abbott et al. 2016b).

After years of construction and commissioning, the Advanced LIGO detectors at Livingston, Louisiana, and Hanford, Washington, began observing in 2015 September with about 3.5 times the distance reach ( $> 40$  times the sensitive volume) of the earlier detectors. A strong GW event was identified shortly after the pre-run calibration process was completed. Deep analysis of this event, initially called G184098 and later given the name GW150914, is presented in Abbott et al. (2016e) and companion papers referenced therein. In this paper we describe the initial low-latency analysis and event candidate selection (§2), rapid determination of likely sky localization (§3), and the follow-up EM observations carried out by partner facilities (§4, §5). For analyses of those observations, we refer the reader to the now-public Gamma-ray Coordinates Network (GCN) Circulars<sup>2</sup> and to a number of recent papers. We end with a brief discussion of EM counterpart detection prospects for future events.

## 2. DATA ANALYSIS AND DISCOVERY

As configured for O1, four low-latency pipelines continually search for transient signals that are coincident in the two detectors within the 10 ms light travel time separating them. Coherent WaveBurst (cWB; Klimentenko et al. 2016) and Omicron+LALInference Burst (oLIB; Lynch et al. 2015) both search for un-modeled GW bursts (Abbott et al. 2016f). GST-LAL (Cannon et al. 2012; Messick et al. 2016) and Multi-Band Template Analysis (MBTA; Adams et al. 2015) search specifically for NS binary mergers using matched filtering. Since CBC waveforms can be precisely computed from general relativity, GSTLAL and MBTA are more sensitive to CBC signals than the burst search pipelines are. All four detection pipelines report candidates within a few minutes of data acquisition.

<sup>1</sup> See program description and participation information at <http://www.ligo.org/scientists/GWEMAlerts.php>.

<sup>2</sup> All Circulars related to GW150914 are collected at <http://gcn.gsfc.nasa.gov/other/GW150914.gcn3>


LIGO conducted a series of engineering runs throughout Advanced LIGO’s construction and commissioning to prepare to collect and analyze data in a stable configuration. The eighth engineering run (ER8) began on 2015 August 17 at 15:00<sup>3</sup> and critical software was frozen by August 30. The rest of ER8 was to be used to calibrate the detectors, to carry out diagnostic studies, to practice maintaining a high coincident duty cycle, and to train and tune the data analysis pipelines. Calibration was complete by September 12 and O1 was scheduled to begin on September 18. On 2015 September 14, cWB reported a burst candidate to have occurred at 09:50:45 with a network signal-to-noise ratio (S/N) of 23.45 and an estimated false alarm rate (FAR)  $< 0.371 \text{ yr}^{-1}$  based on the available (limited at that time) data statistics. Also, oLIB reported a candidate with consistent timing and S/N. No candidates were reported at this time by the low-latency GSTLAL and MBTA pipelines, ruling out a BNS or NSBH merger.

Although the candidate occurred before O1 officially began, the LIGO and Virgo collaborations decided to send an alert to partner facilities because the preliminary FAR estimate satisfied our planned alert threshold of  $1 \text{ month}^{-1}$ . Though we had not planned to disseminate real-time GCN Notices before the formal start of O1, most of the computing infrastructure was in place. Basic data quality checks were done within hours of GW150914; both interferometers were stable and the data stream was free of artifacts (Abbott et al. 2016c). A cWB sky map was available 17 min after the data were recorded, and a LALInference Burst (LIB) sky map after 14 hr. After extra data integrity checks and an update to the GCN server software, these two sky maps were communicated to observing partners in a GCN Circular nearly two days after the event occurred (GCN 18330). Mass estimates were not released in this initial Circular, and observers may have assumed the event was associated with a BNS system or a GW burst (e.g., from a nearby core-collapse supernova). The knowledge that GW150914 was consistent with a BBH inspiral and merger was only shared later, on October 3 (GCN 18388). Figure 1 shows the chronology of the GW detection alerts and follow-up observations.

The data were re-analyzed offline with two independent matched-filter searches using a template bank which includes both NS binary and BBH mergers. The waveform was confirmed to be consistent with a BBH merger and this information was shared with observers about 3 weeks after the event (GCN 18388). The FAR was evaluated with the data collected through 20 October, reported to be less than 1 in 100 years (GCN 18851; Abbott et al. 2016d), and ultimately determined to be much lower. The final results of the offline search are reported in Abbott et al. (2016e).

## 3. SKY MAPS

<sup>3</sup> All dates and times are in UT.

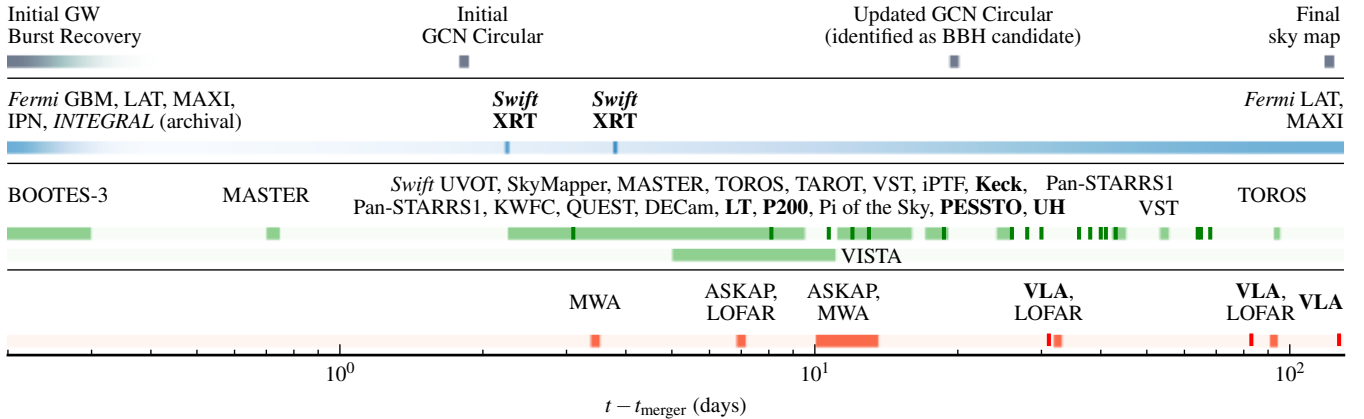

**Figure 1.** Timeline of observations of GW150914, separated by band and relative to the time of the GW trigger. The top row shows GW information releases. The bottom four rows show high-energy, optical, near-infrared, and radio observations respectively. Optical spectroscopy and narrow-field radio observations are indicated with darker tick marks and boldface text. Table 1 reports more detailed information on the times of observations made with each instrument.

We produce and disseminate probability sky maps using a sequence of algorithms with increasing accuracy and computational cost. Here, we compare four location estimates: the prompt cWB and LIB localizations that were initially shared with observing partners plus the rapid BAYESTAR localization and the final localization from LALInference. All four are shown in Fig. 2.


cWB performs a constrained maximum likelihood estimate of the reconstructed signal on a sky grid (Klimenko et al. 2016) weighted by the detectors’ antenna patterns (Essick et al. 2015) and makes minimal assumptions about the waveform morphology. With two detectors, this amounts to restricting the signal to only one of two orthogonal GW polarizations throughout most of the sky. LIB performs Bayesian inference assuming the signal is a sinusoidally modulated Gaussian (Lynch et al. 2015). While this assumption may not perfectly match the data, it is flexible enough to produce reliable localizations for a wide variety of waveforms, including BBH inspiral-merger-ringdown signals (Essick et al. 2015). BAYESTAR produces sky maps by triangulating the times, amplitudes, and phases on arrival supplied by all the CBC pipelines (Singer & Price 2016). BAYESTAR was not available promptly because the low-latency CBC searches were not configured for BBHs; the localization presented here is derived from the offline CBC search. LALInference performs full forward modeling of the data using a parameterized CBC waveform which allows for BH spins and detector calibration uncertainties (Veitch et al. 2015). It is the most accurate method for CBC signals but takes the most time due to the high dimensionality. We present the same LALInference map as Abbott et al. (2016g), with a spline interpolation procedure to include the potential effects of calibration uncertainties. The BAYESTAR and LALInference maps were shared with observers on 2016 January 13 (GCN 18858), at the con-

clusion of the O1 run. Since GW150914 is a CBC event, we consider the LALInference map to be the most accurate, authoritative, and *final* localization for this event. This map has a 90% credible region with area  $630 \text{ deg}^2$ .

All of the sky maps agree qualitatively, favoring a broad, long section of arc in the Southern hemisphere and to a lesser extent a shorter section of nearly the same arc near the equator. While the majority of LIB’s probability is concentrated in the Southern hemisphere, a non-trivial fraction of the 90% confidence region extends into the Northern hemisphere. The LALInference sky map shows much less support in the Northern hemisphere which is likely associated with the stronger constraints available with full CBC waveforms. The cWB localization also supports an isolated hot spot near  $\alpha \sim 9^{\text{h}}, \delta \sim 5^\circ$ , where the detector responses make it possible to independently measure two polarization components. In this region, cWB considers signals not constrained to have the elliptical polarization expected from a compact binary merger.

Quantitative comparisons of the four sky maps can be found in section 2 of the Supplement (Abbott et al. 2016b). The main feature in all of the maps is an annulus with polar angle  $\theta_{\text{HL}}$  determined by the arrival time difference  $\Delta t_{\text{HL}}$  between the two detectors. However, refinements are possible due to phase as well as amplitude consistency and the mildly directional antenna patterns of the LIGO detectors (Kasliwal & Nissanke 2014; Singer et al. 2014). In particular, the detectors’ antenna patterns dominate the modulation around the ring for un-modeled reconstructions through a correlation with the inferred distance of the source (Essick et al. 2015). As shown in Fig. 2, the algorithms all infer polar angles that are consistent at the  $1\sigma$  level.


#### 4. FOLLOW-UP OBSERVATIONS

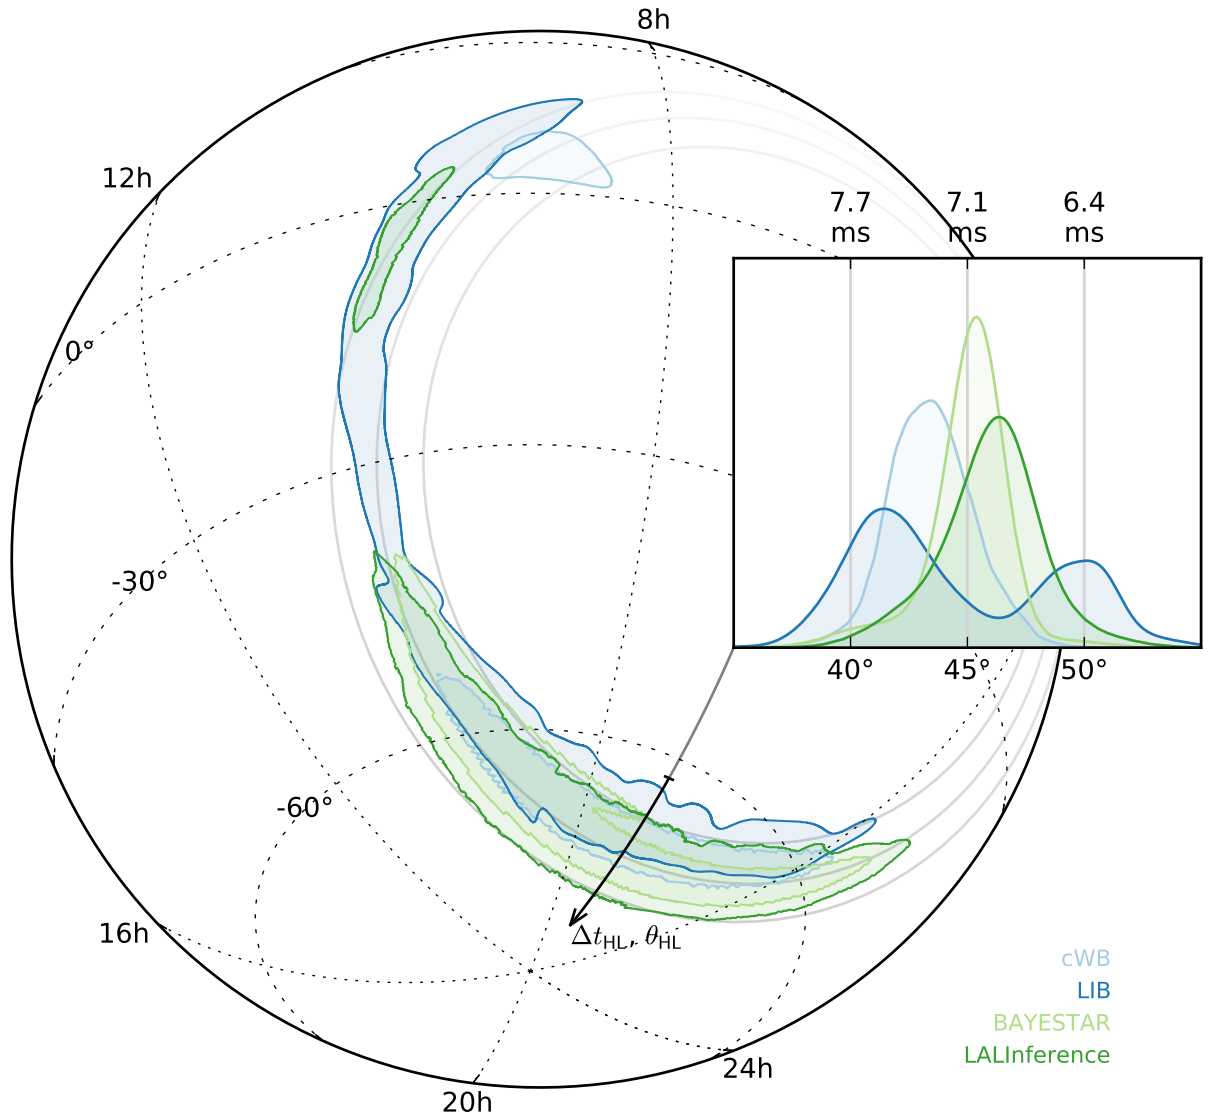

**Figure 2.** Comparison of different GW sky maps, showing the 90% credible level contours for each algorithm. This is an orthographic projection centered on the centroid of the LIB localization. The inset shows the distribution of the polar angle  $\theta_{\text{HL}}$  (equivalently, the arrival time difference  $\Delta t_{\text{HL}}$ ).

Twenty-five participating teams of observers responded to the GW alert to mobilize satellites and ground-based telescopes spanning 19 orders of magnitude in electromagnetic wavelength. Observations and archival analysis started shortly after the candidate was announced, two days after the event was recorded. Most facilities followed tiling strategies based on the cWB and LIB sky maps. Some groups, considering the possibility of a NS merger or core-collapse su-

pernova, selected fields based on the areal density of nearby galaxies or targeted the Large Magellanic Cloud (LMC) (e.g., [Annis et al. 2016](#)). Had the BBH nature of the signal been promptly available, most groups would not have favored local galaxies because LIGO’s range for BBH mergers is many times larger than for BNSs. Fig. 3 displays the footprints of all reported observations. The campaign is summarized in Table 1 in terms of instruments, depth, time and sky cover-

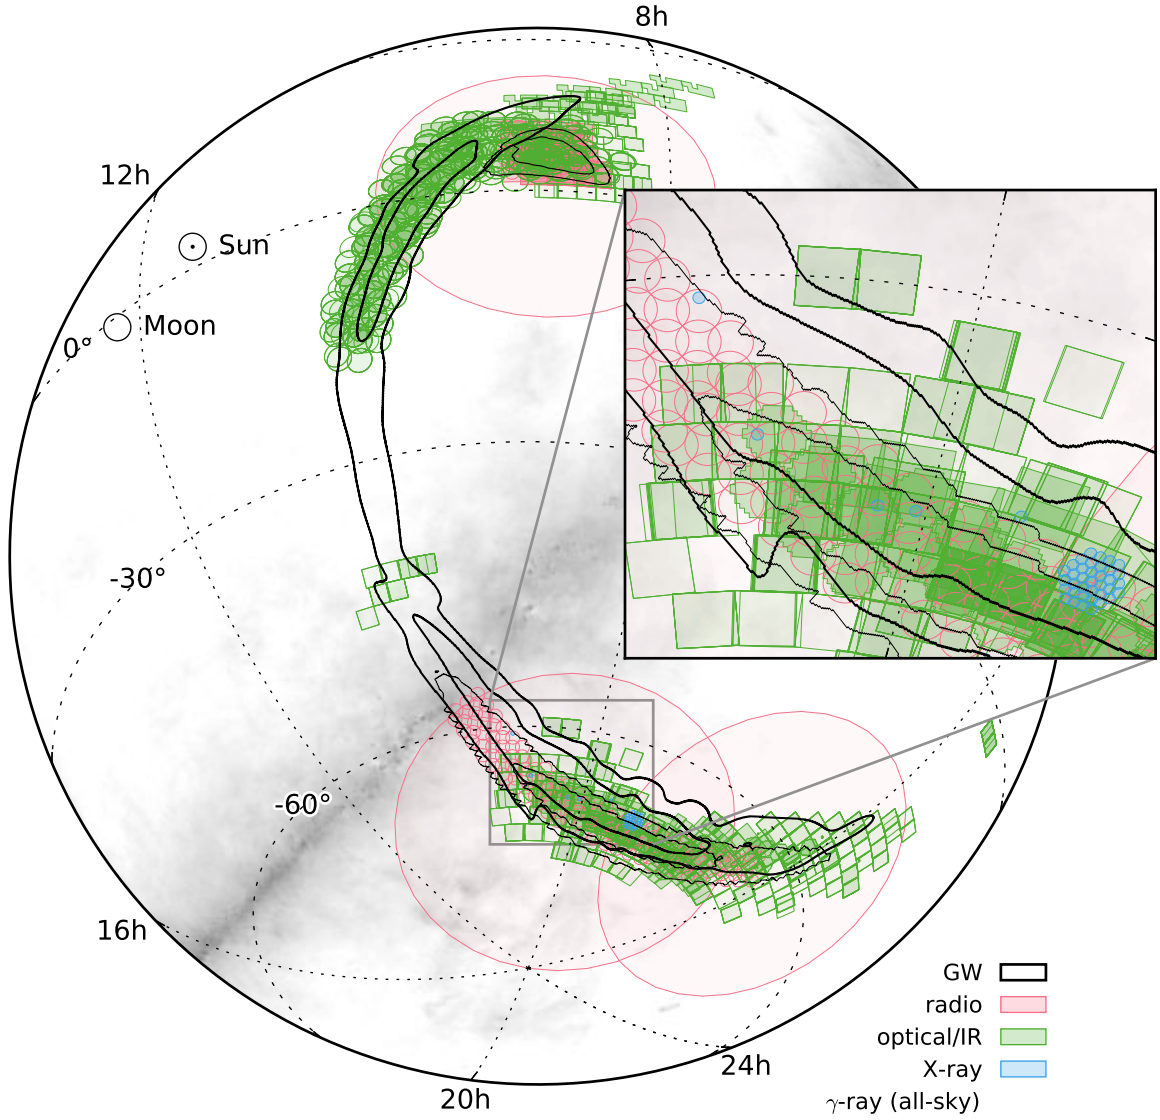

**Figure 3.** Footprints of observations in comparison with the 50% and 90% credible levels of the initially distributed GW localization maps. Radio fields are shaded red, optical/infrared fields are green, and XRT fields are blue circles. The all-sky *Fermi* GBM, LAT, *INTEGRAL* SPI-ACS, and MAXI observations are not shown. Where fields overlap, the shading is darker. The initial cWB localization is shown as thin black contour lines and the LIB localization as thick black lines. The inset highlights the *Swift* observations consisting of a hexagonal grid and a selection of the *a posteriori* most highly ranked galaxies. The [Schlegel et al. \(1998\)](#) reddening map is shown in the background to represent the Galactic plane. The projection is the same as in Fig. 2.

age. Some optical candidate counterparts were followed up spectroscopically and in the radio band as summarized in Table 2. The overall EM follow up of GW150914 consisting of broad-band tiled observations and observations to characterize candidate counterparts are described in detail in §3–5 of the Supplement (Abbott et al. 2016b).

Findings from these follow-up observations have been reported in several papers. A weak transient signal was found in *Fermi* GBM data 0.4 s after the time of GW150914 (Connaughton et al. 2016), but no corresponding signal was found in the *INTEGRAL* SPI-ACS instrument (Savchenko et al. 2016) or *AGILE* (Tavani et al. 2016). No GRB-like afterglow was found in X-rays with *Swift* XRT (Evans et al. 2016) or MAXI (Kawai et al., in preparation), in UV/optical with *Swift* UVOT (Evans et al. 2016), or at GeV energies with *Fermi* LAT (Fermi-LAT collaboration 2016). Tiled observations with wide-field optical instruments listed in Table 1 found many transients, but spectroscopy with the instruments listed in Table 2 along with further photometry showed that none of them were associated with GW150914 (Smartt et al. 2016; Soares-Santos et al. 2016; Kasliwal et al. 2016; Morokuma et al., in preparation). Annis et al. (2016) used DECam to search for a missing supergiant in the LMC, which would have been evidence for the collapse of a massive star that could have produced GWs but failed to produce a typical core-collapse supernova (SN).

## 5. COVERAGE

Using the GW data alone, we can only constrain the position of the source on the sky to an area of  $\approx 600 \text{ deg}^2$  (90% confidence). The inferred redshift is  $z = 0.09_{-0.04}^{+0.03}$ , corresponding to a luminosity distance of  $410_{-180}^{+160} \text{ Mpc}$  (Abbott et al. 2016g).

Table 1 lists the area tiled by each facility and the probability contained within those tiles, calculated with respect to the localization methods described in §3.

By far the most complete coverage of the area is at the highest energies. The *INTEGRAL* SPI-ACS provided the largest effective area in the 75 keV–1 MeV range, albeit with significantly varying detection efficiency. Owing to its nearly omnidirectional response, it had a full coverage of the GW probability map (GCN 18354; Savchenko et al. 2016). *Fermi* GBM captured 75% of the localization at the time of the GW trigger and the entire area by 25 min after (GCN 18339). *Fermi* LAT observations started 4200 s after the trigger and the entire localization continued to be observed every three hours.

Coverage in X-rays is complete down to  $10^{-9} \text{ erg cm}^{-2} \text{ s}^{-1}$  with the MAXI observations, but relatively sparse at fainter flux, with the *Swift* XRT tiles spanning about  $5 \text{ deg}^2$  and enclosing a probability of  $\sim 0.3\%$  in the energy range 0.3–10 keV to a depth of  $10^{-13}$ – $10^{-11} \text{ erg cm}^{-2} \text{ s}^{-1}$  (GCNs 18331, 18346).

Optical facilities together tiled about  $900 \text{ deg}^2$  and captured a containment probability of over 50% of the initial

LIB sky map, and slightly less for the final LALInference sky map that was available after the observations were completed. The depth varies widely among these facilities. MASTER and Pan-STARRS1 covered the most area with their observations, while large areas also were covered by the intermediate Palomar Transient Factory (iPTF), Dark Energy Camera (DECam), VLT Survey Telescope (VST@ESO) and La Silla–QUEST. The contained probability of the initial sky maps is dominated by MASTER, DECam, Pan-STARRS1, La Silla–QUEST and VST@ESO, while the final sky map is contained best by MASTER, DECam and VST@ESO. Relatively small area and contained probability were covered by facilities that targeted nearby galaxies. The only wide-field near-infrared facility, Visible and Infrared Survey Telescope (VISTA@ESO), covered  $70 \text{ deg}^2$  and captured a containment probability of 8% of the final LALInference sky map.

The radio coverage is also extensive, with a contained probability of 86%, dominated by Murchison Widefield Array (MWA) in the 118 MHz band (GCN 18345).

Table 2 lists the observations done by large telescope spectrographs and a radio facility to follow-up candidate optical counterparts. Deep photometry, broadband observations and spectroscopy identified the majority of the candidates to be normal population type Ia and type II supernova, with a few dwarf novae and active galactic nuclei (AGNs), all very likely unrelated to GW150914. Candidate classification, comparison of redshift with the GW distance, and use of source age are crucial constraints to rule candidates in and out. Detailed discussions of candidate selection, spectroscopic and broadband follow-up are presented in survey-specific publications about iPTF candidates (Kasliwal et al. 2016) and about PESSTO follow-up of Pan-STARRS1 candidates (Smartt et al. 2016).

## 6. SENSITIVITY

In the third column of Table 1 we summarize the depth of the follow-up program. We provide limiting flux, flux density, or magnitude for the different facilities. We emphasize that these limits only apply to the fraction of the sky contours that have been followed up. For example, the MWA fields have an 86% chance of containing the source’s sky location, and provide no constraints on sky locations representing the remaining 14%.

Since the follow-up program was primarily designed to search for counterparts to BNS and NSBH mergers, it is interesting to note that the observational campaign would have provided powerful constraints on such a system. A BNS coalescence could have been detected by LIGO during O1 at a distance of  $\sim 70 \text{ Mpc}$ , averaged over sky position and orientations (Martynov et al. 2016). A short GRB afterglow similar to those which have been observed by *Swift* XRT would have been detectable at that distance. Re-scaling the observed X-ray fluxes of short GRBs at 11 hours after the event would yield fluxes in the range  $2 \times 10^{-11}$  to

**Table 1.** Summary of Tiled Observations

Facility/ Instrument	Band <sup>a</sup>	Depth <sup>b</sup>	Time <sup>c</sup>	Area (deg <sup>2</sup> )	Contained probability (%)				GCN
					cWB	LIB	BSTR <sup>d</sup>	LALInf	
Gamma-ray									
<i>Fermi</i> LAT	20 MeV–300 GeV	$1.7 \times 10^{-9}$	(every 3 hr)	—	100	100	100	100	18709
<i>Fermi</i> GBM	8 keV–40 MeV	$0.7\text{--}5 \times 10^{-7}$ (0.1–1 MeV)	(archival)	—	100	100	100	100	18339
INTEGRAL	75 keV–1 MeV	$1.3 \times 10^{-7}$	(archival)	—	100	100	100	100	18354
IPN	15 keV–10 MeV	$1 \times 10^{-7}$	(archival)	—	100	100	100	100	—
X-ray									
MAXI/GSC	2–20 keV	$1 \times 10^{-9}$	(archival)	17900	95	89	92	84	19013
<i>Swift</i> XRT	0.3–10 keV	$5 \times 10^{-13}$ (gal.)	2.3, 1, 1	0.6	0.03	0.18	0.04	0.05	18331
		$2\text{--}4 \times 10^{-12}$ (LMC)	3.4, 1, 1	4.1	1.2	1.9	0.16	0.26	18346
Optical <sup>e</sup>									
DECam	<i>i, z</i>	$i < 22.5, z < 21.5$	3.9, 5, 22	100	38	14	14	11	18344, 18350
iPTF	<i>R</i>	$R < 20.4$	3.1, 3, 1	130	2.8	2.5	0.0	0.2	18337
KWFC	<i>i</i>	$i < 18.8$	3.4, 1, 1	24	0.0	1.2	0.0	0.1	18361
MASTER	C	$< 19.9$	-1.1, 7, 7	710	50	36	55	50	18333, 18390, 18903, 19021
Pan-STARRS1	<i>i</i>	$i < 19.2\text{--}20.8$	3.2, 21, 42	430	28	29	2.0	4.2	18335, 18343, 18362, 18394
La Silla–QUEST	<i>g, r</i>	$r < 21$	3.8, 5, 0.1	80	23	16	6.2	5.7	18347
SkyMapper	<i>i, v</i>	$i < 19.1, v < 17.1$	2.4, 2, 3	30	9.1	7.9	1.5	1.9	18349
<i>Swift</i> UVOT	<i>u</i>	$u < 19.8$ (gal.)	2.3, 1, 1	3	0.7	1.0	0.1	0.1	18331
		$u < 18.8$ (LMC)	3.4, 1, 1						18346
TAROT	C	$R < 18$	2.8, 5, 14	30	15	3.5	1.6	1.9	18332, 18348
TOROS	C	$r < 21$	2.5, 7, 90	0.6	0.03	0.0	0.0	0.0	18338
VST@ESO	<i>r</i>	$r < 22.4$	2.9, 6, 50	90	29	10	14	10	18336, 18397
Near Infrared									
VISTA@ESO	<i>Y, J, K<sub>S</sub></i>	$J < 20.7$	4.8, 1, 7	70	15	6.4	10	8.0	18353
Radio									
ASKAP	863.5 MHz	5–15 mJy	7.5, 2, 6	270	82	28	44	27	18363, 18655
LOFAR	145 MHz	12.5 mJy	6.8, 3, 90	100	27	1.3	0.0	0.1	18364, 18424, 18690
MWA	118 MHz	200 mJy	3.5, 2, 8	2800	97	72	86	86	18345

<sup>a</sup>Band: photon energy, optical or near-infrared filter (or C for clear, unfiltered light), wavelength range, or central frequency

<sup>b</sup>Depth: gamma/X-ray limiting flux in  $\text{erg cm}^{-2} \text{s}^{-1}$ ;  $5\sigma$  optical/IR limiting magnitude (AB); and  $5\sigma$  radio limiting spectral flux density in mJy. The reported values correspond to the faintest flux/magnitude of detectable sources in the images.

<sup>c</sup>Elapsed time in days between start of observations and the time of GW150914 (2015 September 14 09:50:45), number of repeated observations of the same area, total observation period in days

<sup>d</sup>BAYESTAR

<sup>e</sup>Searches for bright optical transients were also done by BOOTES-3 and Pi of the Sky. Details are given in the Supplement (Abbott et al. 2016b)

**Table 2.** Summary of Follow-up Observations

Spectroscopic follow-up						
Instr.	n. of cand.	Disc. Survey	Epochs	$\lambda$ (Å)	$\Delta\lambda^a$ (Å)	GCN
KeckII+DEIMOS	8	iPTF	1	4650 – 9600	3.5	<a href="#">18337</a> , <a href="#">18341</a>
LT+SPRAT	1	Pan-STARRS1	1	4500 – 7500	18	<a href="#">18370</a> , <a href="#">18371</a>
NTT+EFOSC2	10	QUEST/Pan-STARRS1	1	3650 – 9250	18	<a href="#">18359</a> , <a href="#">18395</a>
P200+DBSP	1	Pan-STARRS1	1	3200 – 9000	4 – 8	<a href="#">18372</a>
UH2.2m+SNIFS	9	Pan-STARRS1	1	3200 – 10000	4 – 6	—
Radio follow-up						
Instrument	n. of cand.	Discovery Survey	Epochs	Freq. (GHz)	Lim. Flux <sup>b</sup> (uJy)	GCN
VLA	1	iPTF	3	6	$\lesssim 50$	<a href="#">18420</a> , <a href="#">18474</a> , <a href="#">18914</a>

<sup>a</sup>FWHM resolution<sup>b</sup> $5\sigma$ , 2 GHz nominal bandwidth,  $\approx 20$  min on-source



$6 \times 10^{-8} \text{ erg cm}^{-2} \text{ s}^{-1}$  (Berger 2014). Kilonova emission from a BNS merger at that distance would reach a peak apparent magnitude of 17–24 within a week or two after the merger (e.g., Metzger et al. 2010; Barnes & Kasen 2013; Tanaka & Hotokezaka 2013; Grossman et al. 2014). This range overlaps with the depth reached in the optical and near-IR bands. Finally, this BNS system might produce radio emission from tens of  $\mu\text{Jy}$  to tens of mJy (e.g., Hotokezaka & Piran 2015) with different timescales spanning weeks to years. Tables 1 and 2 show that the radio observations from wide field facilities were sensitive to mJy flux densities at low frequencies where fainter sources with longer timescales are expected, while the narrow field VLA was sensitive to well localized radio transients down to  $\mu\text{Jy}$  flux densities at frequencies above a few GHz.

## 7. CONCLUSIONS

GW150914 is consistent with the inspiral and merger of two BHs of masses  $36_{-4}^{+5}$  and  $29_{-4}^{+4} M_{\odot}$  respectively, resulting in the formation of a final BH of mass  $62_{-4}^{+4} M_{\odot}$  (Abbott et al. 2016e). In classical general relativity, a *vacuum* BBH merger does not produce any EM or particle emission whatsoever. Whereas supermassive BBHs in galactic centers may appear as dual AGNs or have other distinctive EM signatures due to interactions with gas or magnetic fields, stellar BBH systems are not expected to possess detectable EM counterparts. The background gas densities and magnetic field strengths should therefore be typical of the interstellar medium, which are many orders of magnitude smaller than the environments of EM bright supermassive BBHs. Although GW150914 is loud in GWs and expected to be absent in all EM bands, thorough follow-up observations were pursued to check for EM emission. Future EM follow-ups of GW sources will shed light on the presence or absence of firm EM counterparts and astrophysical processes that may trigger EM emission from these systems.

The EM campaign following GW150914 successfully demonstrates the capability of the observing partners to cover large swaths of the sky localization area, to identify candidates, and to activate larger telescopes for photometric and spectroscopic characterization within a few days of an event. We note that the information about the source’s BBH nature and updated sky maps were sent out twenty days and four months after the event, respectively. This resulted in some instruments covering much less of the probability region or to the required depth of GW150914 than they may have planned for. We expect future alerts to be issued within tens of minutes with more information about the signal type, and more rapid updates of the maps. The follow-up efforts would have been sensitive to a wide range of emission expected from BNS or NSBH mergers. However, the widely variable sensitivity reached across the sky localization area continues to be a challenge for an EM counterpart search.

The number of galaxies (with luminosities  $L \geq 0.1L^*$ ;

Blanton et al. 2003) within the comoving volume of  $10^{-2} \text{ Gpc}^3$  corresponding to the 90% credible area of the LALInference sky map and within the 90% confidence interval distance is  $\sim 10^5$ . Such a number makes it impossible to identify the host galaxy in the absence of an EM counterpart detection. The presence of a third GW detector such as Virgo would have improved the sky localization of GW150914 to a few tens of square degrees both for the un-modeled and CBC searches. The future addition of more GW detectors to the global network (Abbott et al. 2016a) will significantly improve the efficiency of searches for EM counterparts.

In summary, we have described the EM follow-up program carried out for the first GW source detected by Advanced LIGO. Within two days of the initial tentative detection of GW150914 a GCN circular was sent to EM follow-up partners alerting them to the event and providing them with initial sky maps. Twenty-five EM observing teams mobilized their resources, and over the ensuing three months observations were performed with a diverse array of facilities over a broad wavelength range (from radio to  $\gamma$ -ray). Findings from those observations are being disseminated in other papers. The localization and broadband follow-up of this GW event constitutes an important first step in a new era of gravitational wave multi-messenger astronomy.

See the Supplement (Abbott et al. 2016b) for a full list of acknowledgements. This is LIGO document LIGO-P1500227-v11.

## REFERENCES

- Aasi, J., Abadie, J., Abbott, B. P., et al. 2014, *ApJS*, 211, 7  
Aasi, J., Abbott, B. P., Abbott, R., et al. 2015, *Classical and Quantum Gravity*, 32, 074001  
Abadie, J., Abbott, B. P., Abbott, R., et al. 2012a, *A&A*, 541, A155  
—, 2012b, *A&A*, 539, A124  
Abbott, B., et al. 2016a, *Living Reviews in Relativity*, 19, 1  
—, 2016b, arXiv:1604.07864,  
<https://dcc.ligo.org/LIGO-P1600137/public/main>  
Abbott, B. P., et al. 2016c, arXiv:1602.03844,  
<https://dcc.ligo.org/LIGO-P1500238/public/main>  
—, 2016d, arXiv:1602.03839,  
<https://dcc.ligo.org/LIGO-P1500269/public/main>  
—, 2016e, *Phys. Rev. Lett.*, 116, 061102,  
<https://dcc.ligo.org/LIGO-P150914/public/main>  
—, 2016f, arXiv:1602.03843,  
<https://dcc.ligo.org/LIGO-P1500229/public/main>  
—, 2016g, arXiv:1602.03840,  
<https://dcc.ligo.org/LIGO-P1500218/public/main>  
Acernese, F., Agathos, M., Agatsuma, K., et al. 2015, *Classical and Quantum Gravity*, 32, 024001  
Adams, T., Buskulic, D., Germain, V., et al. 2015, *ArXiv e-prints*, arXiv:1512.02864  
Annis, J., Soares-Santos, M., Berger, E., et al. 2016, *ArXiv e-prints*, arXiv:1602.04199  
Bannister, K., Marvil, J., Heywood, I., et al. 2015a, *GCN*, 18363, 1  
—, 2015b, *GCN*, 18655, 1  
Barnes, J., & Kasen, D. 2013, *ApJ*, 775, 18

- Berger, E. 2014, *ARA&A*, 52, 43
- Blackburn, L., Briggs, M. S., Burns, E., et al. 2015, GCN, 18339, 1
- Blanton, M. R., Hogg, D. W., Bahcall, N. A., et al. 2003, *ApJ*, 592, 819
- Brocato, E., Branchesi, M., Campana, S., et al. 2015a, GCN, 18336, 1
- Brocato, E., Branchesi, M., Grado, A., et al. 2015b, GCN, 18397, 1
- Broderick, J., Jonker, P. G., Fender, R. P., et al. 2015a, GCN, 18364, 1
- 2015b, GCN, 18424, 1
- Campbell, H., Lyman, J., Fraser, M., et al. 2015, GCN, 18395, 1
- Cannon, K., Cariou, R., Chapman, A., et al. 2012, *ApJ*, 748, 136
- Chambers, K., Huber, M., Magnier, E., et al. 2015, GCN, 18335, 1
- Colazo, C., Lambas, D. G., Sanchez, B., et al. 2015, GCN, 18338, 1
- Connaughton, V., Burns, E., Goldstein, A., et al. 2016, ArXiv e-prints, arXiv:1602.03920
- Eichler, D., Livio, M., Piran, T., & Schramm, D. N. 1989, *Nature*, 340, 126
- Essick, R., Vitale, S., Katsavounidis, E., Vedovato, G., & Klimenko, S. 2015, *ApJ*, 800, 81
- Evans, P. A., Kennea, J. A., Barthelmy, S., et al. 2015a, GCN, 18331, 1
- 2015b, GCN, 18346, 1
- Evans, P. A., Fridriksson, J. K., Gehrels, N., et al. 2012, *ApJS*, 203, 28
- Evans, P. A., Kennea, J. A., Barthelmy, S. D., et al. 2016, *MNRAS*, arXiv:1602.03868
- Fermi-LAT collaboration. 2016, ArXiv e-prints, arXiv:1602.04488
- Ferrigno, C., Savchenko, V., Mereghetti, S., et al. 2015, GCN, 18354, 1
- Fong, W., Berger, E., Margutti, R., & Zauderer, B. A. 2015, *ApJ*, 815, 102
- Grossman, D., Korobkin, O., Rosswog, S., & Piran, T. 2014, *MNRAS*, 439, 757
- Hansen, B. M. S., & Lyutikov, M. 2001, *MNRAS*, 322, 695
- Hotokezaka, K., & Piran, T. 2015, *MNRAS*, 450, 1430
- Kaplan, D., Croft, S., Bannister, K., et al. 2015, GCN, 18345, 1
- Kasliwal, M. M., Cenko, S. B., Cao, Y., et al. 2015, GCN, 18341, 1
- Kasliwal, M. M., & Nissanke, S. 2014, *ApJL*, 789, L5
- Kasliwal, M. M., Cenko, S. B., Singer, L. P., et al. 2016, ArXiv e-prints, arXiv:1602.08764
- Klimenko, S., Vedovato, G., Drago, M., et al. 2016, *Phys. Rev. D*, 93, 042004
- Klotz, A., & Boer, M. 2015, GCN, 18348, 1
- Klotz, A., Boer, M., et al. 2015, GCN, 18332, 1
- Lattimer, J. M., & Schramm, D. N. 1976, *ApJ*, 210, 549
- Li, L.-X., & Paczyński, B. 1998, *ApJL*, 507, L59
- LIGO Scientific Collaboration, & Virgo. 2015a, GCN, 18330, 1
- 2015b, GCN, 18388, 1
- 2016a, GCN, 18858, 1
- 2016b, GCN, 18851, 1
- Lipunov, V., Gorbvskoy, E., Tyurina, N., et al. 2015a, GCN, 18333, 1
- 2016a, GCN, 19021, 1
- 2016b, GCN, 18903, 1
- Lipunov, V. M., Gorbvskoy, E. S., Buckley, D., et al. 2015b, GCN, 18390, 1
- Lynch, R., Vitale, S., Essick, R., Katsavounidis, E., & Robinet, F. 2015, ArXiv e-prints, arXiv:1511.05955
- Martynov, D. V., Hall, E. D., Abbott, B. P., et al. 2016, ArXiv e-prints, arXiv:1604.00439
- Messick, C., Blackburn, K., Brady, P., et al. 2016, ArXiv e-prints, arXiv:1604.04324
- Metzger, B. D., Martínez-Pinedo, G., Darbha, S., et al. 2010, *MNRAS*, 406, 2650
- Morokuma, T., Tanaka, M., Yoshida, M., et al. 2015, GCN, 18361, 1
- Nakar, E. 2007, *Phys. Rep.*, 442, 166
- Nakar, E., & Piran, T. 2011, *Nature*, 478, 82
- Narayan, R., Paczynski, B., & Piran, T. 1992, *ApJL*, 395, L83
- Omodei, N., McEnery, J., & Vianello, G. 2015, GCN, 18709, 1
- 2015b, GCN, 18474, 1
- 2016, GCN, 18914, 1
- Rabinowitz, D., Baltay, C., Ellman, N., et al. 2015, GCN, 18347, 1
- Rowlinson, A., Broderick, J., Jonker, P., et al. 2015, GCN, 18690, 1
- Savchenko, V., Ferrigno, C., Mereghetti, S., et al. 2016, *ApJL*, 820, L36
- Schlegel, D. J., Finkbeiner, D. P., & Davis, M. 1998, *ApJ*, 500, 525
- Serino, M., Negro, H., Kawai, N., et al. 2016, GCN, 19013, 1
- Singer, L. P., Kasliwal, M. M., Cenko, S. B., et al. 2015, GCN, 18337, 1
- Singer, L. P., & Price, L. R. 2016, *Phys. Rev. D*, 93, 024013
- Singer, L. P., Price, L. R., Farr, B., et al. 2014, *ApJ*, 795, 105
- Smartt, S. J., Kupfer, T., Chambers, K., et al. 2015a, GCN, 18372, 1
- Smartt, S. J., Smith, K. W., Chambers, K., et al. 2015b, GCN, 18362, 1
- 2015c, GCN, 18394, 1
- 2015d, GCN, 18343, 1
- Smartt, S. J., Chambers, K. C., Smith, K. W., et al. 2016, ArXiv e-prints, arXiv:1602.04156
- Soares-Santos, M., Annis, J., Berger, E., et al. 2015a, GCN, 18344, 1
- 2015b, GCN, 18350, 1
- Soares-Santos, M., Kessler, R., Berger, E., et al. 2016, ArXiv e-prints, arXiv:1602.04198
- Steele, I. A., Copperwheat, C. M., Piascik, A. S., et al. 2015a, GCN, 18370, 1
- 2015b, GCN, 18371, 1
- Takats, K., Agliozzo, C., Razza, A., et al. 2015, GCN, 18359, 1
- Tanaka, M., & Hotokezaka, K. 2013, *ApJ*, 775, 113
- Tanvir, N. R., Levan, A. J., White, D., et al. 2015, GCN, 18353, 1
- Tavani, M., Pittori, C., Verrecchia, F., et al. 2016, ArXiv e-prints, arXiv:1604.00955
- Veitch, J., Raymond, V., Farr, B., et al. 2015, *Phys. Rev. D*, 91, 042003
- Yuan, F., Wolf, C., Scalzo, R., & Schmidt, B. 2015, GCN, 18349, 1
- Zhang, B. 2014, *ApJL*, 780, L21

## AUTHORS

B. P. ABBOTT<sup>1</sup>, R. ABBOTT<sup>1</sup>, T. D. ABBOTT<sup>2</sup>, M. R. ABERNATHY<sup>1</sup>, F. ACERNESE<sup>3,4</sup>, K. ACKLEY<sup>5</sup>, C. ADAMS<sup>6</sup>, T. ADAMS<sup>7</sup>, P. ADDESSO<sup>3</sup>, R. X. ADHIKARI<sup>1</sup>, V. B. ADYA<sup>8</sup>, C. AFFELDT<sup>8</sup>, M. AGATHOS<sup>9</sup>, K. AGATSUMA<sup>9</sup>, N. AGGARWAL<sup>10</sup>, O. D. AGUIAR<sup>11</sup>, L. AIELLO<sup>12,13</sup>, A. AIN<sup>14</sup>, P. AJITH<sup>15</sup>, B. ALLEN<sup>8,16,17</sup>, A. ALLOCCA<sup>18,19</sup>, P. A. ALTIN<sup>20</sup>, S. B. ANDERSON<sup>1</sup>, W. G. ANDERSON<sup>16</sup>, K. ARAI<sup>1</sup>, M. C. ARAYA<sup>1</sup>, C. C. ARCENEUX<sup>21</sup>, J. S. AREEDA<sup>22</sup>, N. ARNAUD<sup>23</sup>, K. G. ARUN<sup>24</sup>, S. ASCENZI<sup>25,13</sup>, G. ASHTON<sup>26</sup>, M. AST<sup>27</sup>, S. M. ASTON<sup>6</sup>, P. ASTONE<sup>28</sup>, P. AUFMUTH<sup>8</sup>, C. AULBERT<sup>8</sup>, S. BABAK<sup>29</sup>, P. BACON<sup>30</sup>, M. K. M. BADER<sup>9</sup>, P. T. BAKER<sup>31</sup>, F. BALDACCINI<sup>32,33</sup>, G. BALLARDIN<sup>34</sup>, S. W. BALLMER<sup>35</sup>, J. C. BARAYOGA<sup>1</sup>, S. E. BARCLAY<sup>36</sup>, B. C. BARISH<sup>1</sup>, D. BARKER<sup>37</sup>, F. BARONE<sup>3,4</sup>, B. BARR<sup>36</sup>, L. BARSOTTI<sup>10</sup>, M. BARSUGLIA<sup>30</sup>, D. BARTA<sup>38</sup>, S. BARTHELMY<sup>39</sup>, J. BARTLETT<sup>37</sup>, I. BARTOS<sup>40</sup>, R. BASSIRI<sup>41</sup>, A. BASTI<sup>18,19</sup>, J. C. BATCH<sup>37</sup>, C. BAUNE<sup>8</sup>, V. BAVIGADDA<sup>34</sup>, M. BAZZAN<sup>42,43</sup>, B. BEHNKE<sup>29</sup>, M. BEJGER<sup>44</sup>, A. S. BELL<sup>36</sup>, C. J. BELL<sup>36</sup>, B. K. BERGER<sup>1</sup>, J. BERGMAN<sup>37</sup>, G. BERGMANN<sup>8</sup>, C. P. L. BERRY<sup>45</sup>, D. BERSANETTI<sup>46,47</sup>, A. BERTOLINI<sup>9</sup>, J. BETZWIESER<sup>6</sup>, S. BHAGWAT<sup>35</sup>, R. BHANDARE<sup>48</sup>, I. A. BILENKO<sup>49</sup>, G. BILLINGSLEY<sup>1</sup>, J. BIRCH<sup>6</sup>, R. BIRNEY<sup>50</sup>, S. BISCANS<sup>10</sup>, A. BISHT<sup>8,17</sup>, M. BITOSSI<sup>34</sup>, C. BIWER<sup>35</sup>, M. A. BIZOUARD<sup>23</sup>, J. K. BLACKBURN<sup>1</sup>, C. D. BLAIR<sup>51</sup>, D. G. BLAIR<sup>51</sup>, R. M. BLAIR<sup>37</sup>, S. BLOEMEN<sup>52</sup>, O. BOCK<sup>8</sup>, T. P. BODIYA<sup>10</sup>, M. BOER<sup>53</sup>, G. BOGAERT<sup>53</sup>, C. BOGAN<sup>8</sup>, A. BOHE<sup>29</sup>, P. BOJTOS<sup>54</sup>, C. BOND<sup>45</sup>, F. BONDU<sup>55</sup>, R. BONNAND<sup>7</sup>, B. A. BOOM<sup>9</sup>, R. BORK<sup>1</sup>, V. BOSCHI<sup>18,19</sup>,

S. BOSE<sup>56,14</sup>, Y. BOUFFANAIS<sup>30</sup>, A. BOZZI<sup>34</sup>, C. BRADASCHIA<sup>19</sup>, P. R. BRADY<sup>16</sup>, V. B. BRAGINSKY<sup>49</sup>,  
 M. BRANCHESI<sup>57,58</sup>, J. E. BRAU<sup>59</sup>, T. BRIANT<sup>60</sup>, A. BRILLET<sup>53</sup>, M. BRINKMANN<sup>8</sup>, V. BRISSON<sup>23</sup>, P. BROCKILL<sup>16</sup>,  
 A. F. BROOKS<sup>1</sup>, D. A. BROWN<sup>35</sup>, D. D. BROWN<sup>45</sup>, N. M. BROWN<sup>10</sup>, C. C. BUCHANAN<sup>2</sup>, A. BUIKEMA<sup>10</sup>, T. BULIK<sup>61</sup>,  
 H. J. BULTEN<sup>62,9</sup>, A. BUONANNO<sup>29,63</sup>, D. BUSKULIC<sup>7</sup>, C. BUY<sup>30</sup>, R. L. BYER<sup>41</sup>, L. CADONATI<sup>64</sup>, G. CAGNOLI<sup>65,66</sup>,  
 C. CAHILLANE<sup>1</sup>, J. C. BUSTILLO<sup>67,64</sup>, T. CALLISTER<sup>1</sup>, E. CALLONI<sup>68,4</sup>, J. B. CAMP<sup>39</sup>, K. C. CANNON<sup>69</sup>, J. CAO<sup>70</sup>,  
 C. D. CAPANO<sup>8</sup>, E. CAPOCASA<sup>30</sup>, F. CARBOGNANI<sup>34</sup>, S. CARIDE<sup>71</sup>, J. C. DIAZ<sup>23</sup>, C. CASENTINI<sup>25,13</sup>, S. CAUDILL<sup>16</sup>,  
 M. CAVAGLIÀ<sup>21</sup>, F. CAVALIER<sup>23</sup>, R. CAVALIERI<sup>34</sup>, G. CELLA<sup>19</sup>, C. B. CEPEDA<sup>1</sup>, L. C. BAIARDI<sup>57,58</sup>, G. CERRETANI<sup>18,19</sup>,  
 E. CESARINI<sup>25,13</sup>, R. CHAKRABORTY<sup>1</sup>, T. CHALERMSONGSAK<sup>1</sup>, S. J. CHAMBERLIN<sup>72</sup>, M. CHAN<sup>36</sup>, S. CHAO<sup>73</sup>,  
 P. CHARLTON<sup>74</sup>, E. CHASSANDE-MOTTIN<sup>30</sup>, H. Y. CHEN<sup>75</sup>, Y. CHEN<sup>76</sup>, C. CHENG<sup>73</sup>, A. CHINCARINI<sup>47</sup>, A. CHIUMMO<sup>34</sup>,  
 H. S. CHO<sup>77</sup>, M. CHO<sup>63</sup>, J. H. CHOW<sup>20</sup>, N. CHRISTENSEN<sup>78</sup>, Q. CHU<sup>51</sup>, S. CHUA<sup>60</sup>, S. CHUNG<sup>51</sup>, G. CIANI<sup>5</sup>, F. CLARA<sup>37</sup>,  
 J. A. CLARK<sup>64</sup>, F. CLEVA<sup>53</sup>, E. COCCIA<sup>25,12,13</sup>, P.-F. COHADON<sup>60</sup>, A. COLLA<sup>79,28</sup>, C. G. COLLETTE<sup>80</sup>, L. COMINSKY<sup>81</sup>,  
 M. CONSTANCIO JR.<sup>11</sup>, A. CONTE<sup>79,28</sup>, L. CONTI<sup>43</sup>, D. COOK<sup>37</sup>, T. R. CORBITT<sup>2</sup>, N. CORNISH<sup>31</sup>, A. CORSI<sup>71</sup>,  
 S. CORTESE<sup>34</sup>, C. A. COSTA<sup>11</sup>, M. W. COUGHLIN<sup>78</sup>, S. B. COUGHLIN<sup>82</sup>, J.-P. COULON<sup>53</sup>, S. T. COUNTRYMAN<sup>40</sup>,  
 P. COUVARES<sup>1</sup>, E. E. COWAN<sup>64</sup>, D. M. COWARD<sup>51</sup>, M. J. COWART<sup>6</sup>, D. C. COYNE<sup>1</sup>, R. COYNE<sup>71</sup>, K. CRAIG<sup>36</sup>,  
 J. D. E. CREIGHTON<sup>16</sup>, J. CRIPE<sup>2</sup>, S. G. CROWDER<sup>83</sup>, A. CUMMING<sup>36</sup>, L. CUNNINGHAM<sup>36</sup>, E. CUOCO<sup>34</sup>,  
 T. DAL CANTON<sup>8</sup>, S. L. DANILISHIN<sup>36</sup>, S. D'ANTONIO<sup>13</sup>, K. DANZMANN<sup>17,8</sup>, N. S. DARMAN<sup>84</sup>, V. DATTILO<sup>34</sup>,  
 I. DAVE<sup>48</sup>, H. P. DAVELOZA<sup>85</sup>, M. DAVIER<sup>23</sup>, G. S. DAVIES<sup>36</sup>, E. J. DAW<sup>86</sup>, R. DAY<sup>34</sup>, D. DEBRA<sup>41</sup>, G. DEBRECZENI<sup>38</sup>,  
 J. DEGALLAIX<sup>66</sup>, M. DE LAURENTIS<sup>68,4</sup>, S. DELÉGLISE<sup>60</sup>, W. DEL POZZO<sup>45</sup>, T. DENKER<sup>8,17</sup>, T. DENT<sup>8</sup>, H. DERELI<sup>53</sup>,  
 V. DERGACHEV<sup>1</sup>, R. T. DEROSA<sup>6</sup>, R. DE ROSA<sup>68,4</sup>, R. DESALVO<sup>87</sup>, S. DHURANDHAR<sup>14</sup>, M. C. DÍAZ<sup>85</sup>, L. DI FIORE<sup>4</sup>,  
 M. DI GIOVANNI<sup>79,28</sup>, A. DI LIETO<sup>18,19</sup>, S. DI PACE<sup>79,28</sup>, I. DI PALMA<sup>29,8</sup>, A. DI VIRGILIO<sup>19</sup>, G. DOJCINOSKI<sup>88</sup>,  
 V. DOLIQUE<sup>66</sup>, F. DONOVAN<sup>10</sup>, K. L. DOOLEY<sup>21</sup>, S. DORAVARI<sup>6,8</sup>, R. DOUGLAS<sup>36</sup>, T. P. DOWNES<sup>16</sup>, M. DRAGO<sup>8,89,90</sup>,  
 R. W. P. DREVER<sup>1</sup>, J. C. DRIGGERS<sup>37</sup>, Z. DU<sup>70</sup>, M. DUCROT<sup>7</sup>, S. E. DWYER<sup>37</sup>, T. B. EDO<sup>86</sup>, M. C. EDWARDS<sup>78</sup>,  
 A. EFFLER<sup>6</sup>, H.-B. EGGENSTEIN<sup>8</sup>, P. EHRENS<sup>1</sup>, J. EICHHOLZ<sup>5</sup>, S. S. EIKENBERRY<sup>5</sup>, W. ENGELS<sup>76</sup>, R. C. ESSICK<sup>10</sup>,  
 T. ETZEL<sup>1</sup>, M. EVANS<sup>10</sup>, T. M. EVANS<sup>6</sup>, R. EVERETT<sup>72</sup>, M. FACTOUROVICH<sup>40</sup>, V. FAFONE<sup>25,13,12</sup>, H. FAIR<sup>35</sup>,  
 S. FAIRHURST<sup>91</sup>, X. FAN<sup>70</sup>, Q. FANG<sup>51</sup>, S. FARINON<sup>47</sup>, B. FARR<sup>75</sup>, W. M. FARR<sup>45</sup>, M. FAVATA<sup>88</sup>, M. FAYS<sup>91</sup>,  
 H. FEHRMANN<sup>8</sup>, M. M. FEJER<sup>41</sup>, I. FERRANTE<sup>18,19</sup>, E. C. FERREIRA<sup>11</sup>, F. FERRINI<sup>34</sup>, F. FIDECARO<sup>18,19</sup>, I. FIORI<sup>34</sup>,  
 D. FIORUCCI<sup>30</sup>, R. P. FISHER<sup>35</sup>, R. FLAMINIO<sup>66,92</sup>, M. FLETCHER<sup>36</sup>, J.-D. FOURNIER<sup>53</sup>, S. FRANCO<sup>23</sup>, S. FRASCA<sup>79,28</sup>,  
 F. FRASCONI<sup>19</sup>, Z. FREI<sup>54</sup>, A. FREISE<sup>45</sup>, R. FREY<sup>59</sup>, V. FREY<sup>23</sup>, T. T. FRICKE<sup>8</sup>, P. FRITSCHER<sup>10</sup>, V. V. FROLOV<sup>6</sup>,  
 P. FULDA<sup>5</sup>, M. FYFFE<sup>6</sup>, H. A. G. GABBARD<sup>21</sup>, J. R. GAIR<sup>93</sup>, L. GAMMAITONI<sup>32,33</sup>, S. G. GAONKAR<sup>14</sup>, F. GARUFI<sup>68,4</sup>,  
 A. GATTO<sup>30</sup>, G. GAUR<sup>94,95</sup>, N. GEHRELS<sup>39</sup>, G. GEMME<sup>47</sup>, B. GENDRE<sup>53</sup>, E. GENIN<sup>34</sup>, A. GENNAI<sup>19</sup>, J. GEORGE<sup>48</sup>,  
 L. GERGELY<sup>96</sup>, V. GERMAIN<sup>7</sup>, A. GHOSH<sup>15</sup>, S. GHOSH<sup>52,9</sup>, J. A. GIAIME<sup>2,6</sup>, K. D. GIARDINA<sup>6</sup>, A. GIAZOTTO<sup>19</sup>,  
 K. GILL<sup>97</sup>, A. GLAEFKE<sup>36</sup>, E. GOETZ<sup>98</sup>, R. GOETZ<sup>5</sup>, L. GONDAN<sup>54</sup>, G. GONZÁLEZ<sup>2</sup>, J. M. G. CASTRO<sup>18,19</sup>,  
 A. GOPAKUMAR<sup>99</sup>, N. A. GORDON<sup>36</sup>, M. L. GORODETSKY<sup>49</sup>, S. E. GOSSAN<sup>1</sup>, M. GOSSELIN<sup>34</sup>, R. GOUATY<sup>7</sup>,  
 C. GRAEF<sup>36</sup>, P. B. GRAFF<sup>63</sup>, M. GRANATA<sup>66</sup>, A. GRANT<sup>36</sup>, S. GRAS<sup>10</sup>, C. GRAY<sup>37</sup>, G. GRECO<sup>57,58</sup>, A. C. GREEN<sup>45</sup>,  
 P. GROOT<sup>52</sup>, H. GROTE<sup>8</sup>, S. GRUNEWALD<sup>29</sup>, G. M. GUIDI<sup>57,58</sup>, X. GUO<sup>70</sup>, A. GUPTA<sup>14</sup>, M. K. GUPTA<sup>95</sup>, K. E. GUSHWA<sup>1</sup>,  
 E. K. GUSTAFSON<sup>1</sup>, R. GUSTAFSON<sup>98</sup>, J. J. HACKER<sup>22</sup>, B. R. HALL<sup>56</sup>, E. D. HALL<sup>1</sup>, G. HAMMOND<sup>36</sup>, M. HANEY<sup>99</sup>,  
 M. M. HANKE<sup>8</sup>, J. HANKS<sup>37</sup>, C. HANNA<sup>72</sup>, M. D. HANNAM<sup>91</sup>, J. HANSON<sup>6</sup>, T. HARDWICK<sup>2</sup>, J. HARMS<sup>57,58</sup>,  
 G. M. HARRY<sup>100</sup>, I. W. HARRY<sup>29</sup>, M. J. HART<sup>36</sup>, M. T. HARTMAN<sup>5</sup>, C.-J. HASTER<sup>45</sup>, K. HAUGHIAN<sup>36</sup>, A. HEIDMANN<sup>60</sup>,  
 M. C. HEINTZE<sup>5,6</sup>, H. HEITMANN<sup>53</sup>, P. HELLO<sup>23</sup>, G. HEMMING<sup>34</sup>, M. HENDRY<sup>36</sup>, I. S. HENG<sup>36</sup>, J. HENNIG<sup>36</sup>,  
 A. W. HEPTONSTALL<sup>1</sup>, M. HEURS<sup>8,17</sup>, S. HILD<sup>36</sup>, D. HOAK<sup>101</sup>, K. A. HODGE<sup>1</sup>, D. HOFMAN<sup>66</sup>, S. E. HOLLITT<sup>102</sup>,  
 K. HOLT<sup>6</sup>, D. E. HOLZ<sup>75</sup>, P. HOPKINS<sup>91</sup>, D. J. HOSKEN<sup>102</sup>, J. HOUGH<sup>36</sup>, E. A. HOUSTON<sup>36</sup>, E. J. HOWELL<sup>51</sup>, Y. M. HU<sup>36</sup>,  
 S. HUANG<sup>73</sup>, E. A. HUERTA<sup>103,82</sup>, D. HUET<sup>23</sup>, B. HUGHEY<sup>97</sup>, S. HUSA<sup>67</sup>, S. H. HUTTNER<sup>36</sup>, T. HUYNH-DINH<sup>6</sup>,  
 A. IDRISY<sup>72</sup>, N. INDIK<sup>8</sup>, D. R. INGRAM<sup>37</sup>, R. INTA<sup>71</sup>, H. N. ISA<sup>36</sup>, J.-M. ISAC<sup>60</sup>, M. ISI<sup>1</sup>, G. ISLAS<sup>22</sup>, T. ISOGAI<sup>10</sup>,  
 B. R. IYER<sup>15</sup>, K. IZUMI<sup>37</sup>, T. JACQMIN<sup>60</sup>, H. JANG<sup>77</sup>, K. JANI<sup>64</sup>, P. JARANOWSKI<sup>104</sup>, S. JAWAHAR<sup>105</sup>,  
 F. JIMÉNEZ-FORTEZA<sup>67</sup>, W. W. JOHNSON<sup>2</sup>, D. I. JONES<sup>26</sup>, R. JONES<sup>36</sup>, R. J. G. JONKER<sup>9</sup>, L. JU<sup>51</sup>, H. K<sup>106</sup>,  
 C. V. KALAGHATGI<sup>24,91</sup>, V. KALOGERA<sup>82</sup>, S. KANDHASAMY<sup>21</sup>, G. KANG<sup>77</sup>, J. B. KANNER<sup>1</sup>, S. KARKI<sup>59</sup>,  
 M. KASPRZACK<sup>2,23,34</sup>, E. KATSAVOUNIDIS<sup>10</sup>, W. KATZMAN<sup>6</sup>, S. KAUFER<sup>17</sup>, T. KAUR<sup>51</sup>, K. KAWABE<sup>37</sup>, F. KAWAZOE<sup>8,17</sup>,  
 F. KÉFÉLIAN<sup>53</sup>, M. S. KEHL<sup>69</sup>, D. KEITEL<sup>8,67</sup>, D. B. KELLEY<sup>35</sup>, W. KELLS<sup>1</sup>, R. KENNEDY<sup>86</sup>, J. S. KEY<sup>85</sup>,  
 A. KHALAIDOVSKI<sup>8</sup>, F. Y. KHALILI<sup>49</sup>, I. KHAN<sup>12</sup>, S. KHAN<sup>91</sup>, Z. KHAN<sup>95</sup>, E. A. KHAZANOV<sup>107</sup>, N. KIJBUNCHOO<sup>37</sup>,  
 C. KIM<sup>77</sup>, J. KIM<sup>108</sup>, K. KIM<sup>109</sup>, N. KIM<sup>77</sup>, N. KIM<sup>41</sup>, Y.-M. KIM<sup>108</sup>, E. J. KING<sup>102</sup>, P. J. KING<sup>37</sup>, D. L. KINZEL<sup>6</sup>,  
 J. S. KISSEL<sup>37</sup>, L. KLEYBOLTE<sup>27</sup>, S. KLIMENKO<sup>5</sup>, S. M. KOEHLLENBECK<sup>8</sup>, K. KOKEYAMA<sup>2</sup>, S. KOLEY<sup>9</sup>,  
 V. KONDRASHOV<sup>1</sup>, A. KONTOS<sup>10</sup>, M. KOROBKO<sup>27</sup>, W. Z. KORTH<sup>1</sup>, I. KOWALSKA<sup>61</sup>, D. B. KOZAK<sup>1</sup>, V. KRINGEL<sup>8</sup>,  
 A. KRÓLAK<sup>110,111</sup>, C. KRUEGER<sup>17</sup>, G. KUEHN<sup>8</sup>, P. KUMAR<sup>69</sup>, L. KUO<sup>73</sup>, A. KUTYNIA<sup>110</sup>, B. D. LACKEY<sup>35</sup>,  
 M. LANDRY<sup>37</sup>, J. LANGE<sup>112</sup>, B. LANTZ<sup>41</sup>, P. D. LASKY<sup>113</sup>, A. LAZZARINI<sup>1</sup>, C. LAZZARO<sup>64,43</sup>, P. LEACI<sup>29,79,28</sup>,

S. LEAVEY<sup>36</sup>, E. O. LEBIGOT<sup>30,70</sup>, C. H. LEE<sup>108</sup>, H. K. LEE<sup>109</sup>, H. M. LEE<sup>114</sup>, K. LEE<sup>36</sup>, A. LENON<sup>35</sup>, M. LEONARDI<sup>89,90</sup>,  
 J. R. LEONG<sup>8</sup>, N. LEROY<sup>23</sup>, N. LETENDRE<sup>7</sup>, Y. LEVIN<sup>113</sup>, B. M. LEVINE<sup>37</sup>, T. G. F. LI<sup>1</sup>, A. LIBSON<sup>10</sup>,  
 T. B. LITTENBERG<sup>115</sup>, N. A. LOCKERBIE<sup>105</sup>, J. LOGUE<sup>36</sup>, A. L. LOMBARDI<sup>101</sup>, J. E. LORD<sup>35</sup>, M. LORENZINI<sup>12,13</sup>,  
 V. LORLETTE<sup>116</sup>, M. LORMAND<sup>6</sup>, G. LOSURDO<sup>58</sup>, J. D. LOUGH<sup>8,17</sup>, H. LÜCK<sup>17,8</sup>, A. P. LUNDGREN<sup>8</sup>, J. LUO<sup>78</sup>,  
 R. LYNCH<sup>10</sup>, Y. MA<sup>51</sup>, T. MACDONALD<sup>41</sup>, B. MACHENSCHALK<sup>8</sup>, M. MACINNIS<sup>10</sup>, D. M. MACLEOD<sup>2</sup>,  
 F. MAGAÑA-SANDOVAL<sup>35</sup>, R. M. MAGEE<sup>56</sup>, M. MAGESWARAN<sup>1</sup>, E. MAJORANA<sup>28</sup>, I. MAKSIMOVIC<sup>116</sup>,  
 V. MALVEZZI<sup>25,13</sup>, N. MAN<sup>53</sup>, I. MANDEL<sup>45</sup>, V. MANDIC<sup>83</sup>, V. MANGANO<sup>36</sup>, G. L. MANSSELL<sup>20</sup>, M. MANSKE<sup>16</sup>,  
 M. MANTOVANI<sup>34</sup>, F. MARCHESONI<sup>117,33</sup>, F. MARION<sup>7</sup>, S. MÁRKA<sup>40</sup>, Z. MÁRKA<sup>40</sup>, A. S. MARKOSYAN<sup>41</sup>, E. MAROS<sup>1</sup>,  
 F. MARTELLI<sup>57,58</sup>, L. MARTELLINI<sup>53</sup>, I. W. MARTIN<sup>36</sup>, R. M. MARTIN<sup>5</sup>, D. V. MARTYNOV<sup>1</sup>, J. N. MARX<sup>1</sup>, K. MASON<sup>10</sup>,  
 A. MASSEROT<sup>7</sup>, T. J. MASSINGER<sup>35</sup>, M. MASSO-REID<sup>36</sup>, F. MATICHARD<sup>10</sup>, L. MATONE<sup>40</sup>, N. MAVALVALA<sup>10</sup>,  
 N. MAZUMDER<sup>56</sup>, G. MAZZOLO<sup>8</sup>, R. MCCARTHY<sup>37</sup>, D. E. MCCLELLAND<sup>20</sup>, S. MCCORMICK<sup>6</sup>, S. C. MCGUIRE<sup>118</sup>,  
 G. MCINTYRE<sup>1</sup>, J. MCIVER<sup>1</sup>, D. J. MCMANUS<sup>20</sup>, S. T. MCWILLIAMS<sup>103</sup>, D. MEACHER<sup>72</sup>, G. D. MEADORS<sup>29,8</sup>,  
 J. MEIDAM<sup>9</sup>, A. MELATOS<sup>84</sup>, G. MENDELL<sup>37</sup>, D. MENDOZA-GANDARA<sup>8</sup>, R. A. MERCER<sup>16</sup>, E. MERILH<sup>37</sup>,  
 M. MERZOUGUI<sup>53</sup>, S. MESHKOV<sup>1</sup>, C. MESSENGER<sup>36</sup>, C. MESSICK<sup>72</sup>, P. M. MEYERS<sup>83</sup>, F. MEZZANI<sup>28,79</sup>, H. MIAO<sup>45</sup>,  
 C. MICHEL<sup>66</sup>, H. MIDDLETON<sup>45</sup>, E. E. MIKHAILOV<sup>119</sup>, L. MILANO<sup>68,4</sup>, J. MILLER<sup>10</sup>, M. MILLHOUSE<sup>31</sup>, Y. MINENKOV<sup>13</sup>,  
 J. MING<sup>29,8</sup>, S. MIRSHEKARI<sup>120</sup>, C. MISHRA<sup>15</sup>, S. MITRA<sup>14</sup>, V. P. MITROFANOV<sup>49</sup>, G. MITSELMAKHER<sup>5</sup>,  
 R. MITTLEMAN<sup>10</sup>, A. MOGGI<sup>19</sup>, M. MOHAN<sup>34</sup>, S. R. P. MOHAPATRA<sup>10</sup>, M. MONTANI<sup>57,58</sup>, B. C. MOORE<sup>88</sup>,  
 C. J. MOORE<sup>121</sup>, D. MORARU<sup>37</sup>, G. MORENO<sup>37</sup>, S. R. MORRIS<sup>85</sup>, K. MOSSAVI<sup>8</sup>, B. MOURS<sup>7</sup>, C. M. MOW-LOWRY<sup>45</sup>,  
 C. L. MUELLER<sup>5</sup>, G. MUELLER<sup>5</sup>, A. W. MUIR<sup>91</sup>, A. MUKHERJEE<sup>15</sup>, D. MUKHERJEE<sup>16</sup>, S. MUKHERJEE<sup>85</sup>, N. MUKUND<sup>14</sup>,  
 A. MULLAVEY<sup>6</sup>, J. MUNCH<sup>102</sup>, D. J. MURPHY<sup>40</sup>, P. G. MURRAY<sup>36</sup>, A. MYTIDIS<sup>5</sup>, I. NARDECCHIA<sup>25,13</sup>,  
 L. NATICCHIONI<sup>79,28</sup>, R. K. NAYAK<sup>122</sup>, V. NECULA<sup>5</sup>, K. NEDKOVA<sup>101</sup>, G. NELEMANS<sup>52,9</sup>, M. NERI<sup>46,47</sup>, A. NEUNZERT<sup>98</sup>,  
 G. NEWTON<sup>36</sup>, T. T. NGUYEN<sup>20</sup>, A. B. NIELSEN<sup>8</sup>, S. NISSANKE<sup>52,9</sup>, A. NITZ<sup>8</sup>, F. NOCERA<sup>34</sup>, D. NOLTING<sup>6</sup>,  
 M. E. N. NORMANDIN<sup>85</sup>, L. K. NUTTALL<sup>35</sup>, J. OBERLING<sup>37</sup>, E. OCHSNER<sup>16</sup>, J. O'DELL<sup>123</sup>, E. OELKER<sup>10</sup>, G. H. OGIN<sup>124</sup>,  
 J. J. OH<sup>125</sup>, S. H. OH<sup>125</sup>, F. OHME<sup>91</sup>, M. OLIVER<sup>67</sup>, P. OPPERMANN<sup>8</sup>, R. J. ORAM<sup>6</sup>, B. O'REILLY<sup>6</sup>,  
 R. O'SHAUGHNESSY<sup>112</sup>, D. J. OTTAWAY<sup>102</sup>, R. S. OTTENS<sup>5</sup>, H. OVERMIER<sup>6</sup>, B. J. OWEN<sup>71</sup>, A. PAI<sup>106</sup>, S. A. PAI<sup>48</sup>,  
 J. R. PALAMOS<sup>59</sup>, O. PALASHOV<sup>107</sup>, N. PALLIYAGURU<sup>71</sup>, C. PALOMBA<sup>28</sup>, A. PAL-SINGH<sup>27</sup>, H. PAN<sup>73</sup>, C. PANKOW<sup>82</sup>,  
 F. PANNARALE<sup>91</sup>, B. C. PANT<sup>48</sup>, F. PAOLETTI<sup>34,19</sup>, A. PAOLI<sup>34</sup>, M. A. PAPA<sup>29,16,8</sup>, H. R. PARIS<sup>41</sup>, W. PARKER<sup>6</sup>,  
 D. PASCUCCI<sup>36</sup>, A. PASQUALETTI<sup>34</sup>, R. PASSAQUIETI<sup>18,19</sup>, D. PASSUELLO<sup>19</sup>, B. PATRICELLI<sup>18,19</sup>, Z. PATRICK<sup>41</sup>,  
 B. L. PEARLSTONE<sup>36</sup>, M. PEDRAZA<sup>1</sup>, R. PEDURAND<sup>66</sup>, L. PEKOWSKY<sup>35</sup>, A. PELE<sup>6</sup>, S. PENN<sup>126</sup>, A. PERRECA<sup>1</sup>,  
 M. PHELPS<sup>36</sup>, O. PICCINI<sup>79,28</sup>, M. PICHOT<sup>53</sup>, F. PIERGIOVANNI<sup>57,58</sup>, V. PIERRO<sup>87</sup>, G. PILLANT<sup>34</sup>, L. PINARD<sup>66</sup>,  
 I. M. PINTO<sup>87</sup>, M. PITKIN<sup>36</sup>, R. POGGIANI<sup>18,19</sup>, P. POPOLIZIO<sup>34</sup>, A. POST<sup>8</sup>, J. POWELL<sup>36</sup>, J. PRASAD<sup>14</sup>, V. PREDOI<sup>91</sup>,  
 S. S. PREMACHANDRA<sup>113</sup>, T. PRESTEGARD<sup>83</sup>, L. R. PRICE<sup>1</sup>, M. PRIJATELJ<sup>34</sup>, M. PRINCIPE<sup>87</sup>, S. PRIVITERA<sup>29</sup>,  
 G. A. PRODI<sup>89,90</sup>, L. PROKHOROV<sup>49</sup>, O. PUNCKEN<sup>8</sup>, M. PUNTURO<sup>33</sup>, P. PUPPO<sup>28</sup>, M. PÜRRE<sup>29</sup>, H. QI<sup>16</sup>, J. QIN<sup>51</sup>,  
 V. QUETSCHKE<sup>85</sup>, E. A. QUINTERO<sup>1</sup>, R. QUITZOW-JAMES<sup>59</sup>, F. J. RAAB<sup>37</sup>, D. S. RABELING<sup>20</sup>, H. RADKINS<sup>37</sup>,  
 P. RAFFAI<sup>54</sup>, S. RAJA<sup>48</sup>, M. RAKHMANOV<sup>85</sup>, P. RAPAGNANI<sup>79,28</sup>, V. RAYMOND<sup>29</sup>, M. RAZZANO<sup>18,19</sup>, V. RE<sup>25</sup>, J. READ<sup>22</sup>,  
 C. M. REED<sup>37</sup>, T. REGIMBAU<sup>53</sup>, L. REI<sup>47</sup>, S. REID<sup>50</sup>, D. H. REITZE<sup>1,5</sup>, H. REW<sup>119</sup>, S. D. REYES<sup>35</sup>, F. RICCI<sup>79,28</sup>,  
 K. RILES<sup>98</sup>, N. A. ROBERTSON<sup>1,36</sup>, R. ROBBIE<sup>36</sup>, F. ROBINET<sup>23</sup>, A. ROCCHI<sup>13</sup>, L. ROLLAND<sup>7</sup>, J. G. ROLLINS<sup>1</sup>,  
 V. J. ROMA<sup>59</sup>, R. ROMANO<sup>3,4</sup>, G. ROMANOV<sup>119</sup>, J. H. ROMIE<sup>6</sup>, D. ROSIŃSKA<sup>127,44</sup>, S. ROWAN<sup>36</sup>, A. RÜDIGER<sup>8</sup>,  
 P. RUGGI<sup>34</sup>, K. RYAN<sup>37</sup>, S. SACHDEV<sup>1</sup>, T. SADECKI<sup>37</sup>, L. SADEGHIAN<sup>16</sup>, L. SALCONI<sup>34</sup>, M. SALEEM<sup>106</sup>, F. SALEMI<sup>8</sup>,  
 A. SAMAJDAR<sup>122</sup>, L. SAMMUT<sup>84,113</sup>, E. J. SANCHEZ<sup>1</sup>, V. SANDBERG<sup>37</sup>, B. SANDEEN<sup>82</sup>, J. R. SANDERS<sup>98,35</sup>,  
 B. SASSOLAS<sup>66</sup>, B. S. SATHYAPRAKASH<sup>91</sup>, P. R. SAULSON<sup>35</sup>, O. SAUTER<sup>98</sup>, R. L. SAVAGE<sup>37</sup>, A. SAWADSKY<sup>17</sup>,  
 P. SCHALE<sup>59</sup>, R. SCHILLING<sup>†8</sup>, J. SCHMIDT<sup>8</sup>, P. SCHMIDT<sup>1,76</sup>, R. SCHNABEL<sup>27</sup>, R. M. S. SCHOFIELD<sup>59</sup>,  
 A. SCHÖNBECK<sup>27</sup>, E. SCHREIBER<sup>8</sup>, D. SCHUETTE<sup>8,17</sup>, B. F. SCHUTZ<sup>91,29</sup>, J. SCOTT<sup>36</sup>, S. M. SCOTT<sup>20</sup>, D. SELLERS<sup>6</sup>,  
 D. SENTENAC<sup>34</sup>, V. SEQUINO<sup>25,13</sup>, A. SERGEEV<sup>107</sup>, G. SERNA<sup>22</sup>, Y. SETYAWATI<sup>52,9</sup>, A. SEVIGNY<sup>37</sup>, D. A. SHADDOCK<sup>20</sup>,  
 S. SHAH<sup>52,9</sup>, M. S. SHAHRIAR<sup>82</sup>, M. SHALTEV<sup>8</sup>, Z. SHAO<sup>1</sup>, B. SHAPIRO<sup>41</sup>, P. SHAWHAN<sup>63</sup>, A. SHEPERD<sup>16</sup>,  
 D. H. SHOEMAKER<sup>10</sup>, D. M. SHOEMAKER<sup>64</sup>, K. SIELLEZ<sup>53,64</sup>, X. SIEMENS<sup>16</sup>, D. SIGG<sup>37</sup>, A. D. SILVA<sup>11</sup>, D. SIMAKOV<sup>8</sup>,  
 A. SINGER<sup>1</sup>, A. SINGH<sup>29,8</sup>, R. SINGH<sup>2</sup>, A. SINGHAL<sup>12</sup>, A. M. SINTES<sup>67</sup>, B. J. J. SLAGMOLEN<sup>20</sup>, J. R. SMITH<sup>22</sup>,  
 N. D. SMITH<sup>1</sup>, R. J. E. SMITH<sup>1</sup>, E. J. SON<sup>125</sup>, B. SORAZU<sup>36</sup>, F. SORRENTINO<sup>47</sup>, T. SOURADEEP<sup>14</sup>, A. K. SRIVASTAVA<sup>95</sup>,  
 A. STALEY<sup>40</sup>, M. STEINKE<sup>8</sup>, J. STEINLECHNER<sup>36</sup>, S. STEINLECHNER<sup>36</sup>, D. STEINMEYER<sup>8,17</sup>, B. C. STEPHENS<sup>16</sup>,  
 R. STONE<sup>85</sup>, K. A. STRAIN<sup>36</sup>, N. STRANIERO<sup>66</sup>, G. STRATTA<sup>57,58</sup>, N. A. STRAUSS<sup>78</sup>, S. STRIGIN<sup>49</sup>, R. STURANI<sup>120</sup>,  
 A. L. STUVER<sup>6</sup>, T. Z. SUMMERSCALES<sup>128</sup>, L. SUN<sup>84</sup>, P. J. SUTTON<sup>91</sup>, B. L. SWINKELS<sup>34</sup>, M. J. SZCZEPAŃCZYK<sup>97</sup>,  
 M. TACCA<sup>30</sup>, D. TALUKDER<sup>59</sup>, D. B. TANNER<sup>5</sup>, M. TÁPAI<sup>96</sup>, S. P. TARABRIN<sup>8</sup>, A. TARACCHINI<sup>29</sup>, R. TAYLOR<sup>1</sup>,  
 T. THEEG<sup>8</sup>, M. P. THIRUGNANASAMBANDAM<sup>1</sup>, E. G. THOMAS<sup>45</sup>, M. THOMAS<sup>6</sup>, P. THOMAS<sup>37</sup>, K. A. THORNE<sup>6</sup>,  
 K. S. THORNE<sup>76</sup>, E. THRANE<sup>113</sup>, S. TIWARI<sup>12</sup>, V. TIWARI<sup>91</sup>, K. V. TOKMAKOV<sup>105</sup>, C. TOMLINSON<sup>86</sup>, M. TONELLI<sup>18,19</sup>,

C. V. TORRES<sup>‡85</sup>, C. I. TORRIE<sup>1</sup>, D. TÖYRÄ<sup>45</sup>, F. TRAVASSO<sup>32,33</sup>, G. TRAYLOR<sup>6</sup>, D. TRIFIRÒ<sup>21</sup>, M. C. TRINGALI<sup>89,90</sup>,  
 L. TROZZO<sup>129,19</sup>, M. TSE<sup>10</sup>, M. TURCONI<sup>53</sup>, D. TUYENBAYEV<sup>85</sup>, D. UGOLINI<sup>130</sup>, C. S. UNNIKRIISHNAN<sup>99</sup>,  
 A. L. URBAN<sup>16</sup>, S. A. USMAN<sup>35</sup>, H. VAHLBRUCH<sup>17</sup>, G. VAJENTE<sup>1</sup>, G. VALDES<sup>85</sup>, N. VAN BAKEL<sup>9</sup>, M. VAN BEUZEKOM<sup>9</sup>,  
 J. F. J. VAN DEN BRAND<sup>62,9</sup>, C. VAN DEN BROECK<sup>9</sup>, D. C. VANDER-HYDE<sup>35,22</sup>, L. VAN DER SCHAAP<sup>9</sup>,  
 J. V. VAN HEIJNINGEN<sup>9</sup>, A. A. VAN VEGGEL<sup>36</sup>, M. VARDARO<sup>42,43</sup>, S. VASS<sup>1</sup>, M. VASÚTH<sup>38</sup>, R. VAULIN<sup>10</sup>, A. VECCHIO<sup>45</sup>,  
 G. VEDOVATO<sup>43</sup>, J. VEITCH<sup>45</sup>, P. J. VEITCH<sup>102</sup>, K. VENKATESWARA<sup>131</sup>, D. VERKINDT<sup>7</sup>, F. VETRANO<sup>57,58</sup>,  
 A. VICERÉ<sup>57,58</sup>, S. VINCIGUERRA<sup>45</sup>, D. J. VINE<sup>50</sup>, J.-Y. VINET<sup>53</sup>, S. VITALE<sup>10</sup>, T. VO<sup>35</sup>, H. VOCCA<sup>32,33</sup>, C. VORVICK<sup>37</sup>,  
 D. VOSS<sup>5</sup>, W. D. VOUSDEN<sup>45</sup>, S. P. VYATCHANIN<sup>49</sup>, A. R. WADE<sup>20</sup>, L. E. WADE<sup>132</sup>, M. WADE<sup>132</sup>, M. WALKER<sup>2</sup>,  
 L. WALLACE<sup>1</sup>, S. WALSH<sup>16,8,29</sup>, G. WANG<sup>12</sup>, H. WANG<sup>45</sup>, M. WANG<sup>45</sup>, X. WANG<sup>70</sup>, Y. WANG<sup>51</sup>, R. L. WARD<sup>20</sup>,  
 J. WARNER<sup>37</sup>, M. WAS<sup>7</sup>, B. WEAVER<sup>37</sup>, L.-W. WEI<sup>53</sup>, M. WEINERT<sup>8</sup>, A. J. WEINSTEIN<sup>1</sup>, R. WEISS<sup>10</sup>, T. WELBORN<sup>6</sup>,  
 L. WEN<sup>51</sup>, P. WESSELS<sup>8</sup>, T. WESTPHAL<sup>8</sup>, K. WETTE<sup>8</sup>, J. T. WHELAN<sup>112,8</sup>, D. J. WHITE<sup>86</sup>, B. F. WHITING<sup>5</sup>,  
 R. D. WILLIAMS<sup>1</sup>, A. R. WILLIAMSON<sup>91</sup>, J. L. WILLIS<sup>133</sup>, B. WILLKE<sup>17,8</sup>, M. H. WIMMER<sup>8,17</sup>, W. WINKLER<sup>8</sup>,  
 C. C. WIPF<sup>1</sup>, H. WITTEL<sup>8,17</sup>, G. WOAN<sup>36</sup>, J. WORDEN<sup>37</sup>, J. L. WRIGHT<sup>36</sup>, G. WU<sup>6</sup>, J. YABLON<sup>82</sup>, W. YAM<sup>10</sup>,  
 H. YAMAMOTO<sup>1</sup>, C. C. YANCEY<sup>63</sup>, M. J. YAP<sup>20</sup>, H. YU<sup>10</sup>, M. YVERT<sup>7</sup>, A. ZADROŹNY<sup>110</sup>, L. ZANGRANDO<sup>43</sup>,  
 M. ZANOLIN<sup>97</sup>, J.-P. ZENDRI<sup>43</sup>, M. ZEVIN<sup>82</sup>, F. ZHANG<sup>10</sup>, L. ZHANG<sup>1</sup>, M. ZHANG<sup>119</sup>, Y. ZHANG<sup>112</sup>, C. ZHAO<sup>51</sup>,  
 M. ZHOU<sup>82</sup>, Z. ZHOU<sup>82</sup>, X. J. ZHU<sup>51</sup>, M. E. ZUCKER<sup>1,10</sup>, S. E. ZURAW<sup>101</sup>, J. ZWEIZIG<sup>1</sup>

The LIGO Scientific Collaboration and the Virgo Collaboration

J. ALLISON<sup>134,135</sup>, K. BANNISTER<sup>134,135</sup>, M. E. BELL<sup>134,135</sup>, S. CHATTERJEE<sup>136</sup>, A. P. CHIPPENDALE<sup>134</sup>,  
 P. G. EDWARDS<sup>134</sup>, L. HARVEY-SMITH<sup>134</sup>, IAN HEYWOOD<sup>134,137</sup>, A. HOTAN<sup>138</sup>, B. INDERMUEHLE<sup>134</sup>, J. MARVIL<sup>134</sup>,  
 D. MCCONNELL<sup>134</sup>, T. MURPHY<sup>139,135</sup>, A. POPPING<sup>140,135</sup>, J. REYNOLDS<sup>134</sup>, R. J. SAULT<sup>84,134</sup>, M. A. VORONKOV<sup>134</sup>,  
 M. T. WHITING<sup>134</sup>

The Australian Square Kilometer Array Pathfinder (ASKAP) Collaboration

A. J. CASTRO-TIRADO<sup>141,142</sup>, R. CUNNIFFE<sup>141</sup>, M. JELÍNEK<sup>143</sup>, J. C. TELLO<sup>141</sup>, S. R. OATES<sup>141</sup>, B.-B. ZHANG<sup>141</sup>,  
 Y.-D. HU<sup>141</sup>, P. KUBÁNEK<sup>144</sup>, S. GUZİY<sup>145</sup>, A. CASTELLÓN<sup>146</sup>, A. GARCÍA-CEREZO<sup>142</sup>, V. F. MUÑOZ<sup>142</sup>,  
 C. PÉREZ DEL PULGAR<sup>142</sup>, S. CASTILLO-CARRIÓN<sup>147</sup>, J. M. CASTRO CERÓN<sup>148</sup>, R. HUDEC<sup>143,149</sup>,  
 M. D. CABALLERO-GARCÍA<sup>150</sup>, P. PÁTA<sup>149</sup>, S. VITEK<sup>149</sup>, J. A. ADAME<sup>151</sup>, S. KONIG<sup>151</sup>, F. RENDÓN<sup>141,151</sup>,  
 T. DE J. MATEO SANGUINO<sup>152</sup>, R. FERNÁNDEZ-MUÑOZ<sup>153</sup>, P. C. YOCK<sup>154</sup>, N. RATTENBURY<sup>154</sup>, W. H. ALLEN<sup>155</sup>,  
 R. QUEREL<sup>156</sup>, S. JEONG<sup>141,157</sup>, I. H. PARK<sup>157</sup>, J. BAI<sup>158</sup>, CH. CUI<sup>159</sup>, Y. FAN<sup>158</sup>, CH. WANG<sup>158</sup>, D. HIRIART<sup>160</sup>,  
 W. H. LEE<sup>161</sup>, A. CLARET<sup>141</sup>, R. SÁNCHEZ-RAMÍREZ<sup>141</sup>, S. B. PANDEY<sup>162</sup>, T. MEDIAVILLA<sup>163</sup>, L. SABAU-GRAZIATI<sup>164</sup>

The BOOTES Collaboration

T. M. C. ABBOTT<sup>165</sup>, F. B. ABDALLA<sup>166,137</sup>, S. ALLAM<sup>167</sup>, J. ANNIS<sup>167</sup>, R. ARMSTRONG<sup>168</sup>, A. BENOIT-LÉVY<sup>169,166,170</sup>,  
 E. BERGER<sup>171</sup>, R. A. BERNSTEIN<sup>172</sup>, E. BERTIN<sup>169,170</sup>, D. BROUT<sup>173</sup>, E. BUCKLEY-GEER<sup>167</sup>, D. L. BURKE<sup>174,175</sup>,  
 D. CAPOZZI<sup>176</sup>, J. CARRETERO<sup>177,178</sup>, F. J. CASTANDER<sup>177</sup>, R. CHORNOCK<sup>179</sup>, P. S. COWPERTHWAITTE<sup>171</sup>, M. CROCCE<sup>177</sup>,  
 C. E. CUNHA<sup>174</sup>, C. B. D'ANDREA<sup>176,26</sup>, L. N. DA COSTA<sup>180,181</sup>, S. DESAI<sup>182,183</sup>, H. T. DIEHL<sup>167</sup>, J. P. DIETRICH<sup>182,183</sup>,  
 Z. DOCTOR<sup>184</sup>, A. DRLICA-WAGNER<sup>167</sup>, M. R. DROUT<sup>171</sup>, T. F. EIFLER<sup>173,185</sup>, J. ESTRADA<sup>167</sup>, A. E. EVRARD<sup>98</sup>,  
 E. FERNANDEZ<sup>178</sup>, D. A. FINLEY<sup>167</sup>, B. FLAUGHER<sup>167</sup>, R. J. FOLEY<sup>186,187</sup>, W.-F. FONG<sup>188</sup>, P. FOSALBA<sup>177</sup>, D. B. FOX<sup>189</sup>,  
 J. FRIEMAN<sup>167,184</sup>, C. L. FRYER<sup>190</sup>, E. GAZTANAGA<sup>177</sup>, D. W. GERDES<sup>191</sup>, D. A. GOLDSTEIN<sup>192,193</sup>, D. GRUEN<sup>174,175</sup>,  
 R. A. GRUENDL<sup>186,194</sup>, G. GUTIERREZ<sup>167</sup>, K. HERNER<sup>167</sup>, K. HONSCHEID<sup>195,196</sup>, D. J. JAMES<sup>165</sup>, M. D. JOHNSON<sup>194</sup>,  
 M. W. G. JOHNSON<sup>194</sup>, I. KARLINER<sup>187</sup>, D. KASEN<sup>197,193</sup>, S. KENT<sup>167</sup>, R. KESSLER<sup>184</sup>, A. G. KIM<sup>193</sup>, M. C. KIND<sup>186,194</sup>,  
 K. KUEHN<sup>198</sup>, N. KUROPATKIN<sup>167</sup>, O. LAHAV<sup>166</sup>, T. S. LI<sup>199</sup>, M. LIMA<sup>200,180</sup>, H. LIN<sup>167</sup>, M. A. G. MAIA<sup>180,181</sup>,  
 R. MARGUTTI<sup>201</sup>, J. MARRINER<sup>167</sup>, P. MARTINI<sup>195,202</sup>, T. MATHESON<sup>203</sup>, P. MELCHIOR<sup>168</sup>, B. D. METZGER<sup>204</sup>,  
 C. J. MILLER<sup>205,191</sup>, R. MIQUEL<sup>206,178</sup>, E. NEILSEN<sup>167</sup>, R. C. NICHOL<sup>176</sup>, B. NORD<sup>167</sup>, P. NUGENT<sup>193</sup>, R. OGANDO<sup>180,181</sup>,  
 D. PETRAVICK<sup>194</sup>, A. A. PLAZAS<sup>185</sup>, E. QUATAERT<sup>207</sup>, N. ROE<sup>193</sup>, A. K. ROMER<sup>208</sup>, A. ROODMAN<sup>174,175</sup>,  
 A. C. ROSELL<sup>180,181</sup>, E. S. RYKOFF<sup>174,175</sup>, M. SAKO<sup>173</sup>, E. SANCHEZ<sup>209</sup>, V. SCARPINE<sup>167</sup>, R. SCHINDLER<sup>175</sup>,  
 M. SCHUBNELL<sup>191</sup>, D. SCOLNIC<sup>184</sup>, I. SEVILLA-NOARBE<sup>209,186</sup>, E. SHELDON<sup>210</sup>, N. SMITH<sup>188</sup>, R. C. SMITH<sup>165</sup>,  
 M. SOARES-SANTOS<sup>167</sup>, F. SOBREIRA<sup>180</sup>, A. STEBBINS<sup>167</sup>, E. SUCHYTA<sup>173</sup>, M. E. C. SWANSON<sup>194</sup>, G. TARLE<sup>191</sup>,  
 J. THALER<sup>187</sup>, D. THOMAS<sup>176</sup>, R. C. THOMAS<sup>193</sup>, D. L. TUCKER<sup>167</sup>, V. VIKRAM<sup>211</sup>, A. R. WALKER<sup>165</sup>,  
 R. H. WECHSLER<sup>41,174,175</sup>, W. WESTER<sup>167</sup>, B. YANNY<sup>167</sup>, Y. ZHANG<sup>98</sup>, J. ZUNTZ<sup>212</sup>

The Dark Energy Survey and the Dark Energy Camera GW-EM Collaborations

V. CONNAUGHTON<sup>213</sup>, E. BURNS<sup>214</sup>, A. GOLDSTEIN<sup>215,216</sup>, M. S. BRIGGS<sup>217</sup>, B.-B. ZHANG<sup>218,219</sup>, C. M. HUI<sup>216</sup>,

P. JENKE<sup>218</sup>, C. A. WILSON-HODGE<sup>216</sup>, P. N. BHAT<sup>218</sup>, E. BISSALDI<sup>220</sup>, W. CLEVELAND<sup>213</sup>, G. FITZPATRICK<sup>218</sup>,  
M. M. GILES<sup>221</sup>, M. H. GIBBY<sup>221</sup>, J. GREINER<sup>222</sup>, A. VON KIENLIN<sup>222</sup>, R. M. KIPPEN<sup>223</sup>, S. MCBREEN<sup>224</sup>,  
B. MAILYAN<sup>218</sup>, C. A. MEEGAN<sup>218</sup>, W. S. PACIASAS<sup>213</sup>, R. D. PREECE<sup>217</sup>, O. ROBERTS<sup>224</sup>, L. SPARKE<sup>225</sup>,  
M. STANBRO<sup>214</sup>, K. TOELGE<sup>222</sup>, P. VERES<sup>218</sup>, H.-F. YU<sup>222,226</sup>, L. BLACKBURN<sup>171</sup>

The *Fermi* GBM Collaboration

M. ACKERMANN<sup>227</sup>, M. AJELLO<sup>228</sup>, A. ALBERT<sup>229</sup>, B. ANDERSON<sup>230,231</sup>, W. B. ATWOOD<sup>232</sup>, M. AXELSSON<sup>233,234</sup>,  
L. BALDINI<sup>235,229</sup>, G. BARBIELLINI<sup>236,237</sup>, D. BASTIERI<sup>238,239</sup>, R. BELLAZZINI<sup>240</sup>, E. BISSALDI<sup>241</sup>, R. D. BLANDFORD<sup>229</sup>,  
E. D. BLOOM<sup>229</sup>, R. BONINO<sup>242,243</sup>, E. BOTTACINI<sup>229</sup>, T. J. BRANDT<sup>244</sup>, P. BRUEL<sup>245</sup>, S. BUSON<sup>244,246,247</sup>,  
G. A. CALIANDRO<sup>229,248</sup>, R. A. CAMERON<sup>229</sup>, M. CARAGIULO<sup>249,241</sup>, P. A. CARAVEO<sup>250</sup>, E. CAVAZZUTI<sup>251</sup>,  
E. CHARLES<sup>229</sup>, A. CHEKHTMAN<sup>252</sup>, J. CHIANG<sup>229</sup>, G. CHIARO<sup>239</sup>, S. CIPRINI<sup>251,253</sup>, J. COHEN-TANUGI<sup>254</sup>,  
L. R. COMINSKY<sup>255</sup>, F. COSTANZA<sup>241</sup>, A. CUOCO<sup>242,243</sup>, F. D'AMMANDO<sup>256,257</sup>, F. DE PALMA<sup>241,258</sup>, R. DESIANTE<sup>259,242</sup>,  
S. W. DIGEL<sup>229</sup>, N. DI LALLA<sup>240</sup>, M. DI MAURO<sup>229</sup>, L. DI VENERE<sup>249,241</sup>, A. DOMÍNGUEZ<sup>228</sup>, P. S. DRELL<sup>229</sup>,  
R. DUBOIS<sup>229</sup>, C. FAVUZZI<sup>249,241</sup>, E. C. FERRARA<sup>244</sup>, A. FRANCKOWIAK<sup>229</sup>, Y. FUKAZAWA<sup>260</sup>, S. FUNK<sup>261</sup>,  
P. FUSCO<sup>249,241</sup>, F. GARGANO<sup>241</sup>, D. GASPARRINI<sup>251,253</sup>, N. GIGLIETTO<sup>249,241</sup>, P. GIOMMI<sup>251</sup>, F. GIORDANO<sup>249,241</sup>,  
M. GIROLETTI<sup>256</sup>, T. GLANZMAN<sup>229</sup>, G. GODFREY<sup>229</sup>, G. A. GOMEZ-VARGAS<sup>262,263</sup>, D. GREEN<sup>264,244</sup>, I. A. GRENIER<sup>265</sup>,  
J. E. GROVE<sup>266</sup>, S. GUIRIEC<sup>244,267</sup>, D. HADASCH<sup>268</sup>, A. K. HARDING<sup>244</sup>, E. HAYS<sup>244</sup>, J. W. HEWITT<sup>269</sup>, A. B. HILL<sup>270,229</sup>,  
D. HORAN<sup>245</sup>, T. JOGLER<sup>229</sup>, G. JÓHANNESSEN<sup>271</sup>, A. S. JOHNSON<sup>229</sup>, S. KENSEI<sup>260</sup>, D. KOCEVSKI<sup>244</sup>, M. KUSS<sup>240</sup>,  
G. LA MURA<sup>239,268</sup>, S. LARSSON<sup>233,231</sup>, L. LATRONICO<sup>242</sup>, J. LI<sup>272</sup>, L. LI<sup>233,231</sup>, F. LONGO<sup>236,237</sup>, F. LOPARCO<sup>249,241</sup>,  
M. N. LOVELLETTE<sup>266</sup>, P. LUBRANO<sup>253</sup>, J. MAGILL<sup>264</sup>, S. MALDERA<sup>242</sup>, A. MANFREDI<sup>240</sup>, M. MARELLI<sup>250</sup>,  
M. MAYER<sup>227</sup>, M. N. MAZZIOTTA<sup>241</sup>, J. E. MCENERY<sup>244,264,273</sup>, M. MEYER<sup>230,231</sup>, P. F. MICHELSON<sup>229</sup>,  
N. MIRABAL<sup>244,267</sup>, T. MIZUNO<sup>274</sup>, A. A. MOISEEV<sup>247,264</sup>, M. E. MONZANI<sup>229</sup>, E. MORETTI<sup>275</sup>, A. MORSELLI<sup>263</sup>,  
I. V. MOSKALENKO<sup>229</sup>, M. NEGRO<sup>242,243</sup>, E. NUSS<sup>254</sup>, T. OHSUGI<sup>274</sup>, N. OMODEI<sup>229</sup>, M. ORIENTI<sup>256</sup>, E. ORLANDO<sup>229</sup>,  
J. F. ORMES<sup>276</sup>, D. PANEQUE<sup>275,229</sup>, J. S. PERKINS<sup>244</sup>, M. PESCE-ROLLINS<sup>240,229</sup>, F. PIRON<sup>254</sup>, G. PIVATO<sup>240</sup>,  
T. A. PORTER<sup>229</sup>, J. L. RACUSIN<sup>244</sup>, S. RAINÒ<sup>249,241</sup>, R. RANDO<sup>238,239</sup>, S. RAZZAQUE<sup>277</sup>, A. REIMER<sup>268,229</sup>,  
O. REIMER<sup>268,229</sup>, D. SALVETTI<sup>250</sup>, P. M. SAZ PARKINSON<sup>232,278,279</sup>, C. SGRÒ<sup>240</sup>, D. SIMONE<sup>241</sup>, E. J. SISKIND<sup>280</sup>,  
F. SPADA<sup>240</sup>, G. SPANDRE<sup>240</sup>, P. SPINELLI<sup>249,241</sup>, D. J. SUSON<sup>281</sup>, H. TAJIMA<sup>282,229</sup>, J. B. THAYER<sup>229</sup>,  
D. J. THOMPSON<sup>244</sup>, L. TIBALDO<sup>283</sup>, D. F. TORRES<sup>272,284</sup>, E. TROJA<sup>244,264</sup>, Y. UCHIYAMA<sup>285</sup>, T. M. VENTERS<sup>244</sup>,  
G. VIANELLO<sup>229</sup>, K. S. WOOD<sup>266</sup>, M. WOOD<sup>229</sup>, S. ZHU<sup>264</sup>, S. ZIMMER<sup>230,231</sup>

The *Fermi* LAT Collaboration

E. BROCATO<sup>286</sup>, E. CAPPELLARO<sup>287</sup>, S. COVINO<sup>288</sup>, A. GRADO<sup>289</sup>, L. NICASTRO<sup>290</sup>, E. PALAZZI<sup>290</sup>, E. PIAN<sup>290,291</sup>,  
L. AMATI<sup>290</sup>, L. A. ANTONELLI<sup>286,292</sup>, M. CAPACCIOLI<sup>293</sup>, P. D'AVANZO<sup>288</sup>, V. D'ELIA<sup>286,292</sup>, F. GETMAN<sup>289</sup>,  
G. GIUFFRIDA<sup>286,292</sup>, G. IANNICOLA<sup>286</sup>, L. LIMATOLA<sup>289</sup>, M. LISI<sup>286</sup>, S. MARINONI<sup>286,292</sup>, P. MARRESE<sup>286,287</sup>,  
A. MELANDRI<sup>288</sup>, S. PIRANOMONTE<sup>286</sup>, A. POSSENTI<sup>294</sup>, L. PULONE<sup>286</sup>, A. ROSSI<sup>290</sup>, A. STAMERRA<sup>291,295</sup>,  
L. STELLA<sup>286</sup>, V. TESTA<sup>286</sup>, L. TOMASELLA<sup>287</sup>, S. YANG<sup>287</sup>

The GRAvitational Wave Inaf TeAm (GRAWITA)

A. BAZZANO<sup>296</sup>, E. BOZZO<sup>297</sup>, S. BRANDT<sup>298</sup>, T. J.-L. COURVOISIER<sup>297</sup>, C. FERRIGNO<sup>297</sup>, L. HANLON<sup>299</sup>,  
E. KUULKERS<sup>300</sup>, P. LAURENT<sup>301</sup>, S. MEREGHETTI<sup>302</sup>, J. P. ROQUES<sup>303</sup>, V. SAVCHENKO<sup>304</sup>, P. UBERTINI<sup>296</sup>

The *INTEGRAL* Collaboration

M. M. KASLIWAL<sup>305</sup>, L. P. SINGER<sup>39,215</sup>, Y. CAO<sup>305</sup>, G. DUGGAN<sup>305</sup>, S. R. KULKARNI<sup>305</sup>, V. BHALERAO<sup>14</sup>,  
A. A. MILLER<sup>185,305,306</sup>, T. BARLOW<sup>305</sup>, E. BELLM<sup>305</sup>, I. MANULIS<sup>307</sup>, J. RANA<sup>14</sup>, R. LAHER<sup>308</sup>, F. MASCI<sup>308</sup>,  
J. SURACE<sup>308</sup>, U. REBBAPRAGADA<sup>185</sup>, D. COOK<sup>305</sup>, A. VAN SISTINE<sup>16</sup>, B. SESAR<sup>309</sup>, D. PERLEY<sup>310</sup>, R. FERRETI<sup>311</sup>,  
T. PRINCE<sup>305</sup>, R. KENDRICK<sup>312</sup>, A. HORESH<sup>307</sup>

The Intermediate Palomar Transient Factory (iPTF) Collaboration

K. HURLEY<sup>313</sup>, S. V. GOLENETSKII<sup>314</sup>, R. L. APTEKAR<sup>314</sup>, D. D. FREDERIKS<sup>314</sup>, D. S. SVINKIN<sup>314</sup>, A. RAU<sup>222</sup>,  
A. VON KIENLIN<sup>222</sup>, X. ZHANG<sup>222</sup>, D. M. SMITH<sup>232</sup>, T. CLINE<sup>39,315</sup>, H. KRIMM<sup>247,316</sup>

The InterPlanetary Network

F. ABE<sup>317</sup>, M. DOI<sup>318</sup>, K. FUJISAWA<sup>319</sup>, K. S. KAWABATA<sup>320</sup>, T. MOROKUMA<sup>318</sup>, K. MOTOHARA<sup>318</sup>, M. TANAKA<sup>321</sup>,  
K. OHTA<sup>322</sup>, K. YANAGISAWA<sup>323</sup>, M. YOSHIDA<sup>320</sup>

The J-GEM Collaboration

C. BALTAY<sup>324</sup>, D. RABINOWITZ<sup>324</sup>, N. ELLMAN<sup>324</sup>, S. ROSTAMI<sup>324</sup>  
The La Silla–QUEST Survey

D. F. BERSIER<sup>325</sup>, M. F. BODE<sup>325</sup>, C. A. COLLINS<sup>325</sup>, C. M. COPPERWHEAT<sup>325</sup>, M. J. DARNLEY<sup>325</sup>,  
D. K. GALLOWAY<sup>326,327</sup>, A. GOMBOC<sup>328,329</sup>, S. KOBAYASHI<sup>325</sup>, P. MAZZALI<sup>325</sup>, C. G. MUNDELL<sup>330</sup>, A. S. PIASCIK<sup>325</sup>,  
DON POLLACCO<sup>331</sup>, I. A. STEELE<sup>325</sup>, K. ULACZYK<sup>331</sup>  
The Liverpool Telescope Collaboration

J.W. BRODERICK<sup>332</sup>, R.P. FENDER<sup>333</sup>, P.G. JONKER<sup>334,52</sup>, A. ROWLINSON<sup>332,335,135</sup>, B.W. STAPPERS<sup>212</sup>,  
R.A.M.J. WIJERS<sup>335</sup>  
The Low Frequency Array (LOFAR) Collaboration

V. LIPUNOV<sup>336</sup>, E. GORBOVSKOY<sup>336</sup>, N. TYURINA<sup>336</sup>, V. KORNILOV<sup>336</sup>, P. BALANUTSA<sup>336</sup>, A. KUZNETSOV<sup>336</sup>,  
D. BUCKLEY<sup>337</sup>, R. REBOLO<sup>338</sup>, M. SERRA-RICART<sup>338</sup>, G. ISRAELIAN<sup>338</sup>, N. M. BUDNEV<sup>339</sup>, O. GRESS<sup>339</sup>,  
K. IVANOV<sup>339</sup>, V. POLESHUK<sup>339</sup>, A. TLATOV<sup>340</sup>, V. YURKOV<sup>341</sup>  
The MASTER Collaboration

N. KAWAI<sup>342</sup>, M. SERINO<sup>343</sup>, H. NEGORO<sup>344</sup>, S. NAKAHIRA<sup>345</sup>, T. MIHARA<sup>343</sup>, H. TOMIDA<sup>346</sup>, S. UENO<sup>346</sup>,  
H. TSUNEMI<sup>347</sup>, M. MATSUOKA<sup>343</sup>  
The MAXI Collaboration

S. CROFT<sup>348,349</sup>, L. FENG<sup>350</sup>, T. M. O. FRANZEN<sup>351</sup>, B. M. GAENSLER<sup>352,139,135</sup>, M. JOHNSTON-HOLLITT<sup>353</sup>,  
D. L. KAPLAN<sup>16</sup>, M. F. MORALES<sup>131</sup>, S. J. TINGAY<sup>351,135,354</sup>, R. B. WAYTH<sup>351,135</sup>, A. WILLIAMS<sup>351</sup>  
The Murchison Wide-field Array (MWA) Collaboration

S. J. SMARTT<sup>355</sup>, K. C. CHAMBERS<sup>356</sup>, K. W. SMITH<sup>355</sup>, M. E. HUBER<sup>356</sup>, D. R. YOUNG<sup>355</sup>, D. E. WRIGHT<sup>355</sup>,  
A. SCHULTZ<sup>356</sup>, L. DENNEAU<sup>356</sup>, H. FLEWELLING<sup>356</sup>, E. A. MAGNIER<sup>356</sup>, N. PRIMAK<sup>356</sup>, A. REST<sup>357</sup>, A. SHERSTYUK<sup>356</sup>,  
B. STALDER<sup>356</sup>, C. W. STUBBS<sup>358</sup>, J. TONRY<sup>356</sup>, C. WATERS<sup>356</sup>, M. WILLMAN<sup>356</sup>  
The Pan-STARRS Collaboration

F. OLIVARES E.<sup>359,360</sup>, H. CAMPBELL<sup>361</sup>, R. KOTAK<sup>355</sup>, J. SOLLERMAN<sup>311</sup>, M. SMITH<sup>26</sup>, M. DENNEFELD<sup>362</sup>,  
J. P. ANDERSON<sup>363</sup>, M. T. BOTTICELLA<sup>289</sup>, T.-W. CHEN<sup>222</sup>, M. D. VALLE<sup>289</sup>, N. ELIAS-ROSA<sup>287</sup>, M. FRASER<sup>361</sup>,  
C. INSERRA<sup>355</sup>, E. KANKARE<sup>355</sup>, T. KUPFER<sup>305</sup>, J. HARMANEN<sup>364</sup>, L. GALBANY<sup>359,365</sup>, L. LE GUILLOU<sup>366,367</sup>,  
J. D. LYMAN<sup>331</sup>, K. MAGUIRE<sup>355</sup>, A. MITRA<sup>367</sup>, M. NICHOLL<sup>171</sup>, A. RAZZA<sup>359,365</sup>, G. TERRERAN<sup>287,355</sup>,  
S. VALENTI<sup>368,369</sup>, A. GAL-YAM<sup>370</sup>  
The PESSTO Collaboration

A. ĆWIEK<sup>110</sup>, M. ĆWIOK<sup>371</sup>, L. MANKIEWICZ<sup>372</sup>, R. OPIELA<sup>372</sup>, M. ZAREMBA<sup>371</sup>, A. F. ŻARNECKI<sup>371</sup>  
The Pi of the Sky Collaboration

C. A. ONKEN<sup>20,135</sup>, R. A. SCALZO<sup>20,135</sup>, B. P. SCHMIDT<sup>20,135</sup>, C. WOLF<sup>20,135</sup>, F. YUAN<sup>20,135</sup>  
The SkyMapper Collaboration

P. A. EVANS<sup>373</sup>, J. A. KENNEA<sup>72</sup>, D. N. BURROWS<sup>72</sup>, S. CAMPANA<sup>288</sup>, S. B. CENKO<sup>39,374</sup>, P. GIOMMI<sup>292</sup>,  
F. E. MARSHALL<sup>39</sup>, J. NOUSEK<sup>72</sup>, P. O'BRIEN<sup>373</sup>, J. P. OSBORNE<sup>373</sup>, D. PALMER<sup>375</sup>, M. PERRI<sup>292,286</sup>, J. RACUSIN<sup>39</sup>,  
M. SIEGEL<sup>72</sup>, G. TAGLIAFERRI<sup>288</sup>  
The *Swift* Collaboration

A. KLOTZ<sup>376</sup>, D. TURPIN<sup>376</sup>, R. LAUGIER<sup>53</sup>  
The TAROT, Zadko, Algerian National Observatory, and C2PU Collaboration

M. BEROIZ<sup>85,377</sup>, T. PEÑUELA<sup>85,378</sup>, L. M. MACRI<sup>379</sup>, R. J. OELKERS<sup>379</sup>, D. G. LAMBAS<sup>380</sup>, R. VRECH<sup>380</sup>, J. CABRAL<sup>380</sup>,  
C. COLAZO<sup>380</sup>, M. DOMINGUEZ<sup>380</sup>, B. SANCHEZ<sup>380</sup>, S. GUROVICH<sup>380</sup>, M. LARES<sup>380</sup>, J. L. MARSHALL<sup>379</sup>,  
D. L. DEPOY<sup>379</sup>, N. PADILLA<sup>381</sup>, N. A. PEREYRA<sup>85</sup>, M. BENACQUISTA<sup>85</sup>, J. S. KEY<sup>85</sup>  
The TOROS Collaboration

N. R. TANVIR<sup>373</sup>, K. WIERSEMA<sup>373</sup>, A. J. LEVAN<sup>331</sup>, D. STEEGHS<sup>331</sup>, J. HJORTH<sup>310</sup>, J. P. U. FYNBO<sup>310</sup>, D. MALESANI<sup>310</sup>,  
 B. MILVANG-JENSEN<sup>310</sup>, D. WATSON<sup>310</sup>, J. GREINER<sup>222</sup>, M. IRWIN<sup>361</sup>, C. G. FERNANDEZ<sup>361</sup>, R. G. MCMAHON<sup>361</sup>,  
 M. BANERJI<sup>361</sup>, E. GONZALEZ-SOLARES<sup>361</sup>, S. SCHULZE<sup>381,359</sup>, A. DE U. POSTIGO<sup>382,310</sup>, C. C. THOENE<sup>382</sup>, Z. CANO<sup>383</sup>,  
 S. ROSSWOG<sup>311</sup>

The VISTA Collaboration

- <sup>1</sup>LIGO, California Institute of Technology, Pasadena, CA 91125, USA  
<sup>2</sup>Louisiana State University, Baton Rouge, LA 70803, USA  
<sup>3</sup>Università di Salerno, Fisciano, I-84084 Salerno, Italy  
<sup>4</sup>INFN, Sezione di Napoli, Complesso Universitario di Monte S. Angelo, I-80126 Napoli, Italy  
<sup>5</sup>University of Florida, Gainesville, FL 32611, USA  
<sup>6</sup>LIGO Livingston Observatory, Livingston, LA 70754, USA  
<sup>7</sup>Laboratoire d'Annecy-le-Vieux de Physique des Particules (LAPP), Université Savoie Mont Blanc, CNRS/IN2P3, F-74941 Annecy-le-Vieux, France  
<sup>8</sup>Albert-Einstein-Institut, Max-Planck-Institut für Gravitationsphysik, D-30167 Hannover, Germany  
<sup>9</sup>Nikhef, Science Park, 1098 XG Amsterdam, The Netherlands  
<sup>10</sup>LIGO, Massachusetts Institute of Technology, Cambridge, MA 02139, USA  
<sup>11</sup>Instituto Nacional de Pesquisas Espaciais, 12227-010 São José dos Campos, SP, Brazil  
<sup>12</sup>INFN, Gran Sasso Science Institute, I-67100 L'Aquila, Italy  
<sup>13</sup>INFN, Sezione di Roma Tor Vergata, I-00133 Roma, Italy  
<sup>14</sup>Inter-University Centre for Astronomy and Astrophysics, Pune 411007, India  
<sup>15</sup>International Centre for Theoretical Sciences, Tata Institute of Fundamental Research, Bangalore 560012, India  
<sup>16</sup>University of Wisconsin-Milwaukee, Milwaukee, WI 53201, USA  
<sup>17</sup>Leibniz Universität Hannover, D-30167 Hannover, Germany  
<sup>18</sup>Università di Pisa, I-56127 Pisa, Italy  
<sup>19</sup>INFN, Sezione di Pisa, I-56127 Pisa, Italy  
<sup>20</sup>Australian National University, Canberra, Australian Capital Territory 0200, Australia  
<sup>21</sup>The University of Mississippi, University, MS 38677, USA  
<sup>22</sup>California State University Fullerton, Fullerton, CA 92831, USA  
<sup>23</sup>LAL, Univ. Paris-Sud, CNRS/IN2P3, Université Paris-Saclay, Orsay, France  
<sup>24</sup>Chennai Mathematical Institute, Chennai, India  
<sup>25</sup>Università di Roma Tor Vergata, I-00133 Roma, Italy  
<sup>26</sup>School of Physics and Astronomy, University of Southampton, Southampton, SO17 1BJ, UK  
<sup>26</sup>University of Southampton, Southampton SO17 1BJ, United Kingdom  
<sup>27</sup>Universität Hamburg, D-22761 Hamburg, Germany  
<sup>28</sup>INFN, Sezione di Roma, I-00185 Roma, Italy  
<sup>29</sup>Albert-Einstein-Institut, Max-Planck-Institut für Gravitationsphysik, D-14476 Potsdam-Golm, Germany  
<sup>30</sup>APC, AstroParticule et Cosmologie, Université Paris Diderot, CNRS/IN2P3, CEA/Irfu, Observatoire de Paris, Sorbonne Paris Cité, F-75205 Paris Cedex 13, France  
<sup>31</sup>Montana State University, Bozeman, MT 59717, USA  
<sup>32</sup>Università di Perugia, I-06123 Perugia, Italy  
<sup>33</sup>INFN, Sezione di Perugia, I-06123 Perugia, Italy  
<sup>34</sup>European Gravitational Observatory (EGO), I-56021 Cascina, Pisa, Italy  
<sup>35</sup>Syracuse University, Syracuse, NY 13244, USA  
<sup>36</sup>SUPA, University of Glasgow, Glasgow G12 8QQ, United Kingdom  
<sup>37</sup>LIGO Hanford Observatory, Richland, WA 99352, USA  
<sup>38</sup>Wigner RCP, RMKI, H-1121 Budapest, Konkoly Thege Miklós út 29-33, Hungary  
<sup>39</sup>NASA/Goddard Space Flight Center, Greenbelt, MD 20771, USA  
<sup>40</sup>Columbia University, New York, NY 10027, USA  
<sup>41</sup>Stanford University, Stanford, CA 94305, USA  
<sup>42</sup>Università di Padova, Dipartimento di Fisica e Astronomia, I-35131 Padova, Italy  
<sup>43</sup>INFN, Sezione di Padova, I-35131 Padova, Italy  
<sup>44</sup>CAMK-PAN, 00-716 Warsaw, Poland  
<sup>45</sup>University of Birmingham, Birmingham B15 2TT, United Kingdom  
<sup>46</sup>Università degli Studi di Genova, I-16146 Genova, Italy



- <sup>47</sup>INFN, Sezione di Genova, I-16146 Genova, Italy
- <sup>48</sup>RRCAT, Indore MP 452013, India
- <sup>49</sup>Faculty of Physics, Lomonosov Moscow State University, Moscow 119991, Russia
- <sup>50</sup>SUPA, University of the West of Scotland, Paisley PA1 2BE, United Kingdom
- <sup>51</sup>University of Western Australia, Crawley, Western Australia 6009, Australia
- <sup>52</sup>Department of Astrophysics/IMAPP, Radboud University Nijmegen, P.O. Box 9010, 6500 GL Nijmegen, The Netherlands
- <sup>53</sup>Artemis, Université Côte d'Azur, CNRS, Observatoire Côte d'Azur, CS 34229, Nice cedex 4, France
- <sup>54</sup>MTA Eötvös University, "Lendulet" Astrophysics Research Group, Budapest 1117, Hungary
- <sup>55</sup>Institut de Physique de Rennes, CNRS, Université de Rennes 1, F-35042 Rennes, France
- <sup>56</sup>Washington State University, Pullman, WA 99164, USA
- <sup>57</sup>Università degli Studi di Urbino 'Carlo Bo', I-61029 Urbino, Italy
- <sup>58</sup>INFN, Sezione di Firenze, I-50019 Sesto Fiorentino, Firenze, Italy
- <sup>59</sup>University of Oregon, Eugene, OR 97403, USA
- <sup>60</sup>Laboratoire Kastler Brossel, UPMC-Sorbonne Universités, CNRS, ENS-PSL Research University, Collège de France, F-75005 Paris, France
- <sup>61</sup>Astronomical Observatory Warsaw University, 00-478 Warsaw, Poland
- <sup>62</sup>VU University Amsterdam, 1081 HV Amsterdam, The Netherlands
- <sup>63</sup>University of Maryland, College Park, MD 20742, USA
- <sup>64</sup>Center for Relativistic Astrophysics and School of Physics, Georgia Institute of Technology, Atlanta, GA 30332, USA
- <sup>65</sup>Institut Lumière Matière, Université de Lyon, Université Claude Bernard Lyon 1, UMR CNRS 5306, 69622 Villeurbanne, France
- <sup>66</sup>Laboratoire des Matériaux Avancés (LMA), IN2P3/CNRS, Université de Lyon, F-69622 Villeurbanne, Lyon, France
- <sup>67</sup>Universitat de les Illes Balears, IAC3—IEEC, E-07122 Palma de Mallorca, Spain
- <sup>68</sup>Università di Napoli 'Federico II', Complesso Universitario di Monte S. Angelo, I-80126 Napoli, Italy
- <sup>69</sup>Canadian Institute for Theoretical Astrophysics, University of Toronto, Toronto, Ontario M5S 3H8, Canada
- <sup>70</sup>Tsinghua University, Beijing 100084, China
- <sup>71</sup>Texas Tech University, Lubbock, TX 79409, USA
- <sup>72</sup>The Pennsylvania State University, University Park, PA 16802, USA
- <sup>73</sup>National Tsing Hua University, Hsinchu City, Taiwan 30013, R.O.C.
- <sup>74</sup>Charles Sturt University, Wagga Wagga, New South Wales 2678, Australia
- <sup>75</sup>University of Chicago, Chicago, IL 60637, USA
- <sup>76</sup>Caltech CaRT, Pasadena, CA 91125, USA
- <sup>77</sup>Korea Institute of Science and Technology Information, Daejeon 305-806, Korea
- <sup>78</sup>Carleton College, Northfield, MN 55057, USA
- <sup>79</sup>Università di Roma 'La Sapienza', I-00185 Roma, Italy
- <sup>80</sup>University of Brussels, Brussels 1050, Belgium
- <sup>81</sup>Sonoma State University, Rohnert Park, CA 94928, USA
- <sup>82</sup>Northwestern University, Evanston, IL 60208, USA
- <sup>83</sup>University of Minnesota, Minneapolis, MN 55455, USA
- <sup>84</sup>The University of Melbourne, Parkville, Victoria 3010, Australia
- <sup>85</sup>The University of Texas Rio Grande Valley, Brownsville, TX 78520, USA
- <sup>86</sup>The University of Sheffield, Sheffield S10 2TN, United Kingdom
- <sup>87</sup>University of Sannio at Benevento, I-82100 Benevento, Italy and INFN, Sezione di Napoli, I-80100 Napoli, Italy
- <sup>88</sup>Montclair State University, Montclair, NJ 07043, USA
- <sup>89</sup>Università di Trento, Dipartimento di Fisica, I-38123 Povo, Trento, Italy
- <sup>90</sup>INFN, Trento Institute for Fundamental Physics and Applications, I-38123 Povo, Trento, Italy
- <sup>91</sup>Cardiff University, Cardiff CF24 3AA, United Kingdom
- <sup>92</sup>National Astronomical Observatory of Japan, 2-21-1 Osawa, Mitaka, Tokyo 181-8588, Japan
- <sup>93</sup>School of Mathematics, University of Edinburgh, Edinburgh EH9 3FD, United Kingdom
- <sup>94</sup>Indian Institute of Technology, Gandhinagar Ahmedabad Gujarat 382424, India
- <sup>95</sup>Institute for Plasma Research, Bhat, Gandhinagar 382428, India
- <sup>96</sup>University of Szeged, Dóm tér 9, Szeged 6720, Hungary
- <sup>97</sup>Embry-Riddle Aeronautical University, Prescott, AZ 86301, USA
- <sup>98</sup>University of Michigan, Ann Arbor, MI 48109, USA
- <sup>99</sup>Tata Institute of Fundamental Research, Mumbai 400005, India
- <sup>100</sup>American University, Washington, D.C. 20016, USA

- <sup>101</sup>University of Massachusetts-Amherst, Amherst, MA 01003, USA
- <sup>102</sup>University of Adelaide, Adelaide, South Australia 5005, Australia
- <sup>103</sup>West Virginia University, Morgantown, WV 26506, USA
- <sup>104</sup>University of Białystok, 15-424 Białystok, Poland
- <sup>105</sup>SUPA, University of Strathclyde, Glasgow G1 1XQ, United Kingdom
- <sup>106</sup>IISER-TVM, CET Campus, Trivandrum Kerala 695016, India
- <sup>107</sup>Institute of Applied Physics, Nizhny Novgorod, 603950, Russia
- <sup>108</sup>Pusan National University, Busan 609-735, Korea
- <sup>109</sup>Hanyang University, Seoul 133-791, Korea
- <sup>110</sup>NCBJ, 05-400 Świerk-Otwock, Poland
- <sup>111</sup>IM-PAN, 00-956 Warsaw, Poland
- <sup>112</sup>Rochester Institute of Technology, Rochester, NY 14623, USA
- <sup>113</sup>Monash University, Victoria 3800, Australia
- <sup>114</sup>Seoul National University, Seoul 151-742, Korea
- <sup>115</sup>University of Alabama in Huntsville, Huntsville, AL 35899, USA
- <sup>116</sup>ESPCI, CNRS, F-75005 Paris, France
- <sup>117</sup>Università di Camerino, Dipartimento di Fisica, I-62032 Camerino, Italy
- <sup>118</sup>Southern University and A&M College, Baton Rouge, LA 70813, USA
- <sup>119</sup>College of William and Mary, Williamsburg, VA 23187, USA
- <sup>120</sup>Instituto de Física Teórica, University Estadual Paulista/ICTP South American Institute for Fundamental Research, São Paulo SP 01140-070, Brazil
- <sup>121</sup>University of Cambridge, Cambridge CB2 1TN, United Kingdom
- <sup>122</sup>IISER-Kolkata, Mohanpur, West Bengal 741252, India
- <sup>123</sup>Rutherford Appleton Laboratory, HSIC, Chilton, Didcot, Oxon OX11 0QX, United Kingdom
- <sup>124</sup>Whitman College, 345 Boyer Ave, Walla Walla, WA 99362 USA
- <sup>125</sup>National Institute for Mathematical Sciences, Daejeon 305-390, Korea
- <sup>126</sup>Hobart and William Smith Colleges, Geneva, NY 14456, USA
- <sup>127</sup>Janusz Gil Institute of Astronomy, University of Zielona Góra, 65-265 Zielona Góra, Poland
- <sup>128</sup>Andrews University, Berrien Springs, MI 49104, USA
- <sup>129</sup>Università di Siena, I-53100 Siena, Italy
- <sup>130</sup>Trinity University, San Antonio, TX 78212, USA
- <sup>131</sup>University of Washington, Seattle, WA 98195, USA
- <sup>132</sup>Kenyon College, Gambier, OH 43022, USA
- <sup>133</sup>Abilene Christian University, Abilene, TX 79699, USA
- <sup>134</sup>CSIRO Astronomy and Space Science, PO Box 76, Epping NSW 1710, Australia
- <sup>135</sup>ARC Centre of Excellence for All-sky Astrophysics (CAASTRO)
- <sup>136</sup>Cornell Center for Astrophysics and Planetary Science, Ithaca, NY 14853, USA
- <sup>137</sup>Department of Physics and Electronics, Rhodes University, PO Box 94, Grahamstown, 6140, South Africa
- <sup>138</sup>CSIRO Astronomy and Space Science, 26 Dick Perry Avenue, Technology Park, Kensington WA 6151
- <sup>139</sup>Sydney Institute for Astronomy, School of Physics, The University of Sydney, NSW 2006, Australia
- <sup>140</sup>International Centre for Radio Astronomy Research (ICRAR), The University of Western Australia, M468, 35 Stirling Highway, Crawley, Perth, WA, 6009, Australia
- <sup>141</sup>Instituto de Astrofísica de Andalucía (IAA-CSIC), P.O. Box 03004, E-18080 Granada, Spain
- <sup>142</sup>Departamento de Ingeniería de Sistemas y Automática, Escuela de Ingenierías, Universidad de Málaga, Unidad Asociada al CSIC, Dr. Pedro Ortiz Ramos, 29071 Málaga, Spain
- <sup>143</sup>Astronomical Institute, Academy of Sciences of the Czech Republic 251 65 Ondřejov, Czech Rep.
- <sup>144</sup>Institute of Physics of the Czech Academy of Sciences, Na Slovance 1999/2, 182 21 Praha 8, Czech Republic
- <sup>145</sup>Nikolaev National University, Nikolska str. 24, 54030 Nikolaev, Ukraine
- <sup>146</sup>Facultad de Ciencias, Universidad de Málaga, Bulevard Louis Pasteur, 29010 Málaga, Spain
- <sup>147</sup>Enseñanza Virtual y Laboratorios Tecnológicos, Universidad de Málaga, Jiménez Fraud 10, 29071 Málaga, Spain
- <sup>148</sup>ISDEFE for the SMOS FOS (ESA-ESAC), 28692 Villanueva de la Cañada (Madrid), Spain
- <sup>149</sup>Czech Technical University, Faculty of Electrical Engineering, Dep. of Radioelectronics, Technická 2 166 27 Praha, Czech Republic
- <sup>150</sup>Astronomical Institute of the Academy of Sciences, Boční II 1401, CZ-14100 Praha 4, Czech Republic
- <sup>151</sup>Estación de Sondeos Atmosféricos (ESAt) de El Arenosillo (CEDEA-INTA), 21130 Mazagón, Huelva, Spain
- <sup>152</sup>Departamento de Ingeniería Electrónica, Sistemas Informáticos y Automática, Universidad de Huelva, E.T.S.I. de La Rábida, 21819 Palos de la Frontera

(Huelva), Spain

- <sup>153</sup>Instituto de Hortofruticultura Subtropical y Mediterránea La Mayora (IHSM/UMA-CSIC), 29750 Algarrobo Costa (Málaga), Spain
- <sup>154</sup>Department of Physics, University of Auckland, Private Bag 92019, New Zealand
- <sup>155</sup>Vintage Lane Observatory, RD3, 7273 Blenheim, New Zealand
- <sup>156</sup>National Institute of Water and Atmospheric Research (NIWA), Lauder, New Zealand
- <sup>157</sup>Department of Physics, Sungkyunkwan University (SKKU), Suwon, Korea
- <sup>158</sup>Yunnan Astronomical Observatory, CAS, Kunming 650011, Yunnan, China
- <sup>159</sup>National Astronomical Observatory, Chinese Academy of Sciences, Beijing 100012, China
- <sup>160</sup>Instituto de Astronomía, Universidad Nacional Autónoma de México, 22800 Ensenada, Baja California, México
- <sup>161</sup>Instituto de Astronomía, Universidad Nacional Autónoma de México, Apdo Postal 70-264, Cd. Universitaria, 04510 México DF, México
- <sup>162</sup>Aryabhata Research Institute of Observational Sciences, Manora Peak, Nainital - 263 002, India
- <sup>163</sup>Escuela Politécnica Superior, Universidad de Cádiz, Avda. Ramón Puyol, 11202 Algeciras (Cádiz), Spain
- <sup>164</sup>División de Ciencias del Espacio, Instituto Nacional de Técnica Aeroespacial (INTA), 28850 Torrejón de Ardoz (Madrid), Spain
- <sup>165</sup>Cerro Tololo Inter-American Observatory, National Optical Astronomy Observatory, Casilla 603, La Serena, Chile
- <sup>166</sup>Department of Physics & Astronomy, University College London, Gower Street, London, WC1E 6BT, UK
- <sup>167</sup>Fermi National Accelerator Laboratory, P. O. Box 500, Batavia, IL 60510, USA
- <sup>168</sup>Department of Astrophysical Sciences, Princeton University, Peyton Hall, Princeton, NJ 08544, USA
- <sup>169</sup>CNRS, UMR 7095, Institut d'Astrophysique de Paris, F-75014, Paris, France
- <sup>170</sup>Sorbonne Universités, UPMC Univ Paris 06, UMR 7095, Institut d'Astrophysique de Paris, F-75014, Paris, France
- <sup>171</sup>Harvard-Smithsonian Center for Astrophysics, 60 Garden St, Cambridge, MA 02138, United States
- <sup>172</sup>Carnegie Observatories, 813 Santa Barbara St., Pasadena, CA 91101, USA
- <sup>173</sup>Department of Physics and Astronomy, University of Pennsylvania, Philadelphia, PA 19104, USA
- <sup>174</sup>Kavli Institute for Particle Astrophysics & Cosmology, P. O. Box 2450, Stanford University, Stanford, CA 94305, USA
- <sup>175</sup>SLAC National Accelerator Laboratory, Menlo Park, CA 94025, USA
- <sup>176</sup>Institute of Cosmology & Gravitation, University of Portsmouth, Portsmouth, PO1 3FX, UK
- <sup>177</sup>Institut de Ciències de l'Espai, IEEC-CSIC, Campus UAB, Carrer de Can Magrans, s/n, 08193 Bellaterra, Barcelona, Spain
- <sup>178</sup>Institut de Física d'Altes Energies (IFAE), The Barcelona Institute of Science and Technology, Campus UAB, 08193 Bellaterra (Barcelona) Spain
- <sup>179</sup>Astrophysical Institute, Department of Physics and Astronomy, 251B Clippinger Lab, Ohio University, Athens, OH 45701, USA
- <sup>180</sup>Laboratório Interinstitucional de e-Astronomia - LIneA, Rua Gal. José Cristino 77, Rio de Janeiro, RJ - 20921-400, Brazil
- <sup>182</sup>Excellence Cluster Universe, Boltzmannstr. 2, 85748 Garching, Germany
- <sup>183</sup>Faculty of Physics, Ludwig-Maximilians-Universität, Scheinerstr. 1, 81679 Munich, Germany
- <sup>184</sup>Kavli Institute for Cosmological Physics, University of Chicago, Chicago, IL 60637, USA
- <sup>185</sup>Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA 91109, USA
- <sup>186</sup>Department of Astronomy, University of Illinois, 1002 W. Green Street, Urbana, IL 61801, USA
- <sup>187</sup>Department of Physics, University of Illinois, 1110 W. Green St., Urbana, IL 61801, USA
- <sup>188</sup>University of Arizona, Steward Observatory, University of Arizona, 933 N. Cherry Avenue, Tucson, AZ 85721
- <sup>189</sup>Department of Astronomy & Astrophysics, Center for Particle & Gravitational Astrophysics, and Center for Theoretical & Observational Cosmology, Pennsylvania State University, University Park, PA 16802, USA
- <sup>190</sup>CCS Division, Los Alamos National Laboratory, Los Alamos, NM 87545
- <sup>191</sup>Department of Physics, University of Michigan, Ann Arbor, MI 48109, USA
- <sup>192</sup>Department of Astronomy, University of California, Berkeley, 501 Campbell Hall, Berkeley, CA 94720, USA
- <sup>193</sup>Lawrence Berkeley National Laboratory, 1 Cyclotron Road, Berkeley, CA 94720, USA
- <sup>194</sup>National Center for Supercomputing Applications, 1205 West Clark St., Urbana, IL 61801, USA
- <sup>195</sup>Center for Cosmology and Astro-Particle Physics, The Ohio State University, Columbus, OH 43210, USA
- <sup>196</sup>Department of Physics, The Ohio State University, Columbus, OH 43210, USA
- <sup>197</sup>Departments of Physics and Astronomy, University of California, Berkeley
- <sup>198</sup>Australian Astronomical Observatory, North Ryde, NSW 2113, Australia
- <sup>199</sup>George P. and Cynthia Woods Mitchell Institute for Fundamental Physics and Astronomy, and Department of Physics and Astronomy, Texas A&M University, College Station, TX 77843, USA
- <sup>200</sup>Departamento de Física Matemática, Instituto de Física, Universidade de São Paulo, CP 66318, CEP 05314-970, São Paulo, SP, Brazil
- <sup>201</sup>Center for Cosmology and Particle Physics, New York University, 4 Washington Place, New York, NY 10003, USA
- <sup>202</sup>Department of Astronomy, The Ohio State University, Columbus, OH 43210, USA
- <sup>203</sup>National Optical Astronomy Observatory, 950 North Cherry Avenue, Tucson, AZ, 85719
- <sup>204</sup>Columbia Astrophysics Laboratory, Pupin Hall, New York, NY, 10027, USA

- <sup>205</sup>Department of Astronomy, University of Michigan, Ann Arbor, MI 48109, USA
- <sup>206</sup>Institució Catalana de Recerca i Estudis Avançats, E-08010 Barcelona, Spain
- <sup>207</sup>Department of Astronomy & Theoretical Astrophysics Center, University of California, Berkeley, CA 94720-3411, USA
- <sup>208</sup>Department of Physics and Astronomy, Pevensey Building, University of Sussex, Brighton, BN1 9QH, UK
- <sup>209</sup>Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas (CIEMAT), Madrid, Spain
- <sup>210</sup>Brookhaven National Laboratory, Bldg 510, Upton, NY 11973, USA
- <sup>211</sup>Argonne National Laboratory, 9700 South Cass Avenue, Lemont, IL 60439, USA
- <sup>212</sup>Jodrell Bank Center for Astrophysics, School of Physics and Astronomy, University of Manchester, Oxford Road, Manchester, M13 9PL, UK
- <sup>213</sup>Universities Space Research Association, 320 Sparkman Dr. Huntsville, AL 35806, USA
- <sup>214</sup>Physics Dept, University of Alabama in Huntsville, 320 Sparkman Dr., Huntsville, AL 35899, USA
- <sup>215</sup>NASA Postdoctoral Program Fellow
- <sup>216</sup>Astrophysics Office, ZP12, NASA/Marshall Space Flight Center, Huntsville, AL 35812, USA
- <sup>217</sup>Dept. of Space Science, University of Alabama in Huntsville, 320 Sparkman Dr., Huntsville, AL 35899, USA
- <sup>218</sup>CSPAR, University of Alabama in Huntsville, 320 Sparkman Dr., Huntsville, AL 35899, USA
- <sup>219</sup>Instituto de Astrofísica de Andalucía (IAA-CSIC), P.O. Box 03004, E-18080 Granada, Spain
- <sup>220</sup>Istituto Nazionale di Fisica Nucleare, Sezione di Bari, 70126 Bari, Italy
- <sup>221</sup>Jacobs Technology, Inc., Huntsville, AL, USA
- <sup>222</sup>Max-Planck-Institut für Extraterrestrische Physik, Giessenbachstraße 1, 85748, Garching, Germany
- <sup>223</sup>Los Alamos National Laboratory, NM 87545, USA
- <sup>224</sup>School of Physics, University College Dublin, Belfield, Stillorgan Road, Dublin 4, Ireland
- <sup>225</sup>NASA Headquarters, Washington DC, USA
- <sup>226</sup>Excellence Cluster Universe, Technische Universität München, Boltzmannstr. 2, 85748, Garching, Germany
- <sup>227</sup>Deutsches Elektronen Synchrotron DESY, D-15738 Zeuthen, Germany
- <sup>228</sup>Department of Physics and Astronomy, Clemson University, Kinard Lab of Physics, Clemson, SC 29634-0978, USA
- <sup>229</sup>W. W. Hansen Experimental Physics Laboratory, Kavli Institute for Particle Astrophysics and Cosmology, Department of Physics and SLAC National Accelerator Laboratory, Stanford University, Stanford, CA 94305, USA
- <sup>230</sup>Department of Physics, Stockholm University, AlbaNova, SE-106 91 Stockholm, Sweden
- <sup>231</sup>The Oskar Klein Centre for Cosmoparticle Physics, AlbaNova, SE-106 91 Stockholm, Sweden
- <sup>232</sup>Santa Cruz Institute for Particle Physics, Department of Physics and Department of Astronomy and Astrophysics, University of California at Santa Cruz, Santa Cruz, CA 95064, USA
- <sup>233</sup>Department of Physics, KTH Royal Institute of Technology, AlbaNova, SE-106 91 Stockholm, Sweden
- <sup>234</sup>Tokyo Metropolitan University, Department of Physics, Minami-osawa 1-1, Hachioji, Tokyo 192-0397, Japan
- <sup>235</sup>Università di Pisa and Istituto Nazionale di Fisica Nucleare, Sezione di Pisa I-56127 Pisa, Italy
- <sup>236</sup>Istituto Nazionale di Fisica Nucleare, Sezione di Trieste, I-34127 Trieste, Italy
- <sup>237</sup>Dipartimento di Fisica, Università di Trieste, I-34127 Trieste, Italy
- <sup>238</sup>Istituto Nazionale di Fisica Nucleare, Sezione di Padova, I-35131 Padova, Italy
- <sup>239</sup>Dipartimento di Fisica e Astronomia “G. Galilei”, Università di Padova, I-35131 Padova, Italy
- <sup>240</sup>Istituto Nazionale di Fisica Nucleare, Sezione di Pisa, I-56127 Pisa, Italy
- <sup>241</sup>Istituto Nazionale di Fisica Nucleare, Sezione di Bari, I-70126 Bari, Italy
- <sup>242</sup>Istituto Nazionale di Fisica Nucleare, Sezione di Torino, I-10125 Torino, Italy
- <sup>243</sup>Dipartimento di Fisica Generale “Amadeo Avogadro”, Università degli Studi di Torino, I-10125 Torino, Italy
- <sup>244</sup>NASA Goddard Space Flight Center, Greenbelt, MD 20771, USA
- <sup>245</sup>Laboratoire Leprince-Ringuet, École polytechnique, CNRS/IN2P3, Palaiseau, France
- <sup>246</sup>Department of Physics and Center for Space Sciences and Technology, University of Maryland Baltimore County, Baltimore, MD 21250, USA
- <sup>247</sup>Center for Research and Exploration in Space Science and Technology (CRESSST) and NASA Goddard Space Flight Center, Greenbelt, MD 20771, USA
- <sup>248</sup>Consorzio Interuniversitario per la Fisica Spaziale (CIFS), I-10133 Torino, Italy
- <sup>249</sup>Dipartimento di Fisica “M. Merlin” dell’Università e del Politecnico di Bari, I-70126 Bari, Italy
- <sup>250</sup>INAF-Istituto di Astrofisica Spaziale e Fisica Cosmica, I-20133 Milano, Italy
- <sup>251</sup>Agenzia Spaziale Italiana (ASI) Science Data Center, I-00133 Roma, Italy
- <sup>252</sup>College of Science, George Mason University, Fairfax, VA 22030, resident at Naval Research Laboratory, Washington, DC 20375, USA
- <sup>253</sup>Istituto Nazionale di Fisica Nucleare, Sezione di Perugia, I-06123 Perugia, Italy
- <sup>254</sup>Laboratoire Univers et Particules de Montpellier, Université Montpellier, CNRS/IN2P3, Montpellier, France
- <sup>255</sup>Department of Physics and Astronomy, Sonoma State University, Rohnert Park, CA 94928-3609, USA
- <sup>256</sup>INAF Istituto di Radioastronomia, I-40129 Bologna, Italy

- <sup>257</sup>Dipartimento di Astronomia, Università di Bologna, I-40127 Bologna, Italy
- <sup>258</sup>Università Telematica Pegaso, Piazza Trieste e Trento, 48, I-80132 Napoli, Italy
- <sup>259</sup>Università di Udine, I-33100 Udine, Italy
- <sup>260</sup>Department of Physical Sciences, Hiroshima University, Higashi-Hiroshima, Hiroshima 739-8526, Japan
- <sup>261</sup>Erlangen Centre for Astroparticle Physics, D-91058 Erlangen, Germany
- <sup>262</sup>Instituto de Astrofísica, Facultad de Física, Pontificia Universidad Católica de Chile, Casilla 306, Santiago 22, Chile
- <sup>263</sup>Istituto Nazionale di Fisica Nucleare, Sezione di Roma “Tor Vergata”, I-00133 Roma, Italy
- <sup>264</sup>Department of Physics and Department of Astronomy, University of Maryland, College Park, MD 20742, USA
- <sup>265</sup>Laboratoire AIM, CEA-IRFU/CNRS/Université Paris Diderot, Service d’Astrophysique, CEA Saclay, F-91191 Gif sur Yvette, France
- <sup>266</sup>Space Science Division, Naval Research Laboratory, Washington, DC 20375-5352, USA
- <sup>267</sup>NASA Postdoctoral Program Fellow, USA
- <sup>268</sup>Institut für Astro- und Teilchenphysik and Institut für Theoretische Physik, Leopold-Franzens-Universität Innsbruck, A-6020 Innsbruck, Austria
- <sup>269</sup>University of North Florida, Department of Physics, 1 UNF Drive, Jacksonville, FL 32224, USA
- <sup>270</sup>School of Physics and Astronomy, University of Southampton, Highfield, Southampton, SO17 1BJ, UK
- <sup>271</sup>Science Institute, University of Iceland, IS-107 Reykjavik, Iceland
- <sup>272</sup>Institute of Space Sciences (IEEC-CSIC), Campus UAB, E-08193 Barcelona, Spain
- <sup>273</sup>email: Julie.E.McEnery@nasa.gov
- <sup>274</sup>Hiroshima Astrophysical Science Center, Hiroshima University, Higashi-Hiroshima, Hiroshima 739-8526, Japan
- <sup>275</sup>Max-Planck-Institut für Physik, D-80805 München, Germany
- <sup>276</sup>Department of Physics and Astronomy, University of Denver, Denver, CO 80208, USA
- <sup>277</sup>Department of Physics, University of Johannesburg, PO Box 524, Auckland Park 2006, South Africa
- <sup>278</sup>Department of Physics, The University of Hong Kong, Pokfulam Road, Hong Kong, China
- <sup>279</sup>The University of Hong Kong, Laboratory for Space Research, Hong Kong, China
- <sup>280</sup>NYCB Real-Time Computing Inc., Lattingtown, NY 11560-1025, USA
- <sup>281</sup>Department of Chemistry and Physics, Purdue University Calumet, Hammond, IN 46323-2094, USA
- <sup>282</sup>Solar-Terrestrial Environment Laboratory, Nagoya University, Nagoya 464-8601, Japan
- <sup>283</sup>Max-Planck-Institut für Kernphysik, D-69029 Heidelberg, Germany
- <sup>284</sup>Institució Catalana de Recerca i Estudis Avançats (ICREA), Barcelona, Spain
- <sup>285</sup>Department of Physics, 3-34-1 Nishi-Ikebukuro, Toshima-ku, Tokyo 171-8501, Japan
- <sup>286</sup>INAF - Osservatorio Astronomico di Roma, via Frascati 33, I-00078 Monte Porzio Catone (RM), Italy
- <sup>287</sup>INAF - Osservatorio Astronomico di Padova, Vicolo Osservatorio 5, I-35122 Padova, Italy
- <sup>288</sup>INAF - Osservatorio Astronomico di Brera, via E. Bianchi 46, I-23807 Merate, Italy
- <sup>289</sup>INAF - Osservatorio Astronomico di Capodimonte, salita Moiarriello 16, I-80131 Napoli, Italy
- <sup>290</sup>INAF - Istituto di Astrofisica Spaziale e Fisica Cosmica di Bologna, via Gobetti 101, I-40129 Bologna, Italy
- <sup>291</sup>Scuola Normale Superiore, Piazza dei Cavalieri, 7, I-56126 Pisa, Italy
- <sup>292</sup>ASI-Science Data Center, via dl Politecnico s.n.c., I-00133 Roma, Italy
- <sup>293</sup>Dip. di Fisica Ettore Pancini, University of Naples Federico II, C.U. Monte Sant’Angelo, Via Cinthia, I-80126, Napoli, Italy
- <sup>294</sup>INAF - ORA - Osservatorio Astronomico di Cagliari, Via della Scienza n. 5, I-09047 Selargius (CA), Italy
- <sup>295</sup>INAF - Osservatorio Astronomico di Torino, Strada Osservatorio 20, I-10025, Pino Torinese (To), Italy
- <sup>296</sup>INAF-Institute for Space Astrophysics and Planetology, Via Fosso del Cavaliere 100, 00133-Rome, Italy
- <sup>297</sup>ISDC, Department of astronomy, University of Geneva, chemin d’Écogia, 16 CH-1290 Versoix, Switzerland
- <sup>298</sup>DTU Space - National Space Institute Elektrovej - Building 327 DK-2800 Kongens Lyngby Denmark
- <sup>299</sup>Space Science Group, School of Physics, University College Dublin, Belfield, Dublin 4, Ireland
- <sup>300</sup>European Space Astronomy Centre (ESA/ESAC), Science Operations Department, 28691, Villanueva de la Ca nada, Madrid, Spain
- <sup>301</sup>APC, AstroParticule et Cosmologie, Université Paris Diderot, CNRS/IN2P3, CEA/Irfu, Observatoire de Paris, Sorbonne Paris Cité, 10 rue Alice Domont et Léonie Duquet, 75205 Paris Cedex 13, France
- <sup>302</sup>INAF, IASF-Milano, via E.Bassini 15, I-20133 Milano, Italy
- <sup>303</sup>Université Toulouse; UPS-OMP; CNRS; IRAP; 9 Av. Roche, BP 44346, F-31028 Toulouse, France
- <sup>304</sup>François Arago Centre, APC, Université Paris Diderot, CNRS/IN2P3, CEA/Irfu, Observatoire de Paris., Sorbonne Paris Cité, 10 rue Alice Domon et Léonie Duquet, 75205 Paris Cedex 13, France
- <sup>305</sup>Cahill Center for Astrophysics, California Institute of Technology, Pasadena, CA 91125, USA
- <sup>306</sup>Hubble Fellow
- <sup>307</sup>Department of Particle Physics and Astrophysics, Weizmann Institute of Science, 76100 Rehovot, Israel
- <sup>308</sup>Infrared Processing and Analysis Center, California Institute of Technology, Pasadena, CA 91125, USA

- <sup>309</sup>Max Planck Institute for Astronomy, Knigstuhl 17, D-69117 Heidelberg, Germany
- <sup>310</sup>Dark Cosmology Centre, Niels Bohr Institute, Juliane Maries Vej 30, Copenhagen, DK-2100, Denmark
- <sup>311</sup>Department of Astronomy and the Oskar Klein Centre, Stockholm University, AlbaNova, SE-106 91 Stockholm, Sweden
- <sup>312</sup>Lockheed Martin Space Systems Company, Palo Alto, CA 94304
- <sup>313</sup>University of California, Berkeley, Space Sciences Laboratory, 7 Gauss Way, Berkeley, CA 94720-7450, USA
- <sup>314</sup>Ioffe Physical Technical Institute, Politekhnikeskaya 26, St. Petersburg, 194021, Russia
- <sup>315</sup>Emeritus
- <sup>316</sup>Universities Space Research Association, 7178 Columbia Gateway Drive, Columbia, MD 21046 USA
- <sup>317</sup>Institute for Space-Earth Environmental Research, Nagoya University, Furo-cho, Chikusa-ku, Nagoya 464-8601, Japan
- <sup>318</sup>Institute of Astronomy, Graduate School of Science, The University of Tokyo, Mitaka, Tokyo 181-0015, Japan
- <sup>319</sup>The Research Institute for Time Studies, Yamaguchi University, Yamaguchi, Yamaguchi 753-8511, Japan
- <sup>320</sup>Hiroshima Astrophysical Science Center, Hiroshima University, Higashi-Hiroshima, Hiroshima 739-8526, Japan
- <sup>321</sup>Division of Theoretical Astronomy, National Astronomical Observatory of Japan, Mitaka, Tokyo 181-8588, Japan
- <sup>322</sup>Department of Astronomy, Kyoto University, Kyoto, Kyoto 606-8502, Japan
- <sup>323</sup>Okayama Astrophysical Observatory, National Astronomical Observatory of Japan, Asakuchi, Okayama 719-0232, Japan
- <sup>324</sup>Physics Department, Yale University, New Haven, CT 06520, USA
- <sup>325</sup>Astrophysics Research Institute, Liverpool JMU, Liverpool L3 5RF, UK
- <sup>326</sup>Monash Centre for Astrophysics (MoCA), Monash University, Clayton VIC 3800, Australia
- <sup>327</sup>School of Physics & Astronomy, Monash University, Clayton VIC 3800, Australia
- <sup>328</sup>University of Nova Gorica, Vipavska 13, 5000 Nova Gorica, Slovenia
- <sup>329</sup>Faculty of Mathematics and Physics, University of Ljubljana, Jadranska 19, 1000 Ljubljana, Slovenia
- <sup>330</sup>Department of Physics, University of Bath, BA2 7AY, UK
- <sup>331</sup>University of Warwick, Department of Physics, Gibbet Hill Road, Coventry, CV4 7AL, UK
- <sup>332</sup>ASTRON, The Netherlands Institute for Radio Astronomy, Postbus 2, 7990 AA, Dwingeloo, The Netherlands
- <sup>333</sup>Astrophysics, Department of Physics, University of Oxford, Keble Road, Oxford OX1 3RH, UK
- <sup>334</sup>SRON Netherlands Institute for Space Research, Sorbonnelaan 2, 3584 CA Utrecht, the Netherlands
- <sup>335</sup>Anton Pannekoek Institute for Astronomy, University of Amsterdam, Science Park 904, 1098 XH Amsterdam, The Netherlands
- <sup>336</sup>Lomonosov Moscow State University, Sternberg Astronomical Institute, 13, Universitetskij prospekt, Moscow, 119234, Russia
- <sup>337</sup>South African Astronomical Observatory, PO Box 9, 7935 Observatory, Cape Town, South Africa
- <sup>338</sup>The Instituto de Astrofísica de Canarias, Calle Via Lactea, s/n, E-38200 La Laguna, Tenerife, Spain
- <sup>339</sup>Applied Physics Institute, Irkutsk State University, 20, Gagarin blvd., Irkutsk, 664003, Russia
- <sup>340</sup>Kislovodsk Solar Station of the Main (Pulkovo) Observatory RAS, P.O.Box 45, ul. Gagarina 100, Kislovodsk, 357700, Russia
- <sup>341</sup>Blagoveschensk State Pedagogical University, Lenin str., 104, Amur Region, Blagoveschensk, 675000, Russia
- <sup>342</sup>Department of Physics, Tokyo Institute of Technology, Meguro-ku, Tokyo 152-8851, Japan
- <sup>343</sup>MAXI team, RIKEN, 2-1 Hirosawa, Wako, Saitama 351-0198, Japan
- <sup>344</sup>Department of Physics, Nihon University, 1-8-14 Kanda-Surugadai, Chiyoda-ku, Tokyo 101-8308, Japan
- <sup>345</sup>JEM Mission Operations and Integration Center, Human Spaceflight Technology Directorate, Japan Aerospace Exploration Agency, 2-1-1 Sengen, Tsukuba, Ibaraki 305-8505, Japan
- <sup>346</sup>Institute of Space and Astronautical Science (ISAS), Japan Aerospace Exploration Agency (JAXA), 3-1-1 Yoshinodai, Chuo, Sagami-hara, Kanagawa 252-5210, Japan
- <sup>347</sup>Department of Earth and Space Science, Osaka University, 1-1 Machikaneyama, Toyonaka, Osaka 560-0043, Japan
- <sup>348</sup>University of California, Berkeley, Astronomy Dept., 501 Campbell Hall #3411, Berkeley, CA 94720, USA
- <sup>349</sup>Eureka Scientific, Inc., 2452 Delmer Street Suite 100, Oakland, CA 94602, USA
- <sup>350</sup>Kavli Institute for Astrophysics and Space Research, Massachusetts Institute of Technology, Cambridge, MA 02139, USA
- <sup>351</sup>International Centre for Radio Astronomy Research, Curtin University, Bentley, WA 6102, Australia
- <sup>352</sup>Dunlap Institute for Astronomy and Astrophysics, University of Toronto, Toronto, ON M5S 3H4, Canada
- <sup>353</sup>School of Chemical & Physical Sciences, Victoria University of Wellington, PO Box 600, Wellington 6140, New Zealand
- <sup>354</sup>Osservatorio di Radio Astronomia, Istituto Nazionale di Astrofisica, Bologna, Italy, 40123
- <sup>355</sup>Astrophysics Research Centre, School of Mathematics and Physics, Queens University Belfast, Belfast BT7 1NN, UK
- <sup>356</sup>Institute for Astronomy, University of Hawaii at Manoa, Honolulu, HI 96822, USA
- <sup>357</sup>Space Telescope Science Institute, 3700 San Martin Drive, Baltimore, MD 21218, USA
- <sup>358</sup>Department of Physics, Harvard University, Cambridge, MA 02138, USA
- <sup>359</sup>Millennium Institute of Astrophysics, Casilla 36D, Santiago, Chile
- <sup>360</sup>Departamento de Ciencias Físicas, Universidad Andres Bello, Avda. Republica 252, Santiago, Chile

- <sup>361</sup>Institute of Astronomy, University of Cambridge, Madingley Road, Cambridge CB3 0HA, UK
- <sup>362</sup>Institut d'Astrophysique de Paris, CNRS, and Université Pierre et Marie Curie, 98 bis Boulevard Arago, 75014, Paris, France
- <sup>363</sup>European Southern Observatory, Alonso de Cordova 3107, Vitacura, Santiago, Chile
- <sup>364</sup>Tuorla Observatory, Department of Physics and Astronomy, University of Turku, Väiäläntie 20, FI-21500 Piikkiö, Finland
- <sup>365</sup>Departamento de Astronomia, Universidad de Chile, Camino El Observatorio 1515, Las Condes, Santiago, Chile
- <sup>366</sup>Sorbonne Universités, UPMC Univ. Paris 06, UMR 7585, LPNHE, F-75005, Paris, France
- <sup>367</sup>CNRS, UMR 7585, Laboratoire de Physique Nucleaire et des Hautes Energies, 4 place Jussieu, 75005 Paris, France
- <sup>368</sup>Las Cumbres Observatory Global Telescope Network, 6740 Cortona Dr., Suite 102, Goleta, California 93117, USA
- <sup>369</sup>Department of Physics, University of California Santa Barbara, Santa Barbara, CA 93106, USA
- <sup>370</sup>Benozzi Center for Astrophysics, Weizmann Institute of Science, 76100 Rehovot, Israel
- <sup>371</sup>Faculty of Physics, University of Warsaw, 02-093 Warszawa, Poland
- <sup>372</sup>Center for Theoretical Physics of the Polish Academy of Sciences, 02-668 Warszawa, Poland
- <sup>373</sup>Department of Physics and Astronomy, University of Leicester, Leicester, LE1 7RH, UK
- <sup>374</sup>Joint Space-Science Institute, University of Maryland, College Park, MD 20742, USA
- <sup>375</sup>Los Alamos National Laboratory, B244, Los Alamos, NM, 87545, USA
- <sup>376</sup>L'Institut de Recherche en Astrophysique et Planétologie, CNRS UMR 5277/UPS, 14 avenue Edouard Belin, 31400 Toulouse, France
- <sup>377</sup>University of Texas at San Antonio, San Antonio, TX, USA
- <sup>378</sup>Ludwig Maximilian Universität Munich, Faculty of Physics, Schellingstrasse 4, 80799 Munich, Germany
- <sup>379</sup>Mitchell Institute for Fundamental Physics and Astronomy, Department of Physics and Astronomy, Texas A&M University, 4242 TAMU, College Station, TX 77843, USA
- <sup>380</sup>Universidad Nacional de Córdoba, IATE, Laprida 854, Córdoba, Argentina
- <sup>381</sup>Instituto de Astrofísica, Pontificia Universidad Católica de Chile, Av. Vicuña Mackenna 4860, Santiago, Chile
- <sup>382</sup>Instituto de Astrofísica de Andalucía, Consejo Superior de Investigaciones Científicas, Glorieta de la Astronomía s/n, E-18008 Granada, Spain
- <sup>383</sup>Centre for Astrophysics and Cosmology, Science Institute, University of Iceland, 107 Reykjavik, Iceland